DATASHEET - M22-K02SMC10



Self-monitoring contact elements, Screw terminals, Front fixing, 1 N/O, 2 NC, 24 V 3 A $\,$



Part no. M22-K02SMC10 Catalog No. 121474

Alternate Catalog M

M22-K02SMC10Q

No.

EL-Nummer 4315253

(Norway)

Delivery program

Derivery program		
Basic function accessories		Self-monitoring contact elements
Description		The N/O is actuated when mounted on the pushbutton.
Connection technique		Screw terminals
Fixing		Front fixing
Degree of Protection		IP20
Connection to SmartWire-DT		no
Approval		ET 16107 Sicherheit geprüft tested safety
Contacts		
N/O = Normally open		1 N/O
N/C = Normally closed		2 NC →
Notes		e safety function, by positive opening to IEC/EN 60947-5-1
Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1		
	mm	4.8
Maximum travel	mm	5.7
Minimum force for positive opening	N	30
Contact sequence		$ \begin{array}{c cccc} & \bullet & \bullet \\ & & 1 & 1 & 1 \\ & & 2 & 2 & 2 \end{array} $
Contact travel diagram, stroke in connection with front element		
Contact diagram		2.8 0 1.2 5.5
Configuration		1/4 3/6 2/5
Connection technique		Screw terminals

Technical data

General

Standards	IEC 60947-5-1	

Actuating force		n	≦ 10
Operating torque (screw terminals)		Nm	≤ 0.8
		INIII	
Degree of Protection			IP20
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +70
Terminal capacities		mm^2	
Solid		mm^2	0.75 - 2.5
Stranded		mm^2	0.5 - 2.5
Flexible with ferrule		mm^2	0.5 - 1.5
Contacts			
Rated impulse withstand voltage	U_{imp}	V AC	6000
Rated insulation voltage	Ui	V	500
Overvoltage category/pollution degree			III/3
Max. short-circuit protective device			
Fuseless		Туре	PKZM0-10/FAZ-B6/1
Fuse	gG/gL	Α	10
Switching capacity			
Rated operational current	I _e	Α	
AC-15			
115 V	I _e	Α	6
220 V 230 V 240 V	I _e	Α	6
380 V 400 V 415 V	I _e	Α	4
500 V	l _e	Α	2
DC-13			
24 V	I _e	Α	3
42 V	I _e	Α	1.7
60 V	I _e	Α	1.2
110 V	I _e	Α	0.6
220 V	I _e	Α	0.3
Auxiliary contacts			
Rated conditional short-circuit current	I_q	kA	1

Design verification as per IEC/EN 61439

Design verincation as per illo/liv 01433			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	6
Heat dissipation per pole, current-dependent	P_{vid}	W	0.11
Equipment heat dissipation, current-dependent	P_{vid}	W	0
Static heat dissipation, non-current-dependent	P_{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
EC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block (ecl@ss10.0.1-27-37-13-02 [AKN342013])

Number of contacts as change-over contact			0
Number of contacts as normally open contact			0
Number of contacts as normally closed contact			2
Number of fault-signal switches			0
Rated operation current le at AC-15, 230 V	A	A	6
Type of electric connection			Screw connection
Model			Top mounting
Mounting method			Front fastening
Lamp holder			None

Approvals

• •	
Product Standards	IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No.	E340491
UL Category Control No.	NISD
CSA File No.	012528_C_000
CSA Class No.	3211-03
North America Certification	UL listed, CSA certified
Degree of Protection	UL/CSA Type: -

Dimensions

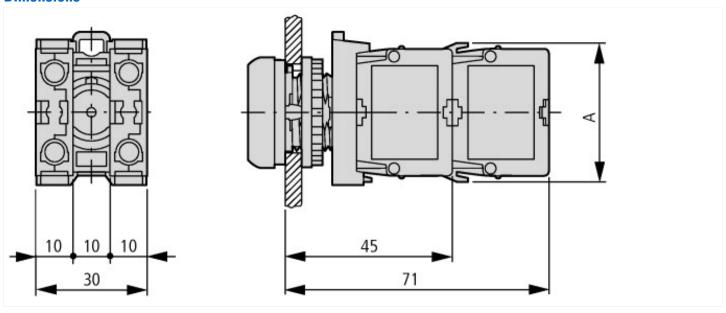

Additional product information (links)

DGUV Test Mark Customer Information

 $http://www.dguv.de/medien/dguv-test-medien/_pdf_zip_doc_ppt/agb-und-pzo/dguv_test_zeichen_infoblatt_kunden.pdf$