#### **DATASHEET - NZM2-XRD208-240AC**



Remote operator, 208-240VAC, standard

Part no. NZM2-XRD208-240AC Catalog No. 115391

EL-Nummer

0004315518



(Norway)			
Delivery program			
Product range			Accessories
Accessories			Remote operator, standard
Rated operating frequency			AC 50/60 Hz
Standard/Approval			UL/CSA, IEC
Construction size			NZM2
Description			For remote switching of circuit-breakers and switch-disconnectors.
			ON and OFF switching and resetting by means of two-wire or three-wire control.
			Local switching by hand possible.
			Lockable in the 0 position of the remote operator with up to 3 padlocks (hasp thickness: $4-8\text{mm}$ )
			Three-wire control  Three-wire control  Terminal 70/71:  NZM-XR: Contact loading according to technical data  NZM2-XRD: Full current flows through the contact during make and break!  RMQ series contact elements can be used for the NZM2(3.4)-XR(D)remote operators.
			Two-wire control  Terminal 75:  NZM-XR: Operational readiness signal when cover closed and not locked.  NZM2-XRD: Operational readiness signal when sliding switch set to Auto.
			Sliding switch with three positions:  Manual/Auto/Locked for reliable differentiation of connected positions.  AC-15: 400 V; 2 A DC-13: 220 V; 0.2 A
			Three-wire control with automatic reset to the 0 position after the switch has tripped
			Switching cycle: $ \begin{vmatrix} \hat{\mathbf{o}} & \mathbf{v} & \mathbf{v} \\ \hat{\mathbf{o}} & \mathbf{v} & \mathbf{v} \end{vmatrix} \rightarrow \mathbf{v}  $
			connection
Closing delay		ms	110 – 170
Break time		ms	110 – 170
Rated control voltage	$U_s$	V	208 - 240 V 50/60 Hz
Number of poles			3/4 pole
For use with			NZM2(-4) N(S)2(-4)
Project planning information			Sliding switch for "Auto" or "Manual"  Max. number auxiliary contacts: 2 standard auxiliary contacts, 1 trip-indicating auxiliary switches  Cannot be combined with switch-disconnector PN  Cannot be combined with mechanical interlock  Do not install M22-CK11(20/02) dual auxiliary contacts in the center auxiliary contact slot in NZM2-XBD

contact slot in NZM2-XRD

#### **Technical data**

#### **Remote operator**

Rated control voltage	$U_s$	V	
AC	$U_s$	V AC	208 - 240
Operating range			
AC		$xU_s$	0.85 - 1.1
DC		$x U_s$	0.85 - 1.1
Motor rating			
AC			
110 V 130 V AC	S	VA	550
Minimum signal duration			
with switch on		ms	100
with switch off		ms	100
Lifespan, mechanical	Operations		20000
Maximum operating frequency		Ops./h	
Max. operating frequency		Ops/h	120
Terminal capacities		$\mathrm{mm}^2$	
Solid or flexible conductor, with ferrule		$\text{mm}^2$	0,75 - 2,5
		AWG	18 14

### Design verification as per IEC/EN 61439

200:9:: 101:::0ation to por 120, 211 01 100	
EC/EN 61439 design verification	
10.2 Strength of materials and parts	
10.2.2 Corrosion resistance	Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

#### **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Motor operator for power circuit-breaker (EC001030)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Electrical drive for circuit breakers (ecl@ss10.0.1-27-37-04-12 [AKF010013])

Type of switch drive		Motor drive
Rated control supply voltage Us at AC 50HZ	V	208 - 240
Rated control supply voltage Us at AC 60HZ	V	208 - 240
Rated control supply voltage Us at DC	V	0 - 0
Voltage type for actuating		AC

# Approvals

Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL Category Control No.	DIHS
CSA File No.	022086
CSA Class No.	1437-01
North America Certification	UL listed, CSA certified

### **Dimensions**

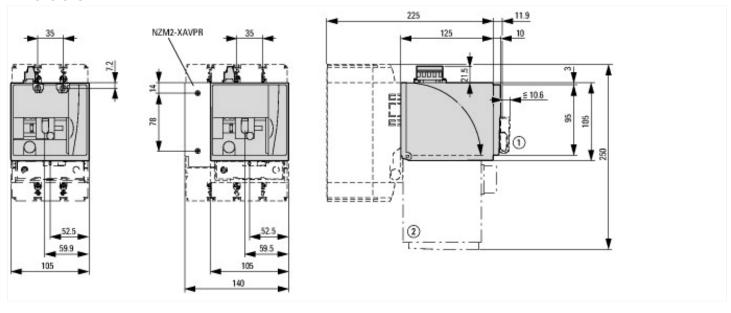

## **Additional product information (links)**

IL01219025Z (AWA1230-2405) remote operator direct NZM2	
IL01219025Z (AWA1230-2405) remote operator direct NZM2	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219025Z2019_05pdf
2/3-wire control and circuit diagrams	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.153