

Dupline® Profibus-DP Gateway Type G 3891 0020

Dupline®
Fieldbus Installationbus



- Built-in Dupline® channel generator
- PROFIBUS-DP slave according to EN 50 170
- Certified by the PNO
- PROFIBUS-DP communication speed of up to 12 MBaud
- Read/control 128 Dupline® inputs/outputs through PROFIBUS-DP
- Split-I/O mode selectable (128 inputs and 128 outputs)
- Signals from AnaLink sensors available on the DP-network
- For mounting on DIN-rail (EN 50 022)
- LED indicators for supply, Dupline® carrier and fault
- AC power supply

Product Description

Dupline® Channel Generator with the function of a PROFIBUS-DP slave. This means that the 128 Dupline® I/O's (incl. AnaLink) can be read/controlled by PROFIBUS-DP masters (PLC's, PC interface cards, etc. from various suppliers).

Several Dupline® gateways can be connected to the same PROFIBUS-DP network. The unit is certified by PNO (Profibus Nutzer Organisation) which ensures compatibility and interoperability with other PNO-certified products.

Ordering Key

G 3891 0020 230

Type: Dupline® _____

Type no. _____

Supply _____

Input/Output Specifications

PROFIBUS-DP

Pin assignment	A B RTS +5V GND	RS 485 9-pole female SUB-D Pin 8 Pin 3 Pin 4 Pin 6 Pin 5
Baudrate		Auto detection
Cable length		100 m @ 12 MBaud 200 m @ 1.5 MBaud 1200 m @ 93.75 kBaud
Up-date time (128 digital I/O)		Typ. 200 µs at 12 MBaud Typ. 1.6 ms at 1.5 MBaud
Dielectric voltage		≥ 4 kVAC (rms)
PROFIBUS-DP Dupline®		6590
PROFIBUS-DP ID-no.		G38_020.gsd
GSD-file		
Dupline		
Output voltage		8.2 V
Output current		≤ 100 mA
Short-circuit protection		Yes
Output impedance		≤ 15 Ω
Sequence time		15.2 ms 132.3 ms
8 digital I/O		3.9 s
128 digital I/O		33.8 s
AnaLink value update time		
8 signals		
128 signals		

Adjustments

2 x 10 pos. rotary switch
1 x 16 pos. rotary switch
No.
DIP-switch 1
DIP-switch 2
DIP-switch 3
DIP-switch 4

PROFIBUS Slave Address
Range 02 to 99
Dupline® channels
8 .. 128 in steps of 8
Dupline® mode (Normal/Split I/O)
Version selection
Analog protocol
Not used

Approvals

PROFIBUS operability	PNO (Profibus Nutzer Organisation)
----------------------	---------------------------------------

Conformity

CE	EMC Industrial Environment
----	----------------------------

LED Functions

Red	On Flash Off	DP-Comm fail DP- Deviceswitch in non-legal position (0,1 or 2) DP comm ok
Yellow	On Off Flashing	Dupline carrier Ok Dupline internal Powerfail Dupline Short
Green	ON OFF	Supply is on Supply not supplied to the supply terminals, which supplies the power to the internal power suply, which again drives the supply for the green supply led.



General Specifications

Power ON delay	< 2.5 s until start of Dupline carrier. < 40 s until correct reading of AnaLink values
Environment	
Degree of protection	IP 20
Pollution degree	3 (IEC 60664)
Operating temperature	0° to +50°C (+32° to +122°F)
Storage temperature	-20° to +85°C (-4° to +185°F)
Humidity (non-condensing)	20 to 80% RH
Mechanical resistance	
Shock	15 G (11 ms)
Vibration	2 G (6 to 55 Hz)
Dimensions	
Material	H8-housing
Weight	540 g

Supply Specifications

Power supply	Overvoltage cat. III (IEC 60664)
Rated operational voltage through term. 21, 22, 23 & 24	
230	See wiring diagram
115	230 VAC ± 15% (IEC 60038)
Frequency	115 VAC ± 15% (IEC 60038)
Rated operational power	45 to 65 Hz
Rated impulse withstand voltage	11 VA
230	4 kV
115	2.5 kV
Dielectric voltage	≥ 4 kVAC (rms)
Supply - Dupline®	≥ 4 kVAC (rms)
Supply - RS 485	

Wiring Diagrams

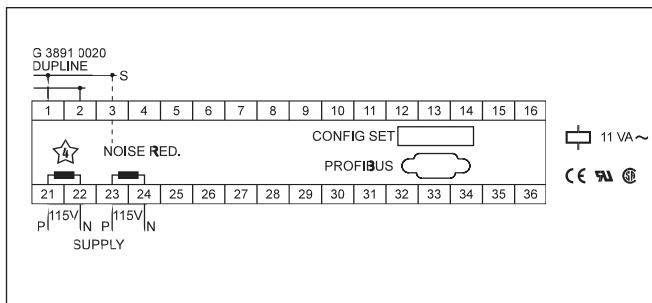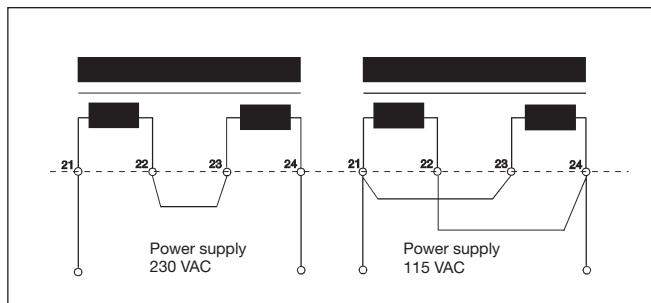

Mode of Operation

The Dupline® PROFIBUS-DP Gateway is a Dupline channel generator with the function of a PROFIBUS-DP slave according to EN 50 170. This means that the 128 Dupline® I/O's (incl. AnaLink) can be read/ controlled by PROFIBUS-DP masters like PLC's and PC interface-cards from many different suppliers. Several Dupline® gateways can be connected to the same PROFIBUS-DP network and operate together with other PROFIBUS-DP modules like operatorpanels, MMI's, frequency inverters, I/O-modules etc.

The Dupline® PROFIBUS-DP Gateway is approved by the

PNO (Profibus Nutzer Organisation) that ensures compatibility with other PNO-certified products.

Configuration Switches

The unit is equipped with the following configuration switches (see also Switch settings):

1 x 16-position rotary-switch for selecting the **Number of Dupline® channels** in the range 8..128 (in steps of 8). The selected letter indicates the last channel group available on Dupline®. If e.g. H is selected, the 64 channels in groups A..H will be available.

2 x 10-position rotary switch for selection of the

PROFIBUS-DP Slave Address in the range 02..99. (00..01 are reserved). Each module connected to PROFIBUS-DP must have a unique slave address which enables the PROFIBUS-DP Master to access the modules individually.

1 x DIP-switch for selection of **Dupline® Operation Mode**. In "Normal" mode, Dupline® operates as a peer-to-peer system where the channel generator automatically establishes a connection between Dupline®-inputs and Dupline®-outputs which are coded to the same Dupline®-address. If e.g. an input coded for B5 is activated, the output(s) coded for B5 will also be activated.

put(s) coded for B5 will also be activated.

Consequently, a Dupline®-output can either be activated through the output-data received on PROFIBUS-DP or by an active Dupline® input coded for the same Dupline®-address.

In "Split I/O" mode, the Dupline-inputs and Dupline-outputs are treated independently by the channel generator. If e.g. an input coded for B5 is activated, the Dupline®-outputs which are coded to the same Dupline®-address will also be activated. The Dupline®-outputs are

Mode of Operation (cont.)

controlled exclusively through the output data received on PROFIBUS-DP.

In this mode, up to 128 Dupline® inputs and 128 Dupline outputs are available, since an input and an output coded to the same Dupline®-address can operate independently.

1 x DIP-switch for selection of **Analog Protocol** to either AnaLink (8-bit format) or multiplex (16-bit format). The Gateway will only transfer analog values from modules using the selected protocol. If multiplex is selected, the Gateway will automatically perform the required multiplexing on channels A1-A4. Because of this, these 4 channels are not available as

outputs when the multiplex protocol is selected.

1 x DIP-switch for version selection

Normally, the version selection is supposed to be in the OFF position, especially when the Gateway is used in new installations and configured with the G38_20.GSD file.

In replacements or expansion of existing installations, this switch may be switched on, in order to make set the Gateway to operate towards the previous GSD version. (Mod-6590.GSD)

Dupline® Input Data

To ease up the **Profibus Master configuration**, the **G38_020.gsd** file is to be used. This file describes to

the Master which I/O data the gateway supports.

All I/O data are selectable through so-called modules; each described with its particular function.

Digital Input, Digital output, Analog input etc. Through this, the individual configuration of the Gateway is quite simplified, as the user only has to select which I/O modules to use. The supported modules may be selected in any order and any combination.

The G38910020 gateway supports one Digital input module, and One Digital output module, corresponding to the 128 channels of input and output data. Furthermore, when Multiplexed analog data

are selected on the Dupline, up to 112 Analog values may be read, and this is done through additional 14 Input modules named "AIn". (Mux:CD,0-7/Alink:AB)" , "AIn (Mux:CD,8-F/Alink:CD)" ... "AIn (Mux:OP,8-F)".

All modules consist of 16 bytes of data, and the tables below describe the content and the relations to the Dupline data.

If the Dupline® signal is short-circuited, the gateway will set the input status of all channels to OFF, and issue a diagnostics information to the Profibus master.

Byte 0.. 0Fh Digital input module

Byte address	Dupline Group	Bit	Channel Number
0	A	7	A1
0	A	6	A2
0	A	5	A3
0	.	.	.
0	A	0	A8
1	B	7	B1
2	C	6	C2
.	.	.	.
E	O	1	O7
F	P	0	P8

Byte 0.. 0Fh Analog input module, multiplexed

Byte address	Dupline Groups	multiplex address
0,1 (Hi,Lo)	CD	0
2,3	CD	1
4,5	CD	2
6,7	.	.
A,B	.	.
C,D	CD	6
E,F	CD	7

The multiplexed analog values are represented as 16-bit "sign and magnitude" (2 Bytes: Hi,Lo)

The most significant bit defines the sign (0:+, 1:-) while the remaining 15 bits define the magnitude (0..32768).

Byte 0.. 0Fh Digital output module


Byte address	Dupline Group	Bit	Channel Number
0	A	7	A1
0	A	6	A2
0	A	5	A3
0	.	.	.
0	A	0	A8
1	B	7	B1
2	C	6	C2
.	.	.	.
E	O	1	O7
F	P	0	P8

Byte 0.. 0Fh Analog input module, AnaLink selected


Byte address	Dupline Groups
0	A1
1	A2
3	A3
.	.
E	B7
F	C8

The AnaLink analog values are represented as 8 bit binary value ranging from 0 to 255.

Switch Settings

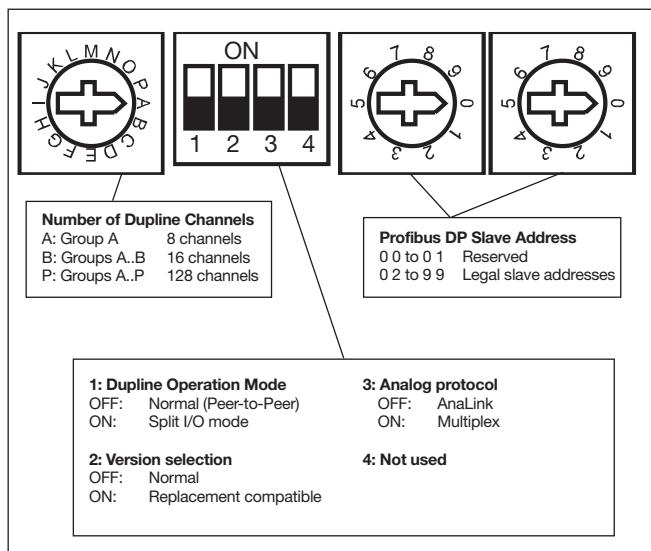

Pin Assignment

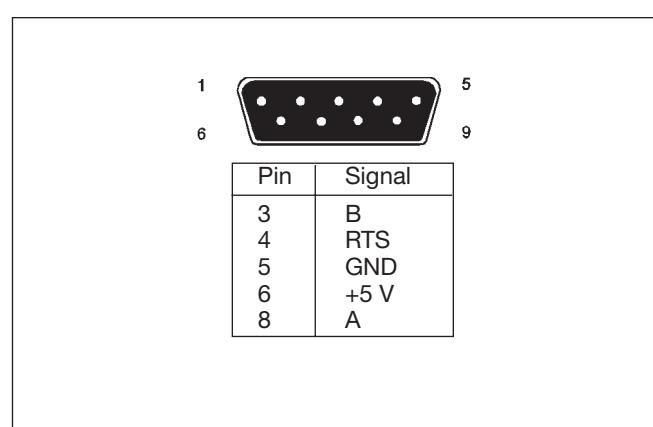

Dimensions (mm)

