



**Automatización Eléctrica**


Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

# Cylindrical Proximity Sensor E2E/E2E2

## A New Series of Easy-to-use and Tough E2E/E2E2 Models Long-size E2E2 Proximity Sensor Conforms to CENELEC

- Ideal for a variety of applications.
- With a metal connector that can be tightened securely and a cable protector.
- With an easy-to-see indicator, deeper mounting holes, and tightening flats for wrenches.
- New 3-dia. size (sensing distance: 0.6 mm) added to the lineup.

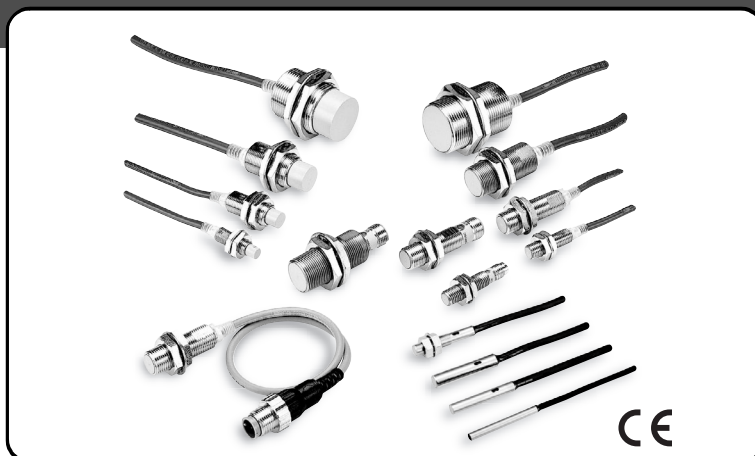

### <READ AND UNDERSTAND THIS CATALOG>

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Ordering Information

### E2E

#### DC 2-wire/Pre-wired Models







Self-diagnostic output function	Size		Sensing distance	Model	
				NO	NC
Yes	Shielded	M12	3 mm	E2E-X3D1S (See note 1.)	---
		M18	7 mm	E2E-X7D1S (See note 1.)	---
		M30	10 mm	E2E-X10D1S (See note 1.)	---
	Unshielded	M12	8 mm	E2E-X8MD1S (See note 1.)	---
		M18	14 mm	E2E-X14MD1S (See note 1.)	---
		M30	20 mm	E2E-X20MD1S (See note 1.)	---
No	Shielded	M8	2 mm	E2E-X2D1-N (See notes 2 and 3.)	E2E-X2D2-N (See note 3.)
		M12	3 mm	E2E-X3D1-N (See notes 1, 2 and 3.)	E2E-X3D2-N (See note 3.)
		M18	7 mm	E2E-X7D1-N (See notes 1, 2 and 3.)	E2E-X7D2-N (See note 3.)
		M30	10 mm	E2E-X10D1-N (See notes 1, 2 and 3.)	E2E-X10D2-N
	Unshielded	M8	4 mm	E2E-X4MD1 (See notes 2 and 3.)	E2E-X4MD2
		M12	8 mm	E2E-X8MD1 (See notes 1, 2 and 3.)	E2E-X8MD2
		M18	14 mm	E2E-X14MD1 (See notes 1, 2 and 3.)	E2E-X14MD2
		M30	20 mm	E2E-X20MD1 (See notes 1, 2 and 3.)	E2E-X20MD2

**Note 1.** In addition to the above models, E2E-X□□15 models (e.g., E2E-X3D15-N), which are different in frequency from the above models, are available.

**2.** E2E models with a robotics cable are available as well. The model number of a model with a robotics cable has the suffix “-R” (e.g., E2E-X3D1-R).

**3.** Cables with a length of 5 m are also available. Specify the cable length at the end of the model number (e.g., E2E-X3D1-N 5M).

## DC 2-wire/Connector Models

Connector	Self-diagnostic output function	Size		Sensing distance	Model		
					NO	NC	
M12	Yes		M12	3 mm	E2E-X3D1S-M1	---	
			M18	7 mm	E2E-X7D1S-M1	---	
			M30	10 mm	E2E-X10D1S-M1	---	
			M12	8 mm	E2E-X8MD1S-M1	---	
			M18	14 mm	E2E-X14MD1S-M1	---	
			M30	20 mm	E2E-X20MD1S-M1	---	
		No		M8	2 mm	E2E-X2D1-M1G	E2E-X2D2-M1G
				M12	3 mm	E2E-X3D1-M1G (See note.)	E2E-X3D2-M1G
				M18	7 mm	E2E-X7D1-M1G (See note.)	E2E-X7D2-M1G
	M30			10 mm	E2E-X10D1-M1G (See note.)	E2E-X10D2-M1G	
			M8	4 mm	E2E-X4MD1-M1G	E2E-X4MD2-M1G	
			M12	8 mm	E2E-X8MD1-M1G (See note.)	E2E-X8MD2-M1G	
			M18	14 mm	E2E-X14MD1-M1G (See note.)	E2E-X14MD2-M1G	
			M30	20 mm	E2E-X20MD1-M1G (See note.)	E2E-X20MD2-M1G	
	M8		M8	2 mm	E2E-X2D1-M3G	E2E-X2D2-M3G	
				4 mm	E2E-X4MD1-M3G	E2E-X4MD2-M3G	

**Note:** In addition to the above models, E2E-X□D15-M1G models (e.g., E2E-X3D15-M1G), which are different in frequency from the above models, are available.

## DC 2-wire/Pre-wired Connector Models

Size	Sensing distance	Operation mode	Polarity	Model
Shielded	M12	NO	Yes	E2E-X3D1-M1GJ
	M18		No	E2E-X3D1-M1J-T
	M30		Yes	E2E-X7D1-M1GJ
			No	E2E-X7D1-M1J-T
			Yes	E2E-X10D1-M1GJ
			No	E2E-X10D1-M1J-T
Unshielded	M12		Yes	E2E-X8MD1-M1GJ
	M18			E2E-X14MD1-M1GJ
	M30			E2E-X20MD1-M1GJ

**Note 1.** A model with no polarity has a residual voltage of 5 V, which must be taken into consideration together with the interface condition (the PLC's ON voltage, for example) when connecting the Proximity Sensor to a load.

**2.** The standard cable length is 300 mm. Models are also available with 500 mm and 1 m cables.


## Connector Pin Assignments of DC 2-wire Model


The connector pin assignments of each new E2E DC 2-wire conforms to IEC947-5-2 Table III.

The following E2E models with conventional connector pin assignments are available as well.

Size	Operation mode	Model	Size	Operation mode	Model
Shielded	M8	NO	Unshielded	M8	NO
		NC			NC
	M12	NO		M12	NO
		NC			NC
	M18	NO		M18	NO
		NC			NC
	M30	NO		M30	NO
		NC			NC
		E2E-X2D1-M1			E2E-X4MD1-M1
		E2E-X2D2-M1			E2E-X4MD2-M1
		E2E-X3D1-M1			E2E-X8MD1-M1
		E2E-X3D2-M1			E2E-X8MD2-M1
		E2E-X7D1-M1			E2E-X14MD1-M1
		E2E-X7D2-M1			E2E-X14MD2-M1
		E2E-X10D1-M1			E2E-X20MD1-M1
		E2E-X10D2-M1			E2E-X20MD2-M1

## DC 3-wire/Pre-wired Models

Size		Sensing distance	Output configuration	Model
Shielded 	3 dia.	0.6 mm	NPN NO	E2E-CR6C1
			NPN NC	E2E-CR6C2
			PNP NO	E2E-CR6B1
			PNP NC	E2E-CR6B2
	4 dia.	0.8 mm	NPN NO	E2E-CR8C1 (See notes 1 and 2.)
			NPN NC	E2E-CR8C2
			PNP NO	E2E-CR8B1
			PNP NC	E2E-CR8B2
	M5	1 mm	NPN NO	E2E-X1C1 (See notes 1 and 2.)
			NPN NC	E2E-X1C2
			PNP NO	E2E-X1B1
			PNP NC	E2E-X1B2
	5.4 dia.	1 mm	NPN NO	E2E-C1C1 (See notes 1 and 2.)
			NPN NC	E2E-C1C2
			PNP NO	E2E-C1B1
			PNP NC	E2E-C1B2
	M8	1.5 mm	NPN NO	E2E-X1R5E1 (See notes 1 and 2.)
			NPN NC	E2E-X1R5E2
			PNP NO	E2E-X1R5F1
			PNP NC	E2E-X1R5F2
	M12	2 mm	NPN NO	E2E-X2E1 (See notes 1, 2, 3, and 4.)
			NPN NC	E2E-X2E2 (See notes 3 and 4.)
			PNP NO	E2E-X2F1
			PNP NC	E2E-X2F2
	M18	5 mm	NPN NO	E2E-X5E1 (See notes 1, 2, 3, and 4.)
			NPN NC	E2E-X5E2 (See notes 3 and 4.)
			PNP NO	E2E-X5F1
			PNP NC	E2E-X5F2
	M30	10 mm	NPN NO	E2E-X10E1 (See notes 1, 2, 3, and 4.)
			NPN NC	E2E-X10E2 (See notes 3 and 4.)
			PNP NO	E2E-X10F1
			PNP NC	E2E-X10F2

Size		Sensing distance	Output configuration	Model
Un-shielded 	M8	2 mm	NPN NO	E2E-X2ME1 (See note 2.)
			NPN NC	E2E-X2ME2
			PNP NO	E2E-X2MF1
			PNP NC	E2E-X2MF2
	M12	5 mm	NPN NO	E2E-X5ME1 (See notes 1, 2, 3, and 4.)
			NPN NC	E2E-X5ME2 (See notes 3 and 4.)
			PNP NO	E2E-X5MF1
			PNP NC	E2E-X5MF2
	M18	10 mm	NPN NO	E2E-X10ME1 (See notes 1, 2, 3, and 4.)
			NPN NC	E2E-X10ME2 (See notes 3 and 4.)
			PNP NO	E2E-X10MF1
			PNP NC	E2E-X10MF2
	M30	18 mm	NPN NO	E2E-X18ME1 (See notes 1, 2, 3, and 4.)
			NPN NC	E2E-X18ME2 (See notes 3 and 4.)
			PNP NO	E2E-X18MF1
			PNP NC	E2E-X18MF2



**Note 1.** Cables with a length of 5 m are also available. Specify the cable length at the end of the model number (e.g., E2E-X2E1 5M).

**2.** Models with a robotics cable are also available. These models are E2E-X□E1-R (e.g., E2E-X5E1-R).

**3.** Models with a different frequency are also available. These models are E2E-X□E□5 (e.g., E2E-X5E15).

**4.** These models have e-CON connectors (0.3 m cable length), which is indicated by the suffix "ECON" (e.g., E2E-X2E1-ECON).






## AC 2-wire/Pre-wired Models

Size		Sensing distance	Operation mode	Model
Shielded 	M8	1.5 mm	NO	E2E-X1R5Y1
			NC	E2E-X1R5Y2
	M12	2 mm	NO	E2E-X2Y1 (See notes 1 and 2.)
			NC	E2E-X2Y2
	M18	5 mm	NO	E2E-X5Y1 (See notes 1 and 2.)
			NC	E2E-X5Y2
	M30	10 mm	NO	E2E-X10Y1 (See notes 1 and 2.)
			NC	E2E-X10Y2
Un-shielded 	M8	2 mm	NO	E2E-X2MY1
			NC	E2E-X2MY2
	M12	5 mm	NO	E2E-X5MY1 (See notes 1 and 2.)
			NC	E2E-X5MY2
	M18	10 mm	NO	E2E-X10MY1 (See note 1.)
			NC	E2E-X10MY2
	M30	18 mm	NO	E2E-X18MY1 (See note 1.)
			NC	E2E-X18MY2



**Note 1.** Models with a different frequency are also available. These models are E2E-X□Y□5 (e.g., E2E-X5Y15).

**2.** Cables with a length of 5 m are also available. Specify the cable length at the end of the model number (e.g., E2E-X2Y1 5M).


## DC 3-wire/Connector Models

Connector	Size		Sensing distance	Output configuration	Model
M12	Shielded 	M8	1.5 mm	NPN NO	E2E-X1R5E1-M1
				NPN NC	E2E-X1R5E2-M1
				PNP NO	E2E-X1R5F1-M1
				PNP NC	E2E-X1R5F2-M1
		M12	2 mm	NPN NO	E2E-X2E1-M1
				NPN NC	E2E-X2E2-M1
				PNP NO	E2E-X2F1-M1
				PNP NC	E2E-X2F2-M1
		M18	5 mm	NPN NO	E2E-X5E1-M1
				NPN NC	E2E-X5E2-M1
				PNP NO	E2E-X5F1-M1
				PNP NC	E2E-X5F2-M1
		M30	10 mm	NPN NO	E2E-X10E1-M1
				NPN NC	E2E-X10E2-M1
				PNP NO	E2E-X10F1-M1
				PNP NC	E2E-X10F2-M1
	Un-shielded 	M8	2 mm	NPN NO	E2E-X2ME1-M1
				NPN NC	E2E-X2ME2-M1
				PNP NO	E2E-X2MF1-M1
				PNP NC	E2E-X2MF2-M1
		M12	5 mm	NPN NO	E2E-X5ME1-M1
				NPN NC	E2E-X5ME2-M1
				PNP NO	E2E-X5MF1-M1
				PNP NC	E2E-X5MF2-M1
		M18	10 mm	NPN NO	E2E-X10ME1-M1
				NPN NC	E2E-X10ME2-M1
				PNP NO	E2E-X10MF1-M1
				PNP NC	E2E-X10MF2-M1
		M30	18 mm	NPN NO	E2E-X18ME1-M1
				NPN NC	E2E-X18ME2-M1
				PNP NO	E2E-X18MF1-M1
				PNP NC	E2E-X18MF2-M1
M8-3 pin	Shielded 	4 dia.	0.8 mm	NPN NO	E2E-CR8C1-M5
				NPN NC	E2E-CR8C2-M5
				PNP NO	E2E-CR8B1-M5
				PNP NC	E2E-CR8B2-M5
		M5	1 mm	NPN NO	E2E-X1C1-M5
				NPN NC	E2E-X1C2-M5
				PNP NO	E2E-X1B1-M5
				PNP NC	E2E-X1B2-M5
M8	Shielded 	M8	1.5 mm	NPN NO	E2E-X1R5E1-M3
				NPN NC	E2E-X1R5E2-M3
				PNP NO	E2E-X1R5F1-M3
				PNP NC	E2E-X1R5F2-M3
	Un-shielded 	M8	2 mm	NPN NO	E2E-X2ME1-M3
				NPN NC	E2E-X2ME2-M3
				PNP NO	E2E-X2MF1-M3
				PNP NC	E2E-X2MF2-M3

## AC 2-wire/Connector Models

Size		Sensing distance	Operation mode	Model
<div>Shielded</div> 	M12	2 mm	NO	E2E-X2Y1-M1
			NC	E2E-X2Y2-M1
	M18	5 mm	NO	E2E-X5Y1-M1
			NC	E2E-X5Y2-M1
	M30	10 mm	NO	E2E-X10Y1-M1
			NC	E2E-X10Y2-M1
<div>Un-shielded</div> 	M12	5 mm	NO	E2E-X5MY1-M1
			NC	E2E-X5MY2-M1
	M18	10 mm	NO	E2E-X10MY1-M1
			NC	E2E-X10MY2-M1
	M30	18 mm	NO	E2E-X18MY1-M1
			NC	E2E-X18MY2-M1

## AC/DC 2-wire/Pre-wired Models



Size		Sensing distance	Operation mode	Model
	M12	3 mm	NO	E2E-X3T1
	M18	7 mm		E2E-X7T1 (See note 2.)
	M30	10 mm		E2E-X10T1

**Note 1.** These models do not conform to CE standards.

**2.** Cables with a length of 5 m are also available as standard models. Specify the cable length at the end of the model number (e.g., E2E-X7T1 5M).



## E2E2

### DC 2-wire/Pre-wired Models



Size	Sensing distance	Operation mode	Model
Shielded 	M12	3 mm	NO (See note.)
		NC	E2E2-X3D1
	M18	7 mm	NO (See note.)
		NC	E2E2-X3D2
	M30	10 mm	NO (See note.)
		NC	E2E2-X7D1
Unshielded 	M12	8 mm	NO (See note.)
		NC	E2E2-X7D2
	M18	14 mm	NO (See note.)
		NC	E2E2-X10D1
	M30	20 mm	NO (See note.)
		NC	E2E2-X10D2

**Note:** In addition to the above models, E2E-X□D15 models (e.g., E2E-X3D15), which are different in frequency from the above models, are available.



### DC 3-wire/Pre-wired Models

Size	Sensing distance	Output configuration	Model
Shielded 	M12	2 mm	NPN NO
			NPN NC
			PNP NO
			PNP NC
	M18	5 mm	NPN NO
			NPN NC
			PNP NO
			PNP NC
	M30	10 mm	NPN NO
			NPN NC
			PNP NO
			PNP NC
Unshielded 	M12	5 mm	NPN NO
			NPN NC
			PNP NO
			PNP NC
	M18	10 mm	NPN NO
			NPN NC
			PNP NO
			PNP NC
	M30	18 mm	NPN NO
			NPN NC
			PNP NO
			PNP NC



## DC 3-wire/Connector Models

Size		Sensing distance	Output configuration	Model
Shielded 	M12	2 mm	NPN NO	E2E2-X2C1-M1
			NPN NC	E2E2-X2C2-M1
			PNP NO	E2E2-X2B1-M1
			PNP NC	E2E2-X2B2-M1
	M18	5 mm	NPN NO	E2E2-X5C1-M1
			NPN NC	E2E2-X5C2-M1
			PNP NO	E2E2-X5B1-M1
			PNP NC	E2E2-X5B2-M1
	M30	10 mm	NPN NO	E2E2-X10C1-M1
			NPN NC	E2E2-X10C2-M1
			PNP NO	E2E2-X10B1-M1
			PNP NC	E2E2-X10B2-M1
Unshielded 	M12	5 mm	NPN NO	E2E2-X5MC1-M1
			NPN NC	E2E2-X5MC2-M1
			PNP NO	E2E2-X5MB1-M1
			PNP NC	E2E2-X5MB2-M1
	M18	10 mm	NPN NO	E2E2-X10MC1-M1
			NPN NC	E2E2-X10MC2-M1
			PNP NO	E2E2-X10MB1-M1
			PNP NC	E2E2-X10MB2-M1
	M30	18 mm	NPN NO	E2E2-X18MC1-M1
			NPN NC	E2E2-X18MC2-M1
			PNP NO	E2E2-X18MB1-M1
			PNP NC	E2E2-X18MB2-M1

## AC 2-wire/Pre-wired Models

Size		Sensing distance	Operation mode	Model
Shielded 	M12	2 mm	NO	E2E2-X2Y1
			NC	E2E2-X2Y2
	M18	5 mm	NO	E2E2-X5Y1
			NC	E2E2-X5Y2
	M30	10 mm	NO	E2E2-X10Y1
			NC	E2E2-X10Y2
Unshielded 	M12	5 mm	NO	E2E2-X5MY1
			NC	E2E2-X5MY2
	M18	10 mm	NO	E2E2-X10MY1
			NC	E2E2-X10MY2
	M30	18 mm	NO	E2E2-X18MY1
			NC	E2E2-X18MY2

# AC 2-wire/Connector Models

Size		Sensing distance	Operation mode	Model
Shielded 	M12	2 mm	NO	E2E2-X2Y1-M4
			NC	E2E2-X2Y2-M4
	M18	5 mm	NO	E2E2-X5Y1-M4
			NC	E2E2-X5Y2-M4
	M30	10 mm	NO	E2E2-X10Y1-M4
			NC	E2E2-X10Y2-M4
Unshielded 	M12	5 mm	NO	E2E2-X5MY1-M4
			NC	E2E2-X5MY2-M4
	M18	10 mm	NO	E2E2-X10MY1-M4
			NC	E2E2-X10MY2-M4
	M30	18 mm	NO	E2E2-X18MY1-M4
			NC	E2E2-X18MY2-M4



# Specifications

## ■ Ratings/Characteristics

### E2E

#### E2E-X□D□ DC 2-wire Models

Size Type  Item		M8		M12		M18		M30	
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
		E2E-X2D□	E2E-X4MD□	E2E-X3D□	E2E-X8MD□	E2E-X7D□	E2E-X14MD□	E2E-X10D□	E2E-X20MD□
Sensing distance		2 mm ±10%	4 mm ±10%	3 mm ±10%	8 mm ±10%	7 mm ±10%	14 mm ±10%	10 mm ±10%	20 mm ±10%
Set distance (See note 1.)		0 to 1.6 mm	0 to 3.2 mm	0 to 2.4 mm	0 to 6.4 mm	0 to 5.6 mm	0 to 11.2 mm	0 to 8.0 mm	0 to 16.0 mm
Differential travel		15% max. of sensing distance		10% max. of sensing distance					
Sensing object		Ferrous metal (The sensing distance decreases with non-ferrous metal, refer to <i>Engineering Data</i> .)							
Standard sensing object		Iron, 8 x 8 x 1 mm	Iron, 20 x 20 x 1 mm	Iron, 12 x 12 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 18 x 18 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 54 x 54 x 1 mm
Response speed (See note 2.)		1.5 kHz	1.0 kHz	1.0 kHz	0.8 kHz	0.5 kHz	0.4 kHz	0.4 kHz	0.1 kHz
Power supply voltage (operating voltage range)		12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.							
Leakage current		0.8 mA max.							
Control output	Load current	3 to 100 mA Diagnostic output: 50 mA for -D1(5)S models							
	Residual voltage (See note 3.)	3 V max. (Load current: 100 mA, Cable length: 2 m. M1J-T models only: 5 V max.)							
Indicator		D1 Models: Operation indicator (red LED), setting indicator (green LED) D2 Models: Operation indicator (red LED)							
Operation mode (with sensing object approaching)		D1 Models: NO D2 Models: NC For details, refer to <i>Timing Charts</i> .							
Diagnostic output delay		0.3 to 1 s							
Protection circuits		Surge suppressor, output load short-circuit protection (for control and diagnostic output)							
Ambient temperature		Operating: -25°C to 70°C, Storage: -40°C to 85°C (with no icing or condensation)							
Ambient humidity		Operating/Storage: 35% to 95% (with no condensation)							
Temperature influence		±15% max. of sensing distance at 23°C in the temperature range of -25°C to 70°C		±10% max. of sensing distance at 23°C in the temperature range of -25°C to 70°C					
Voltage influence		±1% max. of sensing distance in the rated voltage range ±15%							
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case							
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current-carrying parts and case							
Vibration resistance		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions							
Shock resistance		500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions		1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions					
Degree of protection		IEC 60529 IP67 (Pre-wired models, pre-wired connector models: in-house standard for oil resistance (former JEM standard equivalent to IP67g)) (See note 4.)							
Connection method		Pre-wired models (standard length: 2 m), connector models, pre-wired connector models (standard length: 0.3 m)							
Weight (packed state)	Pre-wired models	Approx. 60 g		Approx. 70 g		Approx. 130 g		Approx. 175 g	
	Pre-wired connector models	---		Approx. 40 g		Approx. 70 g		Approx. 110 g	
	Connector models	Approx. 15 g		Approx. 25 g		Approx. 40 g		Approx. 90 g	
Material	Case	Stainless steel (SUS303)		Brass-nickel plated					
	Sensing surface	PBT (polybutylene terephthalate)							
	Clamping nuts	Brass-nickel plated							
	Toothed washer	Iron-zinc plated							
Accessories		Instruction manual							

**Note 1.** Use the E2E within the range in which the setting indicator (green LED) is ON (except D2 models).

**2.** The response speed is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

**3.** The residual voltage of each E2E model with the model number suffix "-M1J-T" is 5 V. When connecting an E2E model with the suffix "-M1J-T" to a device, make sure that the device can withstand the residual voltage.

**4.** This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.

## E2E-X□E□/F□ DC 3-wire Models

Item		Size Type	M8		M12		M18		M30	
			Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
			E2E-X1R5E□/ F□	E2E-X2ME□/ F□	E2E-X2E□/ F□	E2E-X5ME□/ F□	E2E-X5E□/ F□	E2E-X10ME□/ F□	E2E-X10E□/ F□	E2E-X18ME□/ F□
Sensing distance			1.5 mm ±10%	2 mm ±10%	2 mm ±10%	5 mm ±10%	5 mm ±10%	10 mm ±10%	10 mm ±10%	18 mm ±10%
Set distance			0 to 1.2 mm	0 to 1.6 mm	0 to 1.6 mm	0 to 4.0 mm	0 to 4.0 mm	0 to 8.0 mm	0 to 8.0 mm	0 to 14.0 mm
Differential travel			10% max. of sensing distance							
Sensing object			Ferrous metal (The sensing distance decreases with non-ferrous metal, refer to <i>Engineering Data</i> .)							
Standard sensing object			Iron, 8 x 8 x 1 mm	Iron, 12 x 12 x 1 mm	Iron, 12 x 12 x 1 mm	Iron, 15 x 15 x 1 mm	Iron, 18 x 18 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 54 x 54 x 1 mm
Response speed (See note 1.)			2.0 kHz	0.8 kHz	1.5 kHz	0.4 kHz	0.6 kHz	0.2 kHz	0.4 kHz	0.1 kHz
Power supply voltage (operating voltage range) (See note 2.)			12 to 24 VDC (10 to 40 VDC), ripple (p-p): 10% max.							
Current consumption			13 mA max.							
Control output	Load current (See note 2.)	200 mA max.								
	Residual voltage	2 V max. (Load current: 200 mA, Cable length: 2 m)								
Indicator			Operation indicator (red LED)							
Operation mode (with sensing object approaching)			E1 F1 Models: NO E2 F2 Models: NC For details, refer to <i>Timing Charts</i> .							
Protection circuits			Power supply reverse polarity protection, surge suppressor, output load short-circuit protection							
Ambient temperature (See note 2)			Operating/Storage: −40°C to 85°C (with no icing or condensation)							
Ambient humidity			Operating/Storage: 35% to 95% (with no icing)							
Temperature influence			±15% max. of sensing distance at 23°C in the temperature range of −40°C to 85°C ±10% max. of sensing distance at 23°C in the temperature range of −25°C to 70°C							
Voltage influence			±1% max. of sensing distance in the rated voltage range ±15%							
Insulation resistance			50 MΩ min. (at 500 VDC) between current-carrying parts and case							
Dielectric strength			1,000 VAC at 50/60 Hz for 1 min between current-carrying parts and case							
Vibration resistance			10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions							
Shock resistance			500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions		1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions					
Degree of protection			IEC 60529 IP67 (Pre-wired models: in-house standard for oil resistance (former JEM standard equivalent to IP67g)) (See note 3.)							
Connection method			Pre-wired models (standard length 2 m), connector models							
Weight (packed state)	Pre-wired models	Approx. 65 g			Approx. 75 g		Approx. 150 g		Approx. 195 g	
	Connector models	Approx. 15 g			Approx. 25 g		Approx. 40 g		Approx. 90 g	
Material	Case	Stainless steel (SUS303)			Brass-nickel plated					
	Sensing surface	PBT (polybutylene terephthalate)								
	Clamping nuts	Brass-nickel plated								
	Toothed washer	Iron-zinc plated								
Accessories			Instruction manual							

**Note 1.** The response speed is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

**2.** When using an E2E with an M8 connector at an ambient temperature range between 70°C and 85°C, supply 10 to 30 VDC to the E2E and make sure that the E2E has a control output of 100 mA maximum.

**3.** This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.

## E2E-C□C□/B□, E2E-X1C□/B□ DC 3-wire Models

Item		Size Type	3 dia.	4 dia.	M5	5.4 dia.
			Shielded			
			E2E-CR6C□/B□	E2E-CR8C□/B□	E2E-X1C□/B□	E2E-C1C□/B□
Sensing distance		0.6 mm ±15%		0.8 mm ±15%		1 mm ±15%
Set distance		0 to 0.4 mm		0 to 0.5 mm		0 to 0.7 mm
Differential travel		15% max. of sensing distance				
Sensing object		Ferrous metal (The sensing distance decreases with non-ferrous metal, refer to <i>Engineering Data</i> .)				
Standard sensing object		Iron: 3 x 3 x 1 mm		Iron: 5 x 5 x 1 mm		
Response speed (See note.)		2 kHz		3 kHz		
Power supply voltage (operating voltage range)		12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.				
Current consumption		10 mA max.		17 mA max.		
Control output	Load current	Open-collector output 80 mA max. (at 30 VDC max.)		Open-collector output 100 mA max. (at 30 VDC max.)		
	Residual voltage	1 V max. (Load current: 80 mA, Cable length: 2 m)		2 V max. (Load current: 100 mA, Cable length: 2 m)		
Indicator		Operation indicator (red LED)				
Operation mode (with sensing object approaching)		C1/-B1 Models:NO C2/-B2 Models:NC For details, refer to <i>Timing Charts</i> .				
Protection circuits		Power supply reverse polarity protection, surge suppressor				
Ambient temperature		Operating/Storage: -25°C to 70°C (with no icing or condensation)				
Ambient humidity		Operating/Storage: 35% to 95%				
Temperature influence		±15% max. of sensing distance at 23°C in the temperature range of -25°C to 70°C				
Voltage influence		±5% max. of sensing distance in the rated voltage range ±10%		±2.5% max. of sensing distance in the rated voltage range ±15%		
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case				
Dielectric strength		500 VAC at 50/60 Hz for 1 min between current-carrying parts and case				
Vibration resistance		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions				
Shock resistance		500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions				
Degree of protection		IEC 60529 IP66		IEC 60529 IP67 (Pre-wired models: in-house standard for oil resistance (former JEM standard equivalent to IP67g)) (See note 2.)		
Connection method		Pre-wired models (Standard length 2 m)		Pre-wired models (Standard length 2 m), connector models		
Weight (packed state)	Pre-wired models	Approx. 60 g				
	Connector models	---		Approx. 12 g	Approx. 15 g	---
Material	Case	Stainless steel (SUS303)			Brass-nickel plated	
	Sensing surface	Heat-resistant ABS				
	Clamping nuts	---			Brass-nickel plated	
	Toothed washer	---			Iron-zinc plated	
Accessories		Instruction manual				

**Note 1.** The response speed is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

**2.** This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.

## E2E-X□Y□ AC 2-wire Models

Size Type  Item		M8		M12		M18		M30	
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
		E2E-X1R5Y□	E2E-X2MY□	E2E-X2Y□	E2E-X5MY□	E2E-X5Y□	E2E-X10MY□	E2E-X10Y□	E2E-X18MY□
Sensing distance		1.5 mm ±10%	2 mm ±10%	2 mm ±10%	5 mm ±10%	5 mm ±10%	10 mm ±10%	10 mm ±10%	18 mm ±10%
Set distance		0 to 1.2 mm	0 to 1.6 mm	0 to 1.6 mm	0 to 4.0 mm	0 to 4.0 mm	0 to 8.0 mm	0 to 8.0 mm	0 to 14.0 mm
Differential travel		10% max. of sensing distance							
Sensing object		Ferrous metal (The sensing distance decreases with non-ferrous metal, refer to <i>Engineering Data</i> .)							
Standard sensing object		Iron, 8 x 8 x 1 mm	Iron, 12 x 12 x 1 mm	Iron, 12 x 12 x 1 mm	Iron, 15 x 15 x 1 mm	Iron, 18 x 18 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 54 x 54 x 1 mm
Response speed		25 Hz							
Power supply voltage (operating voltage range) (See note 1.)		24 to 240 VAC, 50/60 Hz (20 to 264 VAC)							
Leakage current		1.7 mA max.							
Control output	Load current (See note 2.)	5 to 100 mA		5 to 200 mA		5 to 300 mA			
	Residual voltage	Refer to <i>Engineering Data</i> .							
Indicator		Operation indicator (red LED)							
Operation mode (with sensing object approaching)		Y1 Models: NO Y2 Models: NC For details, refer to <i>Timing Charts</i> .							
Protection circuit		Surge suppressor							
Ambient temperature (See notes 1 and 2.)		Operating/Storage: -25°C to 70°C (with no icing or condensation)		Operating/Storage: -40°C to 85°C (with no icing or condensation)					
Ambient humidity		Operating/Storage: 35% to 95% (with no condensation)							
Temperature influence		±10% max. of sensing distance at 23°C in the temperature range of -25°C to 70°C		±15% max. of sensing distance at 23°C in the temperature range of -40°C to 85°C ±10% max. of sensing distance at 23°C in the temperature range of -25°C to 70°C					
Voltage influence		±1% max. of sensing distance in the rated voltage range ±15%							
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case							
Dielectric strength		4,000 VAC at 50/60 Hz for 1 min between current-carrying parts and case (2,000 VAC for M8 Models)							
Vibration resistance		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions							
Shock resistance		500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions		1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions					
Degree of protection		IEC 60529 IP67 (Pre-wired models: in-house standard for oil resistance (former JEM standard equivalent to IP67g)) (See note 3.)							
Connection method		Pre-wired models (standard length 2 m), connector models							
Weight (packed state)	Pre-wired models	Approx. 60 g		Approx. 70 g		Approx. 130 g		Approx. 175 g	
	Connector models	Approx. 15 g		Approx. 25 g		Approx. 40 g		Approx. 90 g	
Material	Case	Stainless steel (SUS303)		Brass-nickel plated					
	Sensing surface	PBT (polybutylene terephthalate)							
	Clamping nuts	Brass-nickel plated							
	Toothed washer	Iron-zinc plated							
Accessories		Instruction manual							

**Note 1.** When supplying 24 VAC to any of the above models, make sure that the operating ambient temperature range is over -25°C.

**2.** When using an M18- or M30-sized E2E within an ambient temperature of 70°C to 85°C, make sure that the E2E has a control output of 5 to 200 mA max.

**3.** This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.

## AC/DC 2-wire Models

Item		Size	M12	M18	M30
		Type	Shielded		
			E2E-X3T1	E2E-X7T1	E2E-X10T1
Sensing distance			3 mm $\pm 10\%$	7 mm $\pm 10\%$	10 mm $\pm 10\%$
Set distance			0 to 2.4 mm	0 to 5.6 mm	0 to 8.0 mm
Differential travel			10% max. of sensing distance		
Sensing object			Ferrous metal (The sensing distance decreases with non-ferrous metal, refer to <i>Engineering Data</i> .)		
Standard sensing object			Iron, 12 x 12 x 1 mm	Iron, 18 x 18 x 1 mm	Iron, 30 x 30 x 1 mm
Response speed (See note 1.)	DC		1.0 kHz	0.5 kHz	0.4 kHz
	AC		25 Hz		
Power supply voltage (operating voltage range) (See note 2.)			24 to 240 VDC (20 to 264 VDC)/48 to 240 VAC (40 to 264 VAC)		
Leakage current			1 mA DC max., 2 mA AC max.		
Control output	Load current		5 to 100 mA		
	Residual voltage		6.0 VDC max. (Load current: 100 mA, Cable length: 2 m) 10 VAC max. (Load current: 5 mA, Cable length: 2 m)		
Indicator			Operation indicator (red LED), setting indicator (green LED)		
Operation mode (with sensing object approaching)			NO For details, refer to <i>Timing Charts</i> .		
Protection circuits			Output load short-circuit protection (at 20 to 40 VDC), Surge suppressor		
Ambient temperature			Operating: $-25^{\circ}\text{C}$ to $70^{\circ}\text{C}$ , Storage: $-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ (with no icing or condensation)		
Ambient humidity			Operating/Storage: 35% to 95% (with no condensation)		
Temperature influence			$\pm 10\%$ max. of sensing distance at $23^{\circ}\text{C}$ in the temperature range of $-25^{\circ}\text{C}$ to $70^{\circ}\text{C}$		
Voltage influence			$\pm 1\%$ max. of sensing distance in the rated voltage range $\pm 15\%$		
Insulation resistance			50 M $\Omega$ min. (at 500 VDC) between current-carrying parts and case		
Dielectric strength			4,000 VAC at 50/60 Hz for 1 min between current-carrying parts and case		
Vibration resistance			10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions		
Shock resistance			1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions		
Degree of protection			IEC 60529 IP67 In-house standard for oil resistance (former JEM standard equivalent to IP67g) (See note 3.)		
Connection method			Pre-wired Models (standard length 2 m)		
Weight (packed state)			Approx. 80 g	Approx. 140 g	Approx. 190 g
Material	Case		Brass-nickel plated		
	Sensing surface		PBT (polybutylene terephthalate)		
	Clamping nuts		Brass-nickel plated		
	Toothed washer		Iron-zinc plated		
Accessories			Instruction manual		

**Note 1.** The response speed is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

**2.** Power supply voltage waveform: Use a sine wave for the power supply. Using a rectangular AC power supply may result in faulty reset.

**3.** This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.

## E2E2

## E2E2-X□D□ DC 2-wire Models

Size Type  Item		M12		M18		M30	
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
		E2E2-X3D□	E2E2-X8MD□	E2E2-X7D□	E2E2-X14MD□	E2E2-X10D□	E2E2-X20MD□
Sensing distance		3 mm ±10%	8 mm ±10%	7 mm ±10%	14 mm ±10%	10 mm ±10%	20 mm ±10%
Set distance (See note 1.)		0 to 2.4 mm	0 to 6.4 mm	0 to 5.6 mm	0 to 11.2 mm	0 to 8.0 mm	0 to 16.0 mm
Differential travel		10% max. of sensing distance					
Sensing object		Ferrous metal (The sensing distance decreases with non-ferrous metal, refer to <i>Engineering Data</i> .)					
Standard sensing object		Iron, 12 x 12 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 18 x 18 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 54 x 54 x 1 mm
Response speed (See note 2.)		1.0 kHz	0.8 kHz	0.5 kHz	0.4 kHz	0.4 kHz	0.1 kHz
Power supply voltage (operating voltage range)		12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.					
Leakage current		0.8 mA max.					
Control output	Load current	3 to 100 mA					
	Residual voltage	3.0 V max. (Load current: 100 mA, Cable length: 2 m)					
Indicator		D1 Models: Operation indicator (red LED), setting indicator (green LED) D2 Models: Operation indicator (red LED)					
Operation mode (with sensing object approaching)		D1 Models: NO D2 Models: NC For details, refer to <i>Timing charts</i> .					
Protection circuits		Surge suppressor, output load short-circuit protection					
Ambient temperature		Operating/Storage: –25°C to 70°C (with no icing or condensation)					
Ambient humidity		Operating/Storage: 35% to 95% (with no condensation)					
Temperature influence		±10% max. of sensing distance at 23°C in the temperature range of –25°C to 70°C					
Voltage influence		±1% max. of sensing distance in the rated voltage range ±15%					
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case					
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current-carrying parts and case					
Vibration resistance		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions					
Shock resistance		1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions					
Degree of protection		IEC 60529 IP67 In-house standard for oil resistance (former JEM standard equivalent to IP67g) (See note 3.)					
Connection method		Pre-wired models (standard length 2 m)					
Weight (packed state)		Approx. 65 g		Approx. 150 g		Approx. 210 g	
Material	Case	Brass					
	Sensing surface	PBT (polybutylene terephthalate)					
	Clamping nuts	Brass-nickel plated					
	Toothed washer	Iron-zinc plated					
Accessories		Instruction manual					

**Note 1.** Use the E2E2 within the range in which the setting indicator (green LED) is lit (except D2 models).

**2.** The response speed is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

**3.** This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.

# E2E2-X□C□/B□ DC 3-wire Models

Size Type  Item		M12		M18		M30	
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
		E2E2-X2C□/ B□	E2E2-X5MC□/B□	E2E2-X5C□/ B□	E2E2-X10MC□/ B□	E2E2-X10C□/ B□	E2E2-X18MC□/ B□
Sensing distance		2 mm ±10%	5 mm ±10%	5 mm ±10%	10 mm ±10%	10 mm ±10%	18 mm ±10%
Set distance		0 to 1.6 mm	0 to 4.0 mm	0 to 4.0 mm	0 to 8.0 mm	0 to 8.0 mm	0 to 14.0 mm
Differential travel		10% max. of sensing distance					
Sensing object		Ferrous metal (The sensing distance decreases with non-ferrous metal, refer to <i>Engineering Data</i> .)					
Standard sensing object		Iron, 12 x 12 x 1 mm	Iron, 15 x 15 x 1 mm	Iron, 18 x 18 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 54 x 54 x 1 mm
Response speed (See note 1.)		1.5 kHz	0.4 kHz	0.6 kHz	0.2 kHz	0.4 kHz	0.1 kHz
Power supply voltage (operating voltage range) (See note.)		12 to 24 VDC (10 to 55 VDC), ripple (p-p): 10% max.					
Current consumption		13 mA max.					
Control output	Load current	200 mA max., open collector (55 VDC max.)					
	Residual voltage	2 V max. (Load current: 200 mA, Cable length: 2 m)					
Indicator		Operation indicator (red LED)					
Operation mode (with sensing object approaching)		B1/C1 Models: NO B2/C2 Models: NC For details, refer to <i>Timing Charts</i> .					
Protection circuits		Surge suppressor, output load short-circuit protection, power supply reverse polarity protection					
Ambient temperature		Operating/Storage: −40°C to 85°C (with no icing or condensation)					
Ambient humidity		Operating/Storage: 35% to 95% (with no condensation)					
Temperature influence		±15% max. of sensing distance at 23°C in the temperature range of −40°C to 85°C ±10% max. of sensing distance at 23°C in the temperature range of −25°C to 70°C					
Voltage influence		±1% max. of sensing distance in the rated voltage range ±15%					
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case					
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current-carrying parts and case					
Vibration resistance		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions					
Shock resistance		1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions					
Degree of protection		IEC 60529 IP67 In-house standard for oil resistance (former JEM standard equivalent to IP67g) (See note 3.)					
Connection method		Pre-wired models (standard length: 2 m)					
Weight (packed state)		Approx. 75 g		Approx. 160 g		Approx. 220 g	
Material	Case	Brass					
	Sensing surface	PBT (polybutylene terephthalate)					
	Clamping nuts	Brass-nickel plated					
	Toothed washer	Iron-zinc plated					
Accessories		Instruction manual					

**Note 1.** The response speed is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

**2.** An unsmoothed full-wave rectification power supply of 24 VDC ±20% (average value) can be used.

**3.** This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.

## E2E2-X□Y□ AC 2-wire Models

Item		Size Type	M12		M18		M30	
			Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
			E2E2-X2Y□	E2E2-X5MY□	E2E2-X5Y□	E2E2-X10MY□	E2E2-X10Y□	E2E2-X18MY□
Sensing distance			2 mm ±10%	5 mm ±10%	5 mm ±10%	10 mm ±10%	10 mm ±10%	18 mm ±10%
Set distance			0 to 1.6 mm	0 to 4.0 mm	0 to 4.0 mm	0 to 8.0 mm	0 to 8.0 mm	0 to 14.0 mm
Differential travel			10% max. of sensing distance					
Sensing object			Ferrous metal (The sensing distance decreases with non-ferrous metal, refer to <i>Engineering Data</i> .)					
Standard sensing object			Iron, 12 x 12 x 1 mm	Iron, 15 x 15 x 1 mm	Iron, 18 x 18 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 30 x 30 x 1 mm	Iron, 54 x 54 x 1 mm
Response speed			25 Hz					
Power supply voltage (operating voltage range) (See note 1.)			24 to 240 VAC, 50/60 Hz (20 to 264 VAC)					
Leakage current			1.7 mA max.					
Control output	Load current (See note 2.)	5 to 200 mA			5 to 300 mA			
	Residual voltage	Refer to <i>Engineering Data</i> .						
Indicator			Operation indicator (red LED)					
Operation mode (with sensing object approaching)			Y1 Models: NO Y2 Models: NC For details, refer to <i>Timing Charts</i> .					
Ambient temperature			Operating/Storage: -40°C to 85°C (with no icing or condensation) (See notes 1 and 2.)					
Ambient humidity			Operating/Storage: 35% to 95% (with no condensation)					
Temperature influence			±15% max. of sensing distance at 23°C in the temperature range of -40°C to 85°C ±10% max. of sensing distance at 23°C in the temperature range of -25°C to 70°C					
Voltage influence			±1% max. of sensing distance in the rated voltage range ±15%					
Insulation resistance			50 MΩ min. (at 500 VDC) between current-carrying parts and case					
Dielectric strength			4,000 VAC at 50/60 Hz for 1 min between current-carrying parts and case					
Vibration resistance			10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions					
Shock resistance			1,000 m/s <sup>2</sup> , 10 times each in X, Y, and Z directions					
Degree of protection			IEC 60529 IP67 In-house standard for oil resistance (former JEM standard equivalent to IP67g) (See note 3.)					
Connection method			Pre-wired models (standard length: 2 m)					
Weight (packed state)			Approx. 65 g			Approx. 150 g		Approx. 210 g
Material	Case	Brass						
	Sensing surface	PBT (polybutylene terephthalate)						
	Clamping nuts	Brass-nickel plated						
	Toothed washer	Iron-zinc plated						
Accessories			Instruction manual					

**Note 1.** When supplying 24 VAC to any of the above models, make sure that the operating ambient temperature range is -25°C to 85°C.

**2.** When using an M18- or M30-sized E2E2 within an ambient temperature of 70°C to 85°C, make sure that the E2E2 has a control output of 5 to 200 mA maximum.

**3.** This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.




# Engineering Data

## E2E


### Operating Range (Typical)

#### Shielded Models


E2E-X□D□  
E2E-X□T1

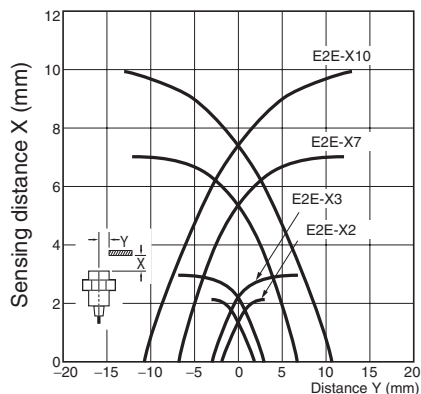

E2E-X□E□/F□  
E2E-X□Y□

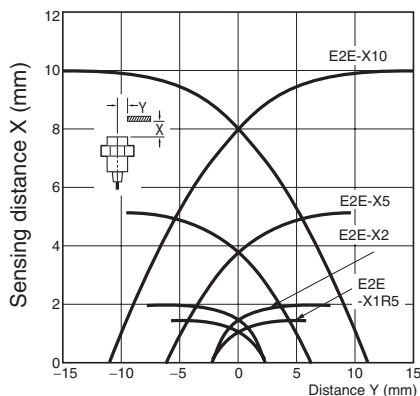


E2E-C□C□/B□  
E2E-X□C□/B□

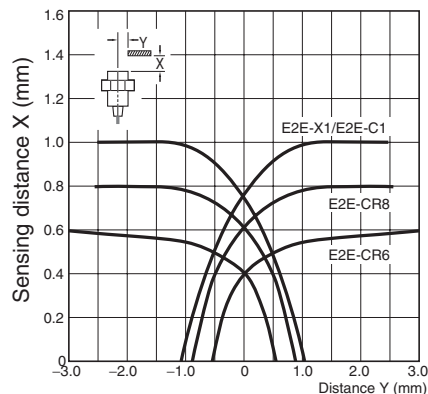


#### Unshielded Models

E2E-X□MD□

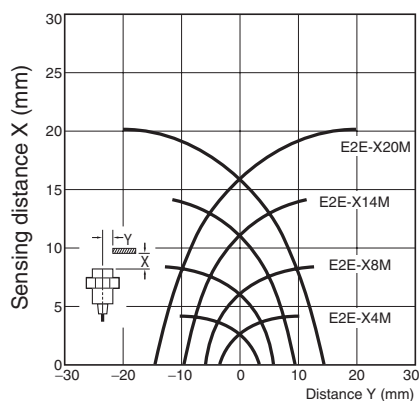


E2E-X□ME□/F□  
E2E-X□MY□

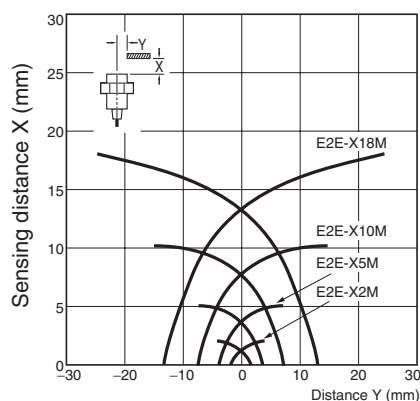


# Leakage Current (Typical)


E2E-X□D□

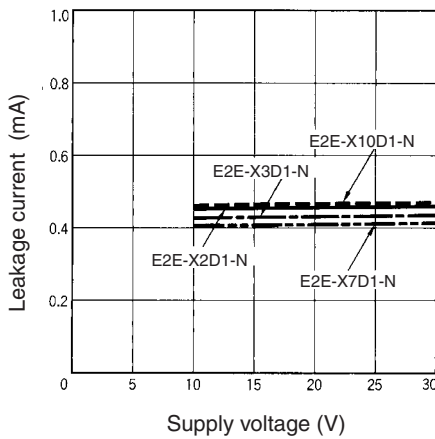

E2E-X□Y□

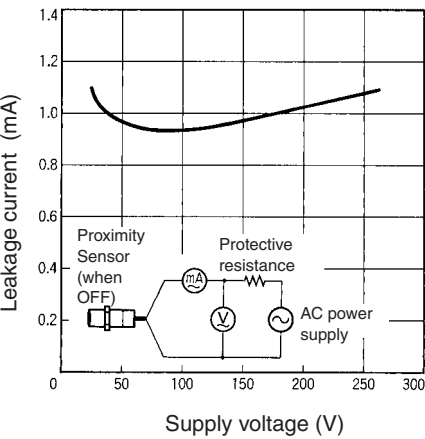


E2E-X□T1  
DC/AC

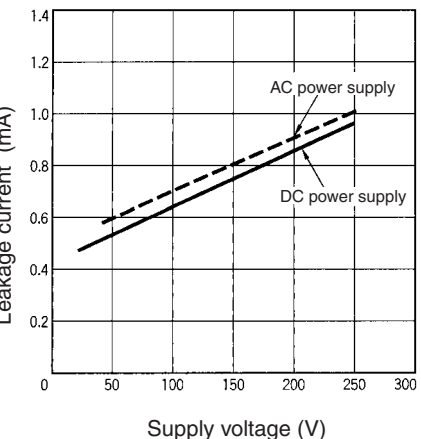


# Residual Output Voltage (Typical)

E2E-X□D□

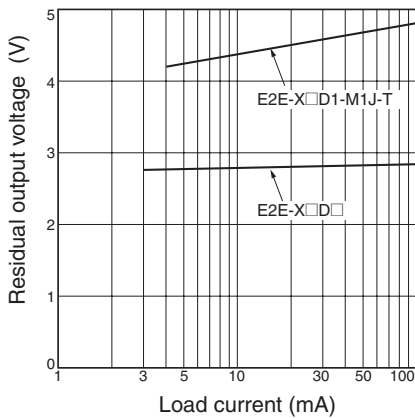


E2E-X□T1

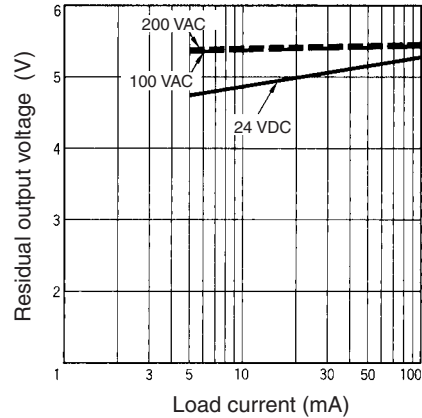


E2E-X□Y□


24 VAC

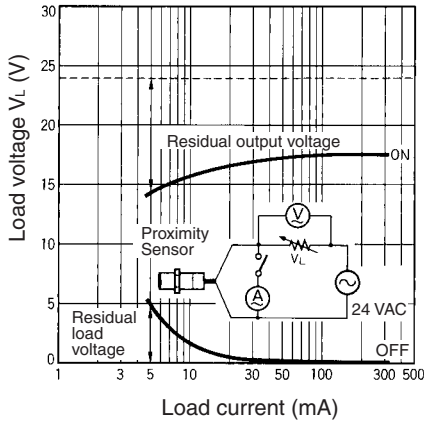

100 VAC

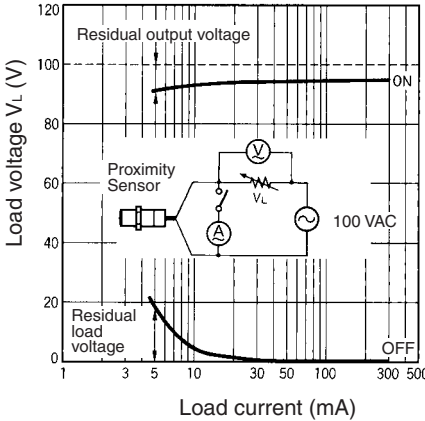


200 VAC

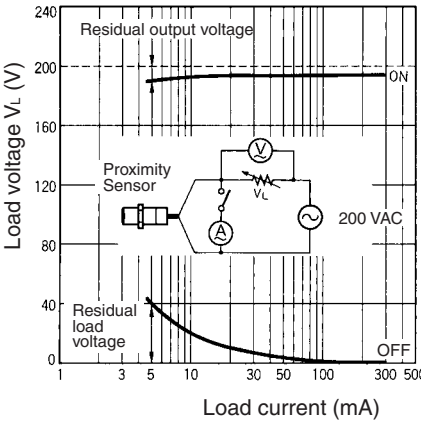


# Sensing Distance vs. Sensing Object (Typical)


E2E-X2D□

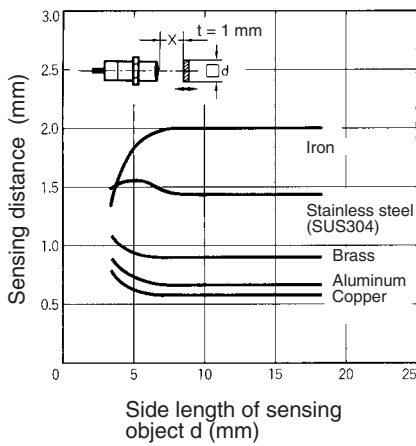


E2E-X3D□  
E2E-X3T1

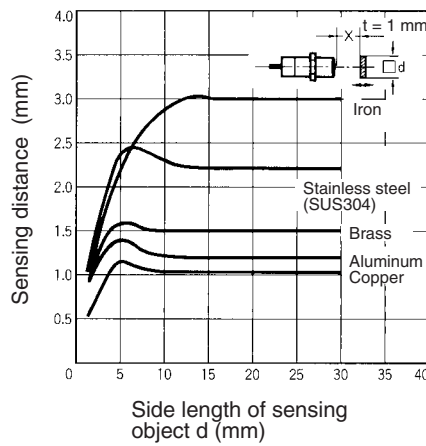


E2E-X7D□  
E2E-X7T1

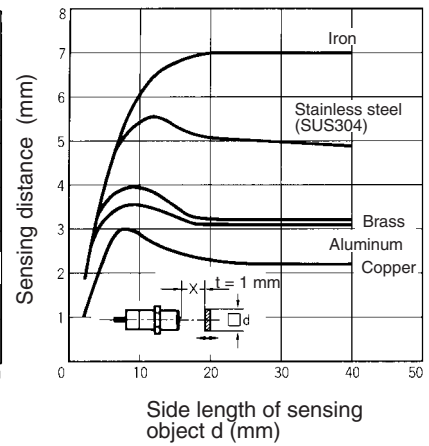


E2E-X10D□  
E2E-X10T1

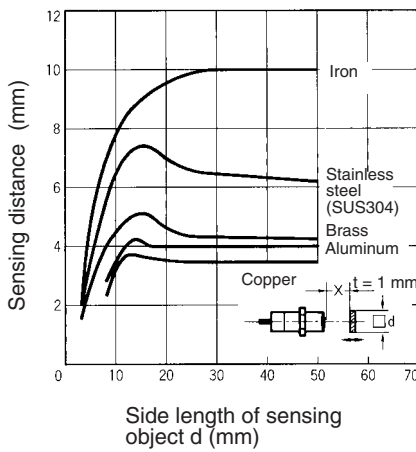


E2E-X4MD□

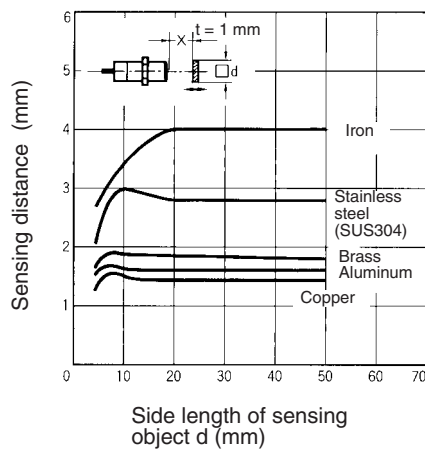


E2E-X8MD□

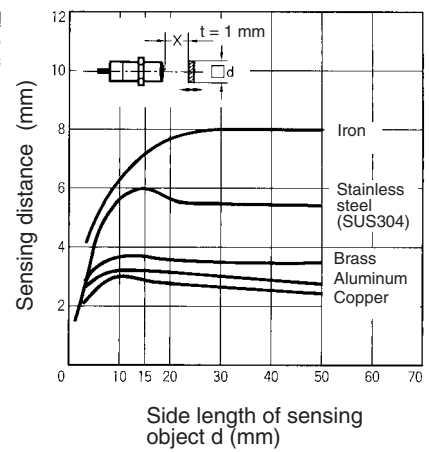


E2E-X14MD□

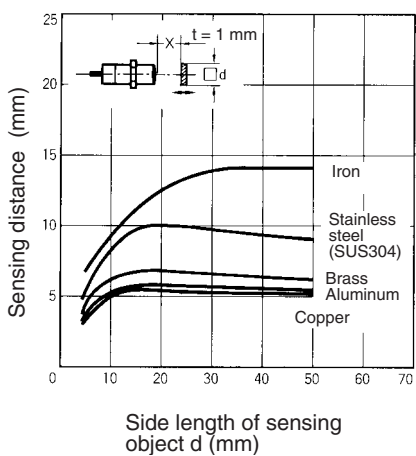


E2E-X20MD□

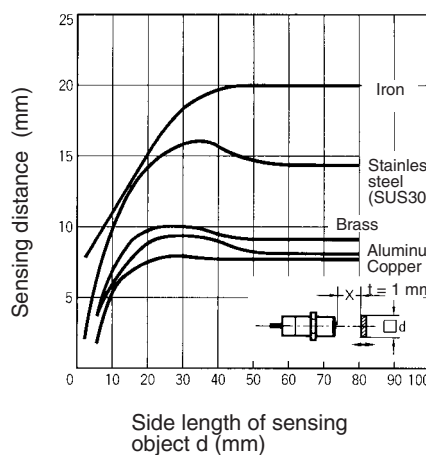


E2E-X1R5E□/F□  
E2E-X1R5Y□

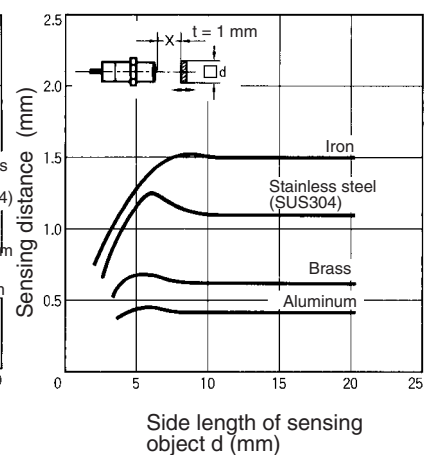


**E2E-X2E□/F□**  
**E2E-X2Y□**

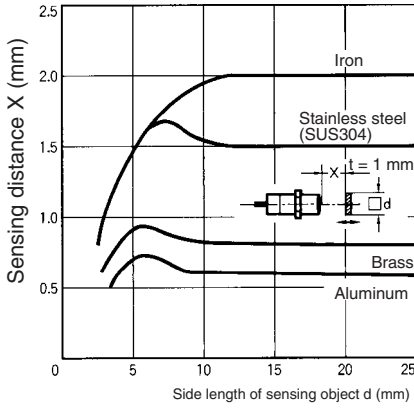


**E2E-X5E□/F□**  
**E2E-X5Y□**

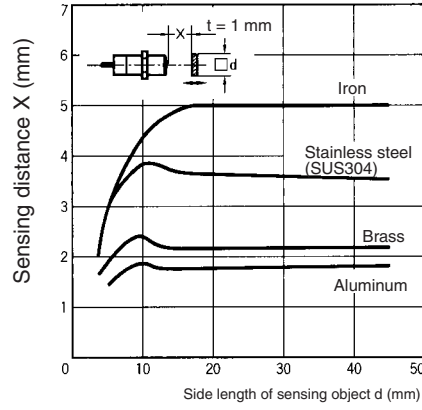


**E2E-X10E□/F□**  
**E2E-X10Y□**

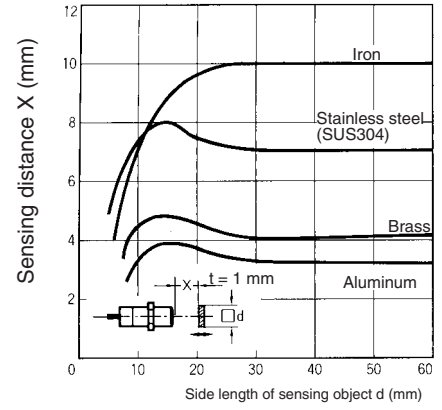


**E2E-X2ME□/F□**  
**E2E-X2MY□**

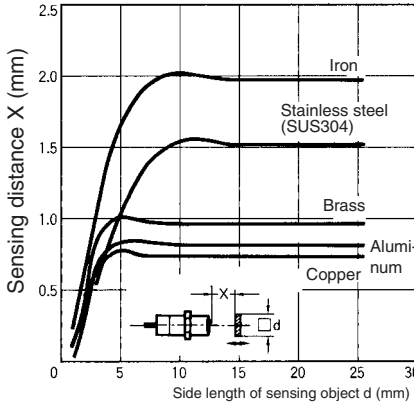


**E2E-X5ME□/F□**  
**E2E-X5MY□**

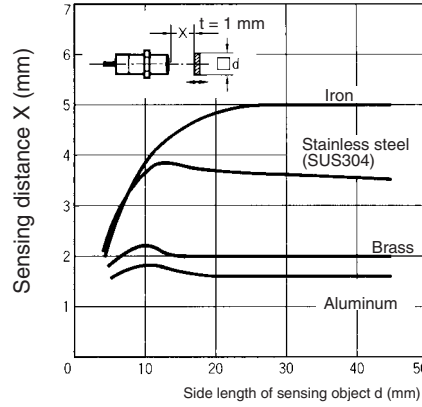


**E2E-X10ME□/F□**  
**E2E-X10MY□**

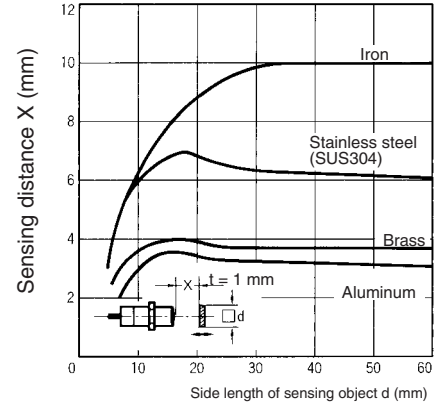


**E2E-X18ME□/F□**  
**E2E-X18MY□**

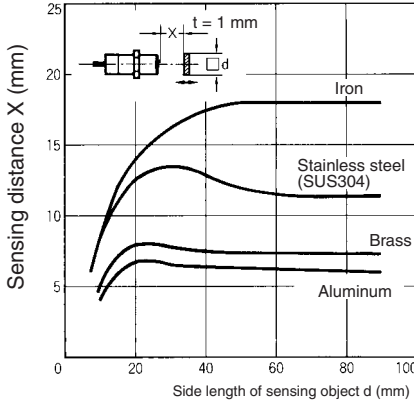


**E2E-CR6□□**

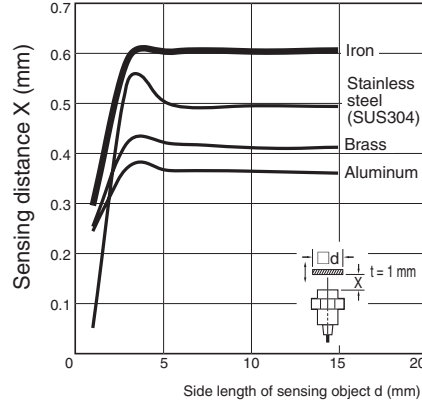

**E2E-CR8□□**

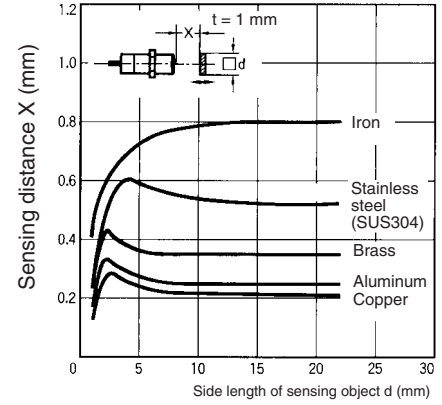

**E2E-X1□□**  
**E2E-C1□□**

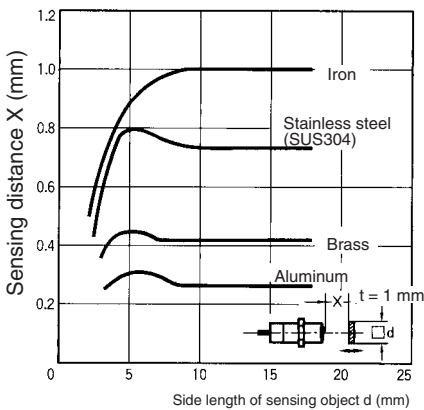


## E2E2



### Operating Range (Typical)

#### Shielded Models

E2E2-X□D□

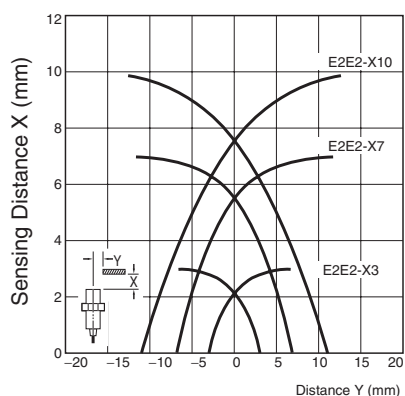


E2E2-X□C□/B□  
E2E2-X□Y□

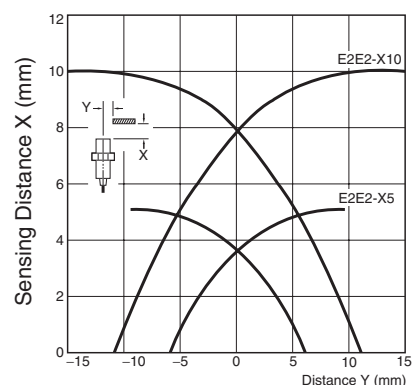
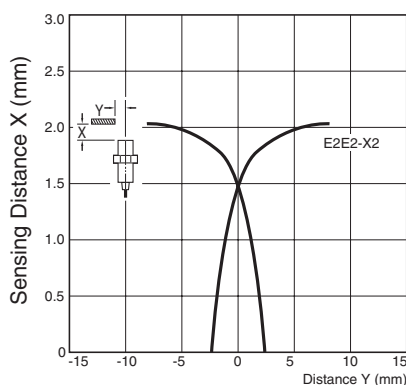


#### Unshielded Models

E2E2-X□MD□

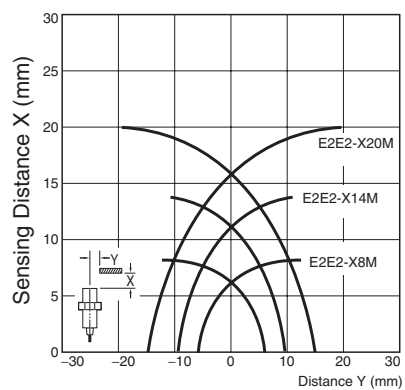


E2E2-X□MC□/B□  
E2E2-X□MY□

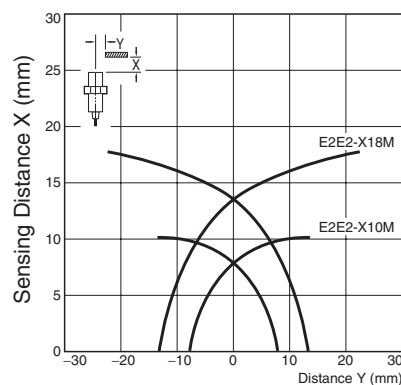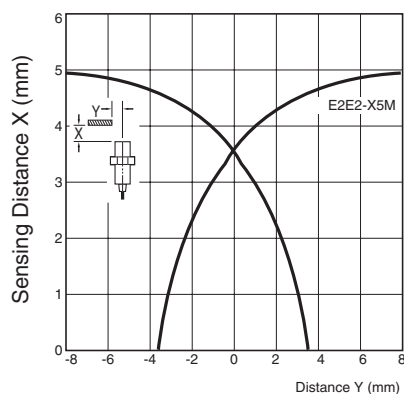


### Leakage Current (Typical)

E2E2-X□D□

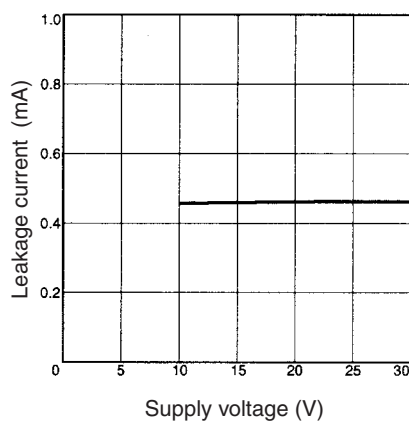


E2E2-X□Y□

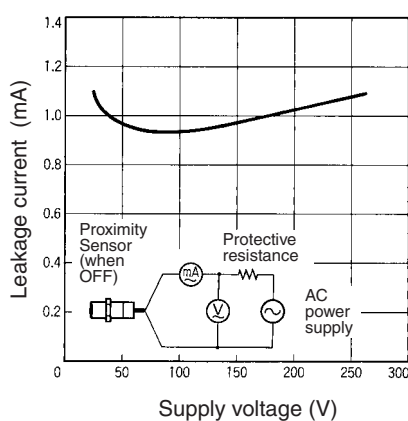


# Residual Output Voltage (Typical)

E2E2-X□D□

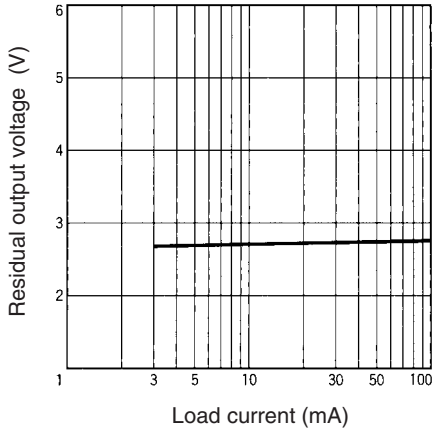


E2E2-X□Y□


24 VAC

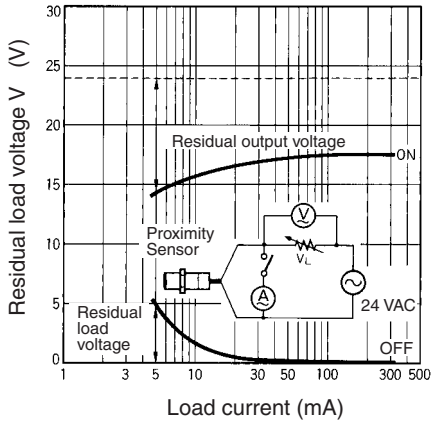

100 VAC

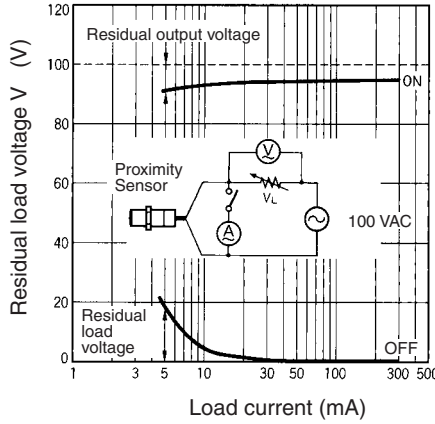


200 VAC

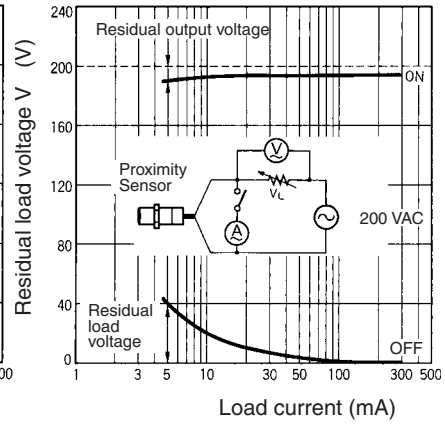


# Sensing Distance vs. Sensing Object (Typical)


E2E2-X3D□

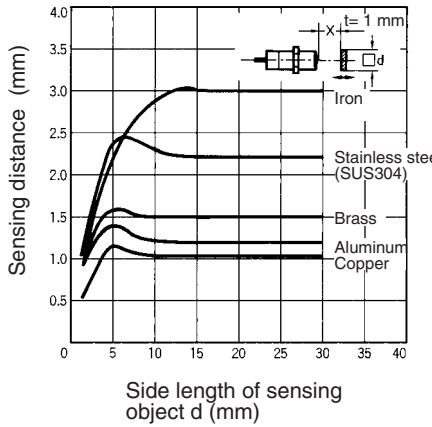


E2E2-X7D□

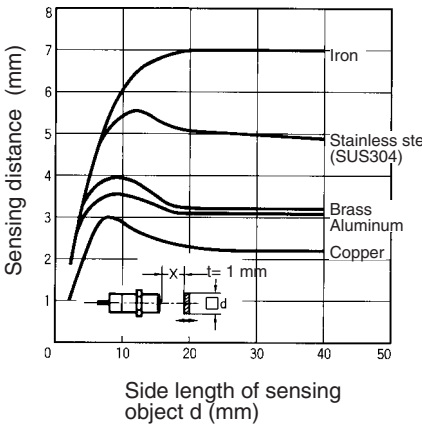


E2E2-X10D□

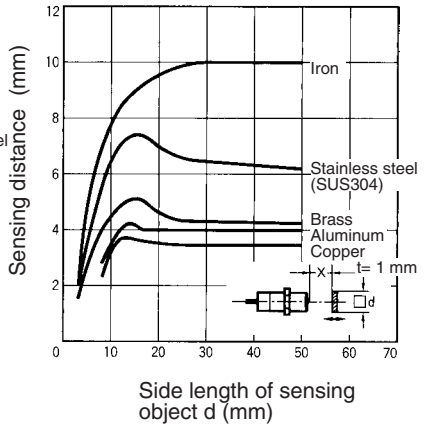


**E2E2-X8MD**

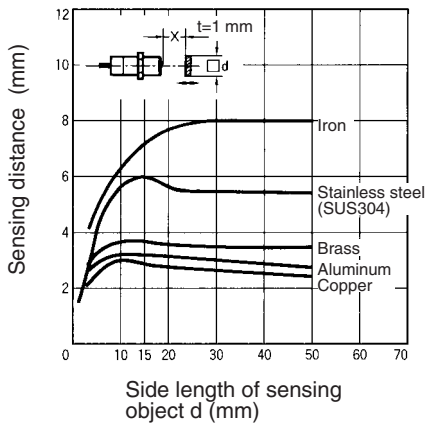


**E2E2-X14MD**

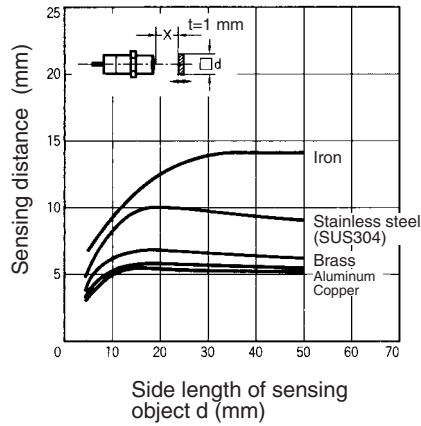


**E2E2-X20MD**

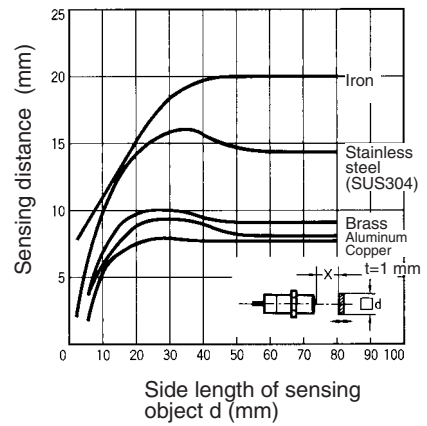


**E2E2-X2C/B**  
**E2E2-X2Y**

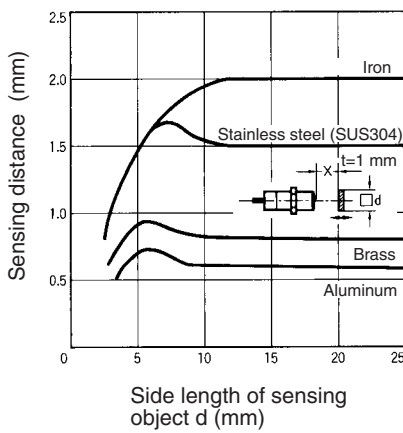


**E2E2-X5C/B**  
**E2E2-X5Y**

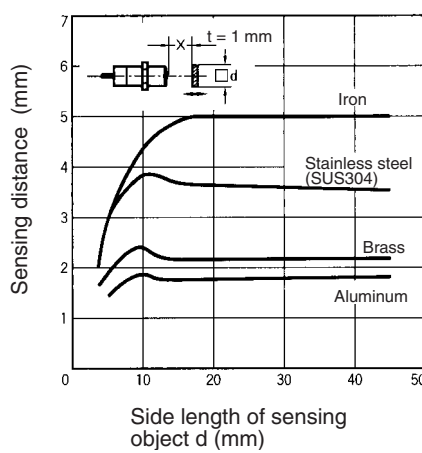


**E2E2-X10C/B**  
**E2E2-X10Y**

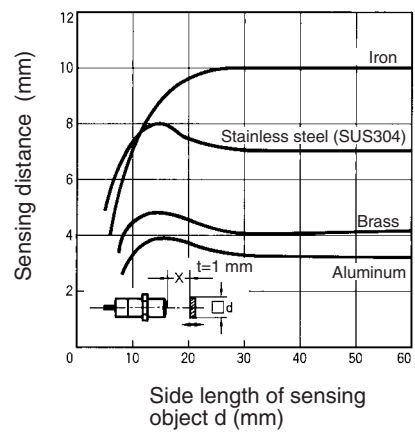


**E2E2-X5MC/B**  
**E2E2-X5MY**

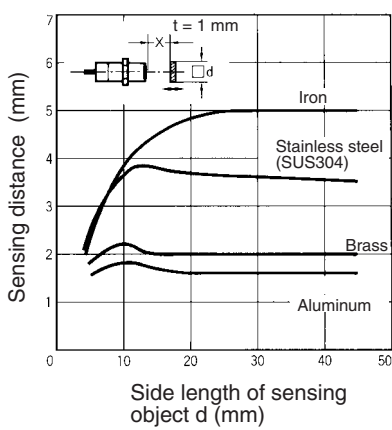

**E2E2-X10MC/B**  
**E2E2-X10MY**

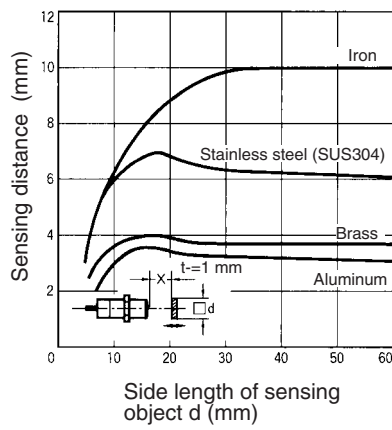

**E2E2-X18MC/B**  
**E2E2-X18MY**

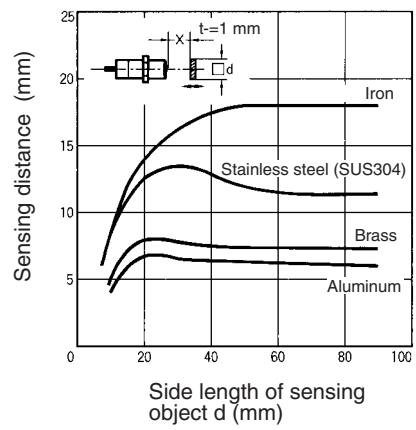


# Output Circuits and Timing Charts

## Output Circuits

### E2E


#### E2E-X□D□ DC 2-wire Models

##### E2E-X□D1 Without Diagnostic Output

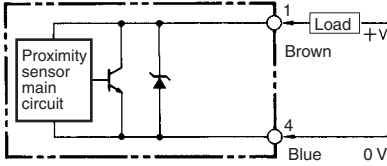


- Note:** 1. The load can be connected to either the +V or 0 V side.  
2. The pin numbers in the above diagram are for the -M□G(J). For the -M1, pin 4 is +V and pin 3 is 0 V.

##### E2E-X□D1-M1J-T No Polarity

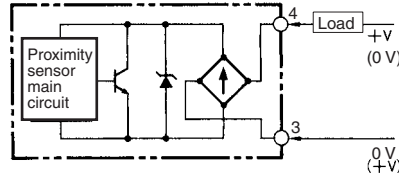


- Note:** 1. The load can be connected to either the +V or 0 V side.  
2. The E2E-X□D1-M1J-T has no polarity. Therefore, terminals 3 and 4 have no polarity.

##### E2E-X□D1S With Diagnostic Output

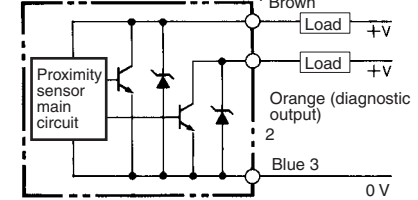

- Note:** Connect both the loads to the +V side of the control output and diagnostic output.


##### E2E-X□D2 Without Diagnostic Output

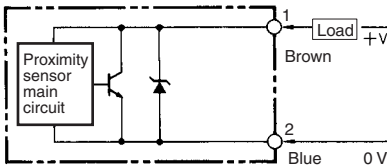

- Note:** 1. The load can be connected to either the +V or 0 V side.  
2. The pin numbers in the above diagram are for the -M□G. For -M1 models, pin 2 is +V and pin 3 is 0 V.


## DC 3-wire Models

##### E2E-X□E□ NPN Output

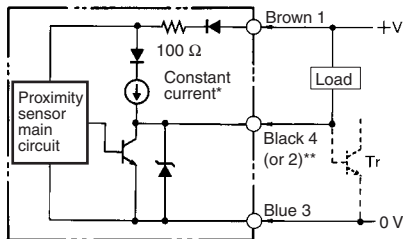


- \* Constant current output is 1.5 to 3 mA.  
\*\* Pin 4 is an NO contact, and pin 2 is an NC contact.

##### E2E-X□F□ PNP Output

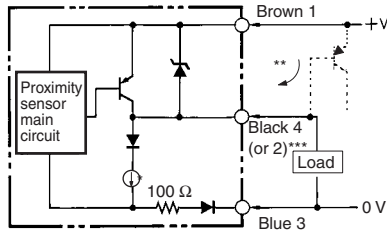


- \* Constant current output is 1.5 to 3 mA.  
\*\* When connecting to a Tr circuit.  
\*\*\* Pin 4 is an NO contact, and pin 2 is an NC contact.

##### E2E-C/X□C□ NPN Open-collector Output

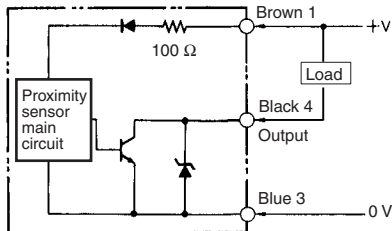

- \* E2E-CR6□ has no 100-Ω resistance.


##### E2E-C/X□B□ PNP Open-collector Output

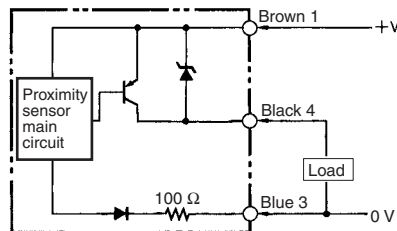

- \* E2E-CR6□ has no 100-Ω resistance.




## E2E-X□Y□ AC 2-wire Models

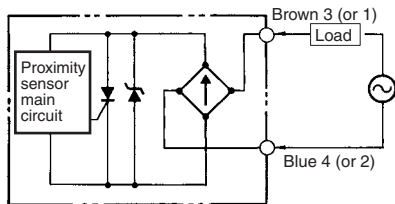

**Note:** For connector models, the connection between pins 3 and 4 uses an NO contact, and the connection between pins 1 and 2 uses an NC contact.


## E2E-X□T1 AC/DC 2-wire Models

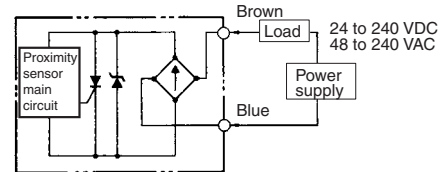

**Note:** The load can be connected to either the +V or 0 V side. There is no need to be concerned about the polarity (Brown/Blue) of the Proximity Sensor.


## E2E2

### E2E2-X□D□ DC 2-wire Models

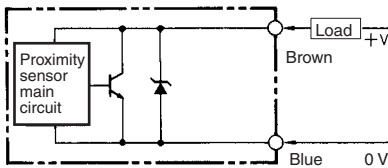


**Note:** The load can be connected to either the +V or 0 V side.

### E2E2-X□C□ DC 3-wire Models

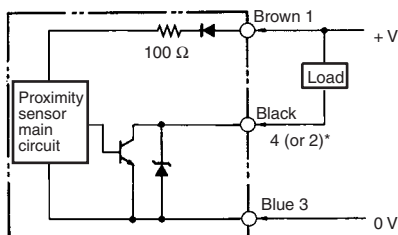


\* Pin 4 is an NO contact, and pin 2 is an NC contact.

### E2E2-X□B□ DC 3-wire Models

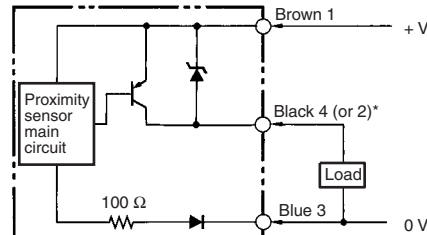

\* Pin 4 is an NO contact, and pin 2 is an NC contact.

### E2E2-X□Y□ DC 2-wire Models

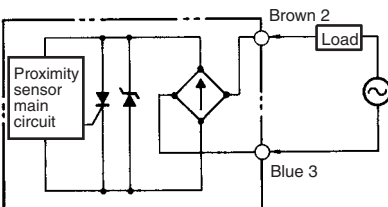



# Timing Charts

## E2E


### E2E-X□D□ DC 2-wire Models E2E-X□T1 AC/DC 2-wire Models

E2E-X□D1  
E2E-X□T1  
NO Models

E2E-X□D2  
NC Models

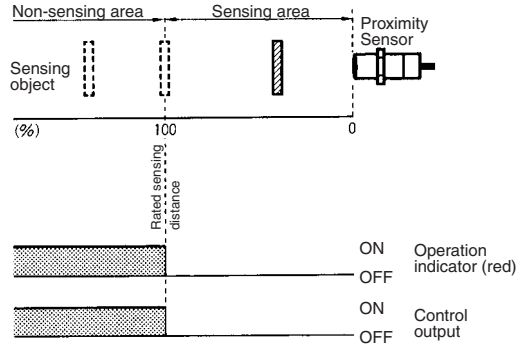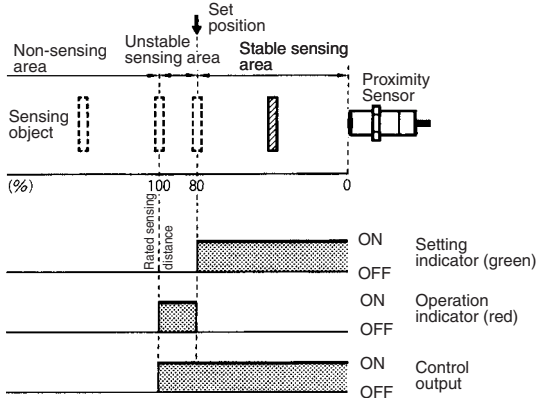


### E2E-X□D1S

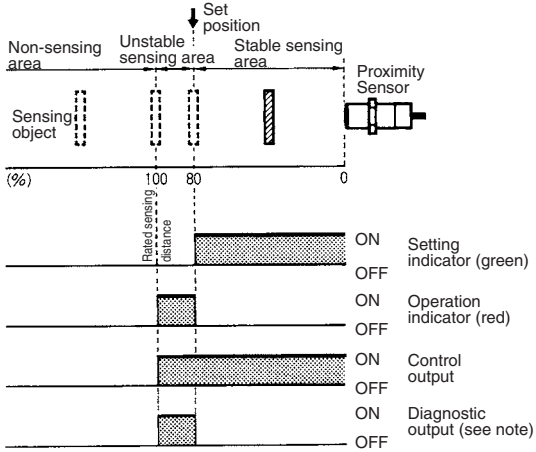


**Note:** The diagnostic output of the E2E-X□D1S is ON when there is a coil burnout or the sensing object is located in the unstable sensing range for 0.3 s or more.

## DC 3-wire Models


E2E-X□E□  
NPN Output

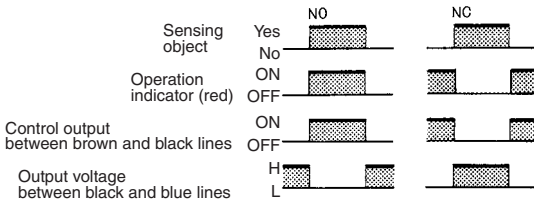

E2E-X□F□  
PNP Output

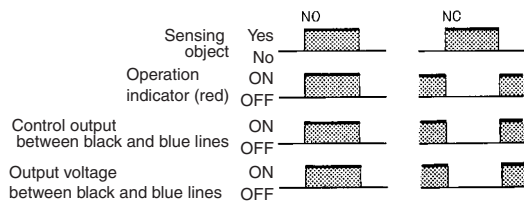

E2E-C/X□C□/B□  
NPN/PNP Open-collector Output

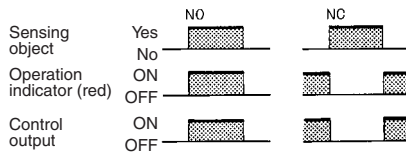


## E2E-X□Y□ AC 2-wire Models

Sensing object	Yes	NO	NC
No			
Operation indicator (red)	ON		
OFF			
Control output	ON		
OFF			


## E2E2

### E2E2-X□D□ DC 2-wire Models

#### NO Models

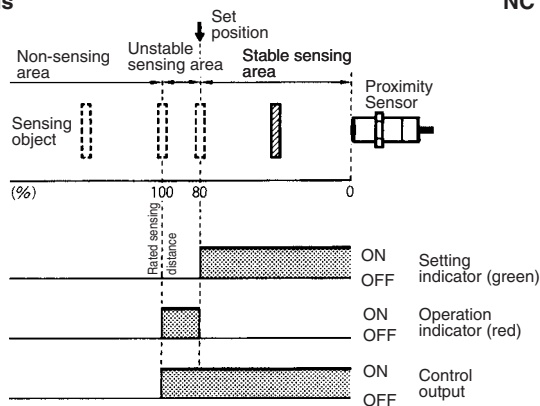

#### NC Models

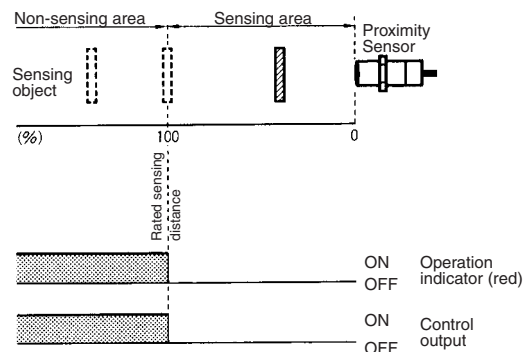

### E2E2-X□C□/B□ DC 3-wire Models

#### NPN/PNP Open-collector Output

Sensing object	Yes	NO	NC
No			
Operation indicator (red)	ON		
OFF			
Control output	ON		
OFF			

### E2E2-X□Y□ AC 2-wire Models

Sensing object	Yes	NO	NC
No			
Operation indicator (red)	ON		
OFF			
Control output	ON		
OFF			

# Installation


## ■ Connection

### E2E

**E2E-X□D□**  
DC 2-wire Models  
(Without Diagnostic Output)


**E2E-X□Y□**  
AC 2-wire Models

**E2E-X□T1**  
AC/DC 2-wire Models

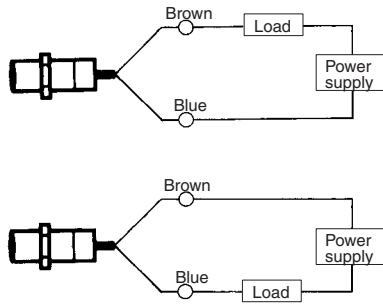

**Note:** The load can be connected as shown above.

**E2E-X□D1S**  
DC 3-wire Models  
(With Diagnostic Output)




**Note:** The control output and diagnostic output share the negative common terminal. Therefore, the loads must be connected to the positive sides of the control output and diagnostic output.

**E2E-X□D1-M1J-T**  
DC 2-wire Models  
(No Polarity)

**E2E-X□Y□**  
AC 2-wire Models


**E2E-X□T1**  
AC/DC 2-wire Models

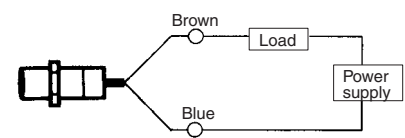


**Note:** There is no need to be concerned about the polarity (Brown/Blue) of the Proximity Sensor.

### Connected to PC

**E2E-X□D□**  
DC 2-wire Models

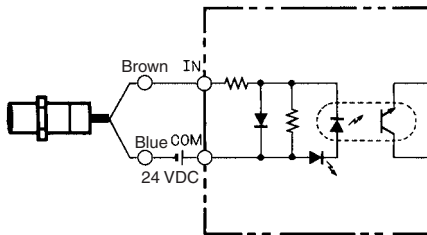


**E2E-X□E□**  
DC 3-wire Models

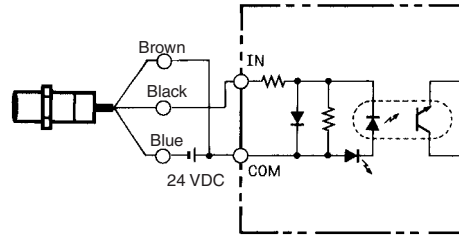


### Connected to Relay Load


**E2E-X□D□**  
DC 2-wire Models

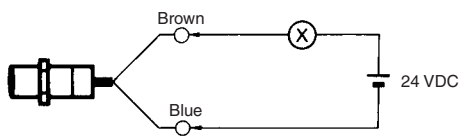

**E2E-X□E□**  
DC 3-wire Models

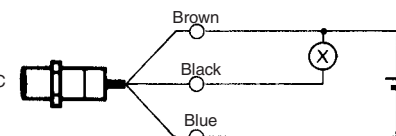


**E2E-X□F□**  
DC 3-wire Models

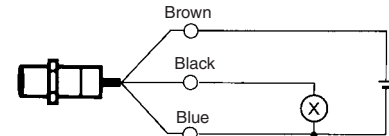

## E2E2


E2E2-X□D□  
DC 2-wire Models

E2E2-X□Y□  
AC 2-wire Models

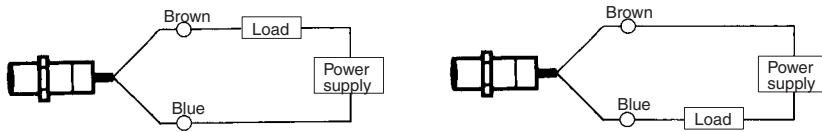


**Note:** The load can be connected as shown in the above diagrams.

Connected to PC  
E2E2-X□D□  
DC 2-wire Models















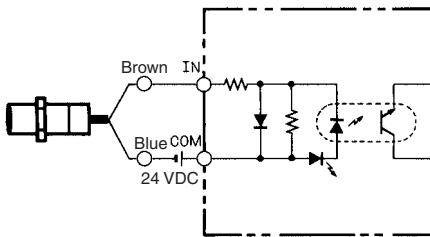


E2E2-X□C□  
DC 3-wire Models

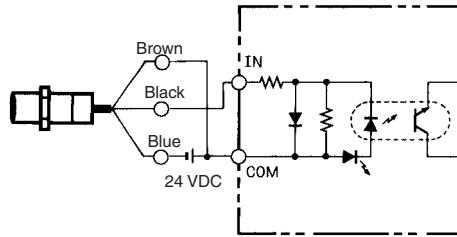









## Pin Arrangement

### E2E-X□D□-M□ DC 2-wire Models

Connector	Self-diagnostic output	Operation mode	Applicable models	Pin arrangement
M12	No	NO	E2E-X□D1-M1G□ (See note.)	  <p><b>Note:</b> Terminals 2 and 3 are not used.</p>
			E2E-X□D1-M1J-T	  <p><b>Note:</b> 1. Terminals 1 and 2 are not used. 2. Terminals 3 and 4 has no polarity.</p>
			E2E-X□D1-M1	  <p><b>Note:</b> Terminals 1 and 2 are not used.</p>
		NC	E2E-X□D2-M1G (See note.)	  <p><b>Note:</b> Terminals 3 and 4 are not used.</p>
			E2E-X□D2-M1	  <p><b>Note:</b> Terminal 1 is not used.</p>
			E2E-X□D1S-M1	<p>(Self-diagnostic output)</p>  <p><b>Note:</b> Terminals 1 is not used.</p>
M8	No	NO	E2E-X□D1-M3G	  <p><b>Note:</b> Terminals 2 and 3 are not used.</p>
		NC	E2E-X□D2-M3G	  <p><b>Note:</b> Terminals 3 and 4 are not used.</p>

**Note:** The above pin arrangements conform to IEC standards.

**E2E-X□E/F□-M□ DC 3-wire Models**

Connector	Operation mode	Applicable models	Pin arrangement
M12	NO	E2E-X□E1-M1	 <p><b>Note:</b> Terminal 2 is not used.</p>
		E2E-X□F1-M1	 <p><b>Note:</b> Terminal 2 is not used.</p>
	NC	E2E-X□E2-M1	 <p><b>Note:</b> Terminal 4 is not used.</p>
		E2E-X□F2-M1	 <p><b>Note:</b> Terminal 4 is not used.</p>
M8	NO	E2E-X□E1-M3	 <p><b>Note:</b> Terminal 2 is not used.</p>
		E2E-X□F1-M3	 <p><b>Note:</b> Terminal 2 is not used.</p>
	NC	E2E-X□E2-M3	 <p><b>Note:</b> Terminal 4 is not used.</p>
		E2E-X□F2-M3	 <p><b>Note:</b> Terminal 4 is not used.</p>

### E2E-CR8C□/CR8B□/X1C□/X1B□-M5 DC 3-wire Models

Connector	Operation mode	Applicable models	Pin arrangement
M8-3pin	NO/NC	E2E-CR8C□-M5 E2E-X1C□-M5	
	NO/NC	E2E-CR8B□-M5 E2E-X1B□-M5	


### E2E-X□Y□-M1 AC 2-wire Models

Operation mode	Applicable models	Pin arrangement
NO	E2E-X□Y1-M1	  <b>Note:</b> Terminals 1 and 2 are not used.
NC	E2E-X□Y2-M1	  <b>Note:</b> Terminals 3 and 4 are not used.

## Precautions

### Mounting


Do not tighten the nut with excessive force. A washer must be used with the nut.

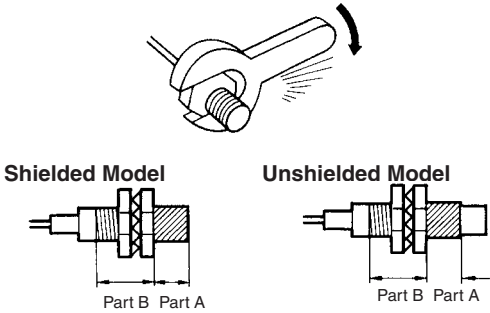

**Note:** The table below shows the tightening torques for part A and part B nuts. In the previous examples, the nut is on the sensor head side (part B) and hence the tightening torque for part B applies. If this nut is in part A, the tightening torque for part A applies instead.

Model	Part A		Part B
	Length	Torque	
M5	1 N-m		
M8	Shielded 9 mm	9 N-m	12 N-m
	Unshielded 3 mm		
M12	30 N-m		
M18	70 N-m		
M30	180 N-m		

Refer to the following to mount the E2E-CR6, -CR8 and E2E-C1 non-screw models.

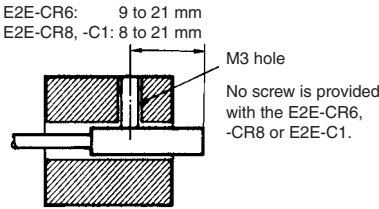


Tighten the screw to a torque of 0.2 N-m maximum to secure the E2E-CR6, -CR8 and a torque of 0.4 N-m maximum to secure the E2E-C1.



## Influence of Surrounding Metal

When mounting the E2E within a metal panel, ensure that the clearances given in the following table are maintained. Failure to maintain these distances may cause deterioration in the performance of the sensor.

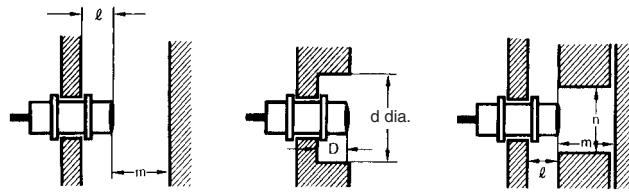

Model		Item	M8	M12	M18	M30
E2E-X□D□ DC 2-wire E2E-X□T1 AC/DC 2-wire E2E2-X□D□ DC 2-wire	Shielded	l	0 mm			
		d	8 mm	12 mm	18 mm	30 mm
		D	0 mm			
		m	4.5 mm	8 mm	20 mm	40 mm
		n	12 mm	18 mm	27 mm	45 mm
	Unshielded	l	12 mm	15 mm	22 mm	30 mm
		d	24 mm	40 mm	70 mm	90 mm
		D	12 mm	15 mm	22 mm	30 mm
		m	8 mm	20 mm	40 mm	70 mm
		n	24 mm	40 mm	70 mm	90 mm
E2E-X□E□ E2E-X□F□ DC 3-wire E2E-X□Y□ AC 2-wire E2E2-X□B□ E2E2-X□C□ DC 3-wire E2E2-X□Y□ AC 2-wire	Shielded	l	0 mm			
		d	8 mm	12 mm	18 mm	30 mm
		D	0 mm			
		m	4.5 mm	8 mm	20 mm	40 mm
		n	12 mm	18 mm	27 mm	45 mm
	Unshielded	l	6 mm	15 mm	22 mm	30 mm
		d	24 mm	40 mm	55 mm	90 mm
		D	6 mm	15 mm	22 mm	30 mm
		m	8 mm	20 mm	40 mm	70 mm
		n	24 mm	36 mm	54 mm	90 mm

Model		Item	3 dia.	4 dia.	M5	5.4 dia.
E2E-X□C□ E2E-X□B□ E2E-C□C□ E2E-C□B□ DC 3-wire	Shielded	l	0 mm			
		d	3 mm	4 mm	5 mm	5.4 mm
		D	0 mm			
		m	2 mm	2.4 mm	3 mm	3 mm
		n	6 mm	6 mm	8 mm	8 mm

## Relationship between Sizes and Models

### E2E


Model		Model No.
3 dia.	Shielded	E2E-CR6C□ E2E-CR6B□
4 dia.		E2E-CR8C□ E2E-CR8B□
M5		E2E-X1C□ E2E-X1B□
5.4 dia.		E2E-C1C□ E2E-C1B□
M8	Shielded	E2E-X2D□ E2E-X1R5E□/F□ E2E-X1R5Y□
	Unshielded	E2E-X4MD□ E2E-X2ME□/F□ E2E-X2MY□
M12	Shielded	E2E-X3D□ E2E-X2E□/F□ E2E-X2Y□ E2E-X3T1
	Unshielded	E2E-X8MD□ E2E-X5ME□/F□ E2E-X5MY□
M18	Shielded	E2E-X7D□ E2E-X5E□/F□ E2E-X5Y□ E2E-X7T1
	Unshielded	E2E-X14MD□ E2E-X10ME□/F□ E2E-X10MY□
M30	Shielded	E2E-X10D□ E2E-X10E□/F□ E2E-X10Y□ E2E-X10T1
	Unshielded	E2E-X20MD□ E2E-X18ME□/F□ E2E-X18MY□

### E2E2

Model		Model No.
M12	Shielded	E2E2-X3D□ E2E2-X2C□/B□ E2E2-X2Y□
	Unshielded	E2E2-X8MD□ E2E2-X5MC□/B□ E2E2-X5MY□
M18	Shielded	E2E2-X7D□ E2E2-X5C□/B□ E2E2-X5Y□
	Unshielded	E2E2-X14MD□ E2E2-X10MC□/B□ E2E2-X10MY□
M30	Shielded	E2E2-X10D□ E2E2-X10C□/B□ E2E2-X10Y□
	Unshielded	E2E2-X20MD□ E2E2-X18MC□/B□ E2E2-X18MY□

## Mutual Interference

When installing two or more Sensors face to face or side by side, ensure that the minimum distances given in the following table are maintained.



Model		Item	M8	M12	M18	M30
E2E-X□D□ DC 2-wire	Shielded	A	20 mm	30 (20) mm	50 (30) mm	100 (50) mm
		B	15 mm	20 (12) mm	35 (18) mm	70 (35) mm
E2E-X□T1 AC/DC 2-wire	Unshielded	A	80 mm	120 (60) mm	200 (100) mm	300 (100) mm
		B	60 mm	100 (50) mm	110 (60) mm	200 (100) mm
E2E2-X□D□ DC 2-wire	Shielded	A	20 mm	30 (20) mm	50 (30) mm	100 (50) mm
		B	15 mm	20 (12) mm	35 (18) mm	70 (35) mm
E2E-X□E□ E2E-X□F□ DC 3-wire	Unshielded	A	80 mm	120 (60) mm	200 (100) mm	300 (100) mm
		B	60 mm	100 (50) mm	110 (60) mm	200 (100) mm
E2E-X□Y□ AC 2-wire	Shielded	A	20 mm	30 (20) mm	50 (30) mm	100 (50) mm
		B	15 mm	20 (12) mm	35 (18) mm	70 (35) mm
E2E2-X□B□ E2E2-X□C□ DC 3-wire	Unshielded	A	80 mm	120 (60) mm	200 (100) mm	300 (100) mm
		B	60 mm	100 (50) mm	110 (60) mm	200 (100) mm
E2E2-X□Y□ AC 2-wire	Shielded	A	20 mm	30 (20) mm	50 (30) mm	100 (50) mm
		B	15 mm	20 (12) mm	35 (18) mm	70 (35) mm

Model		Item	3 dia.	4 dia.	M5	5.4 dia.
E2E-X□B□ E2E-X□C□ E2E-C□B□ E2E-C□C□ DC 3-wire	Shielded	A	20 mm			
		B	15 mm			

**Note:** Values in parentheses apply to Sensors operating at different frequencies.

**⚠ WARNING**

This product is not designed or rated for ensuring safety of persons.  
Do not use it for such purposes.



## ■ Precautions for Safe Use

The colors in parentheses are previous wire colors.

Item	Examples	
<b>Power supply</b> Do not impose an excessive voltage on the E2E/E2E2, otherwise it may explode or burn. Do not impose 100 VAC on any E2E/E2E2 DC Model, otherwise it may explode or burn.	<b>DC 3-wire Models</b> <b>Incorrect</b>	<b>DC 2-wire Models</b> <b>Incorrect</b>
<b>Load short-circuit</b> Do not short-circuit the load, or the E2E/E2E2 may explode or burn. The E2E/E2E2's short-circuit protection function is valid if the polarity of the supply voltage imposed is correct and within the rated voltage range.	<b>DC 3-wire Models (NPN output)</b> <b>Incorrect</b>	<b>DC 2-wire Models</b> The following diagram shows that the load is short-circuited while the polarity of the supply voltage imposed on the E2E/E2E2 is wrong, in which case the E2E/E2E2 may explode or burn. <b>Incorrect</b>
<b>Wiring</b> Be sure to wire the E2E/E2E2 and load correctly, otherwise it may explode or burn.	<b>DC 3-wire Models (NPN output)</b> <b>Incorrect</b>	<b>Incorrect</b>
<b>Connection with no load</b> Make sure to connect a proper load to the E2E/E2E2 in operation, otherwise it may explode or burn.	<b>DC 3-wire Models</b> <b>Incorrect</b>	<b>AC 2-wire Models</b> <b>Incorrect</b>

## ■ Precautions for Correct Use

### Installation

#### Power Reset Time

The Proximity Sensor is ready to operate within 100 ms after power is supplied. If power supplies are connected to the Proximity Sensor and load respectively, be sure to supply power to the Proximity Sensor before supplying power to the load.

#### Power OFF

The Proximity Sensor may output a pulse signal when it is turned OFF. Therefore, it is recommended to turn OFF the load before turning OFF the Proximity Sensor.

#### Power Supply Transformer

When using a DC power supply, make sure that the DC power supply has an insulated transformer. Do not use a DC power supply with an auto-transformer.

### Sensing Object

Metal Coating:

The sensing distances of the Proximity Sensor vary with the metal coating on sensing objects.



# Connection to a PLC

## Required Conditions

Connection to a PLC is possible if the specifications of the PLC and the Proximity Sensor satisfy the following conditions. (The meanings of the symbols are given below.)

1. The ON voltage of the PLC and the residual voltage of the Proximity Sensor must satisfy the following.  

$$V_{ON} \leq V_{CC} - V_R$$
2. The OFF current of the PLC and the leakage current of the Proximity Sensor must satisfy the following.  

$$I_{OFF} \geq I_{leak}$$

(If the OFF current is not listed in the specifications, take it to be 1.3 mA.)
3. The ON current of the PLC and the control output ( $I_{OUT}$ ) of the Proximity Sensor must satisfy the following.  

$$I_{OUT(min)} \leq I_{ON} \leq I_{OUT(max)}$$

The ON current of the PLC will vary, however, with the power supply voltage and the input impedance used as shown in the following equation.

$$I_{ON} = (V_{CC} - V_R - V_{PC}) / R_{IN}$$

## Example

In this example, the above conditions are checked for when the PLC model is the C200H-ID212, the Proximity Sensor model is the E2E-X7D1-N, and the power supply voltage is 24 V.

1.  $V_{ON} (14.4 \text{ V}) \leq V_{CC} (20.4 \text{ V}) - V_R (3 \text{ V}) = 17.4 \text{ V}$ : OK
2.  $I_{OFF} (1.3 \text{ mA}) \geq I_{leak} (0.8 \text{ mA})$ : OK
3.  $I_{ON} = [V_{CC} (20.4 \text{ V}) - V_R (3 \text{ V}) - V_{PC} (4 \text{ V})] / R_{IN} (3 \text{ k}\Omega) \approx 4.5 \text{ mA}$   
 Therefore,  
 $I_{OUT(min)} (3 \text{ mA}) \leq I_{ON} (4.5 \text{ mA})$ : OK

$V_{ON}$ : ON voltage of PLC (14.4 V)

$I_{ON}$ : ON current of PLC (typ. 7 mA)

$I_{OFF}$ : OFF current of PLC (1.3 mA)

$R_{IN}$ : Input impedance of PLC (3 k $\Omega$ )

$V_{PC}$ : Internal residual voltage of PLC (4 V)

$V_R$ : Output residual voltage of Proximity Sensor (3 V)

$I_{leak}$ : Leakage current of Proximity Sensor (0.8 mA)

$I_{OUT}$ : Control output of Proximity Sensor (3 to 100 mA)

$V_{CC}$ : Power supply voltage (PLC: 20.4 to 26.4 V)

Values in parentheses are for the following PLC model and Proximity Sensor model.




PLC: C200H-ID212

Proximity Sensor: E2E-X7D1-N

# ■ Precautions for AC/DC 2-wire Proximity Sensors in Operation

## Connection

Model	Connection type	Method	Description
DC 2-wire	AND (serial connection)	<p><b>Correct</b></p>	<p>The Sensors connected together must satisfy the following conditions.</p> $V_S - N \times V_R \geq \text{Load operating voltage}$ <p><math>N</math>: No. of Sensors  <math>V_R</math>: Residual voltage of each Sensor  <math>V_S</math>: Supply voltage</p> <p>If each Proximity Sensor is not supplied with the rated voltage and current, the indicator will not be lit properly or unnecessary pulses may be output for approximately 1 ms.</p>
	OR (parallel connection)	<p><b>Correct</b></p>	<p>The Sensors connected together must satisfy the following conditions.</p> $N \times i \leq \text{Load reset current}$ <p><math>N</math>: No. of Sensors  <math>i</math>: Leakage current of each Sensor</p> <p>If the MY Relay, which operates at 24 VDC, is used as a load for example, a maximum of four Proximity Sensors can be connected to the load.</p>
AC 2-wire	AND (serial connection)	<p><b>Incorrect</b></p> <p><b>Correct</b></p>	<p>If 100 or 200 VAC is imposed on the Proximity Sensors, <math>V_L</math> (i.e., the voltage imposed on the load) will be obtained from the following.</p> $V_L = V_S - (\text{residual voltage} \times \text{No. of Proximity Sensors}) \text{ (V)}$ <p>Therefore, if <math>V_L</math> is lower than the load operating voltage, the load will not operate.</p> <p>A maximum of three Proximity Sensors can be connected in series provided that the supply voltage is 100 V minimum.</p>

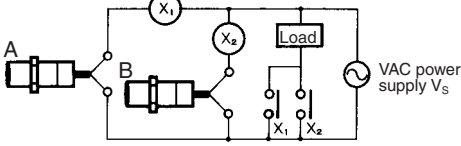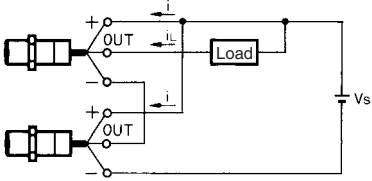Model	Connection type	Method	Description
AC 2-wire	OR (parallel connection)	<p><b>Incorrect</b></p>  <p><b>Correct</b></p>  <p>VAC power supply <math>V_s</math></p>	<p>In principle, more than two Proximity Sensors cannot be connected in parallel.</p> <p>Provided that Proximity Sensor A does not operate with Proximity Sensor B simultaneously and there is no need to keep the load operating continuously, the Proximity Sensors can be connected in parallel. In this case, however, due to the total leakage current of the Proximity Sensors, the load may not reset properly.</p> <p>It is not possible to keep the load operating continuously with Proximity Sensors A and B in simultaneous operation to sense sensing objects due to the following reason.</p> <p>When Proximity Sensor A is ON, the voltage imposed on Proximity Sensor A will drop to approximately 10 V and the load current flows into Proximity Sensor A, and when one of the sensing objects is close to Proximity Sensor B, Proximity Sensor B will not operate because the voltage imposed on Proximity Sensor B is 10 V, which is too low. When Proximity Sensor A is OFF, the voltage imposed on Proximity Sensor B will reach the supply voltage and Proximity Sensor B will be ON. Then, Proximity Sensor A as well as Proximity Sensor B will be OFF for approximately 10 ms, which resets the load for an instant. To prevent the instantaneous resetting of the load, use a relay as shown on the left.</p>
DC 3-wire	AND (serial connection)	<p><b>Correct</b></p>  <p><math>V_s</math></p>	<p>The Sensors connected together must satisfy the following conditions.</p> $i_L + (N - 1) \times i \leq \text{Upper-limit of control output of each Sensor}$ $V_s - N \times V_R \geq \text{Load operating voltage}$ <p><math>N</math>: No. of Sensors  <math>V_R</math>: Residual voltage of each Sensor  <math>V_s</math>: Supply voltage  <math>i</math>: Current consumption of the Sensor  <math>i_L</math>: Load current</p> <p>If the MY Relay, which operates at 24 VDC, is used as a load for example, a maximum of two Proximity Sensors can be connected to the load.</p>

# Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

## E2E

Model			DC 2-wire		DC 3-wire		AC 2-wire		AC/DC 2-wire	
			Model No.	Figure No.	Model No.	Figure No.	Model No.	Figure No.	Model No.	Figure No.
Pre-wired	Shielded	3 dia.	---	---	E2E-CR6□	1	---	---	---	---
		4 dia.	---	---	E2E-CR8□□	2	---	---	---	---
		M5	---	---	E2E-X1□□	4	---	---	---	---
		5.4 dia.	---	---	E2E-C1□□	3	---	---	---	---
		M8	E2E-X2D□-N	5	E2E-X1R5E□/F□	5	E2E-X1R5Y□	7	---	---
		M12	E2E-X3D□-N	9	E2E-X2E□/F□	9	E2E-X2Y□	11	E2E-X3T1	12
		M18	E2E-X7D□-N	14	E2E-X5E□/F□	14	E2E-X5Y□	12	E2E-X7T1	13
		M30	E2E-X10D□-N	16	E2E-X10E□/F□	16	E2E-X10Y□	16	E2E-X10T1	15
	Unshielded	M8	E2E-X4MD□	6	E2E-X2ME□/F□	6	E2E-X2MY□	8	---	---
		M12	E2E-X8MD□	10	E2E-X5ME□/F□	10	E2E-X5MY□	12	---	---
		M18	E2E-X14MD□	15	E2E-X10ME□/F□	15	E2E-X10MY□	15	---	---
		M30	E2E-X20MD□	17	E2E-X18ME□/F□	17	E2E-X18MY□	17	---	---
Connector (M12)	Shielded	M8	E2E-X2D□-M1(G)	18	E2E-X1R5E□-M1/F□-M1	18	---	---	---	---
		M12	E2E-X3D□-M1(G)	20	E2E-X2E□-M1/F□-M1	20	E2E-X2Y□-M1	22	---	---
		M18	E2E-X7D□-M1(G)	24	E2E-X5E□-M1/F□-M1	24	E2E-X5Y□-M1	24	---	---
		M30	E2E-X10D□-M1(G)	26	E2E-X10E□-M1/F□-M1	26	E2E-X10Y□-M1	26	---	---
	Unshielded	M8	E2E-X4MD□-M1(G)	19	E2E-X2ME□-M1/F□-M1	19	---	---	---	---
		M12	E2E-X8MD□-M1(G)	21	E2E-X5ME□-M1/F□-M1	21	E2E-X5MY□-M1	23	---	---
		M18	E2E-X14MD□-M1(G)	25	E2E-X10ME□-M1/F□-M1	25	E2E-X10MY□-M1	25	---	---
		M30	E2E-X20MD□-M1(G)	27	E2E-X18ME□-M1/F□-M1	27	E2E-X18MY□-M1	27	---	---
Connector (M8-3 pin)	Shielded	4 dia.	---	---	E2E-CR8□□-M5	36	---	---	---	---
		M5	---	---	E2E-X1□□-M5	37	---	---	---	---
Connector (M8)	Shielded	M8	E2E-X2D□-M3G	28	E2E-X1R5E□-M3/F□-M3	28	---	---	---	---
	Unshielded		E2E-X4MD□-M3G	29	E2E-X2ME□-M3/F□-M3	29	---	---	---	---
Pre-wired connector	Shielded	M12	E2E-X3D1-M1GJ	30	---	---	---	---	---	---
		M18	E2E-X7D1-M1GJ	32	---	---	---	---	---	---
		M30	E2E-X10D1-M1GJ	34	---	---	---	---	---	---
	Unshielded	M12	E2E-X8MD1-M1GJ	31	---	---	---	---	---	---
		M18	E2E-X14MD1-M1GJ	33	---	---	---	---	---	---
		M30	E2E-X20MD1-M1GJ	35	---	---	---	---	---	---
Pre-wired connector (no polarity)	Shielded	M12	E2E-X3D1-M1J-T	30	---	---	---	---	---	---
		M18	E2E-X7D1-M1J-T	32	---	---	---	---	---	---
		M30	E2E-X10D1-M1J-T	34	---	---	---	---	---	---

**Note 1.** Two clamping nuts and one toothed washer are provided with M8 to M30 Models.

**2.** The model numbers of Pre-wired M8 to M30 Models are laser-marked on the milled section and cable section.



## Pre-wired Models (Shielded)

Fig. 1: E2E-CR6□□

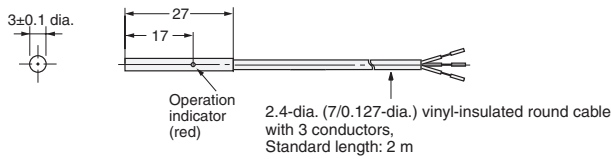


Fig. 2: E2E-CR8□□

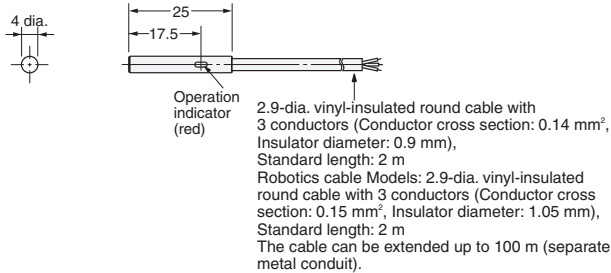


Fig. 3: E2E-C1□□



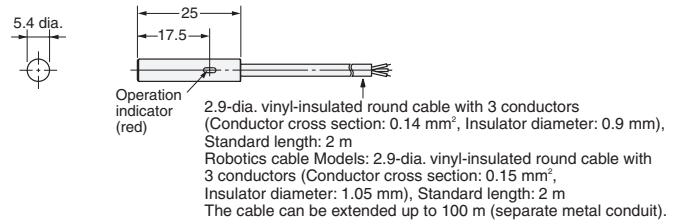


Fig. 4: E2E-X1□□

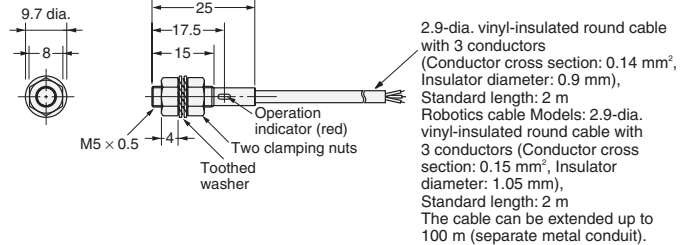

## Pre-wired Models (Shielded)

Fig. 5: E2E-X2D□-N  
E2E-X1R5E□/F□

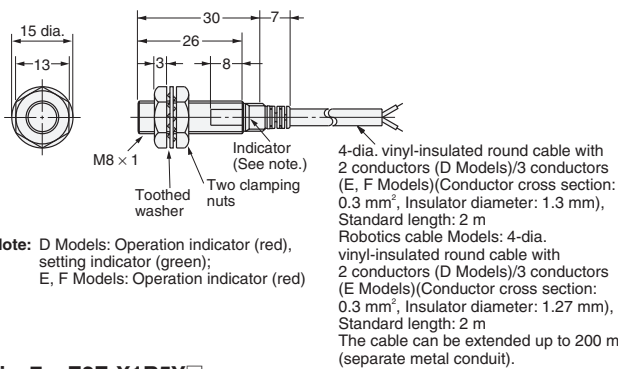

## Pre-wired Models (Unshielded)

Fig. 6: E2E-X4MD□  
E2E-X2ME□/F□

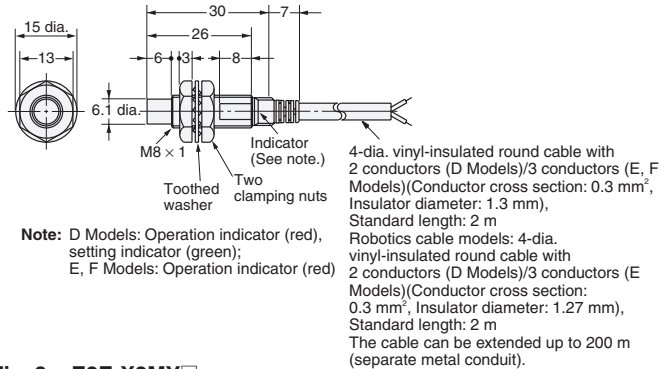


Fig. 7: E2E-X1R5Y□

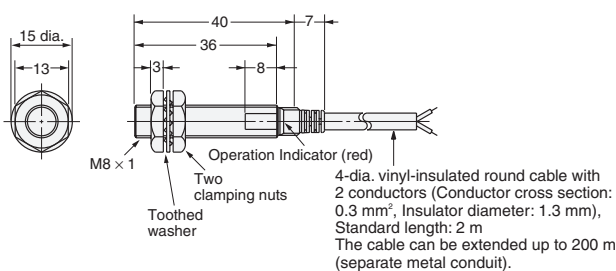


Fig. 8: E2E-X2MY□

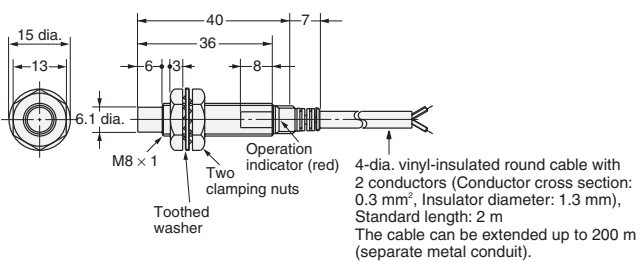


Fig. 9: E2E-X3D□-N  
E2E-X2E□/F□



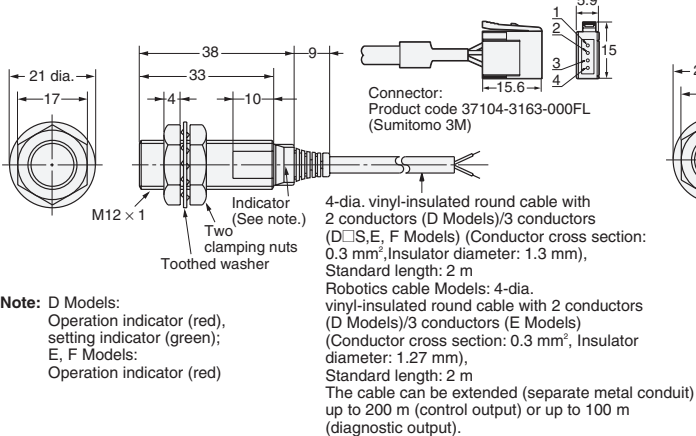


Fig. 10: E2E-X8MD□  
E2E-X5ME□/F□

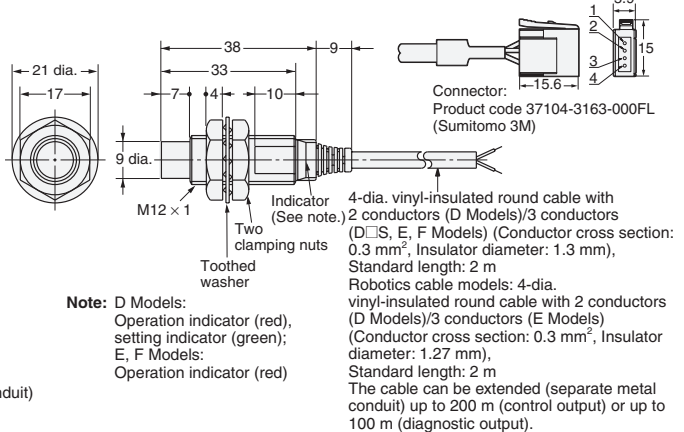


**Pre-wired Models  
(Shielded)**

**Fig. 11: E2E-X2Y□**

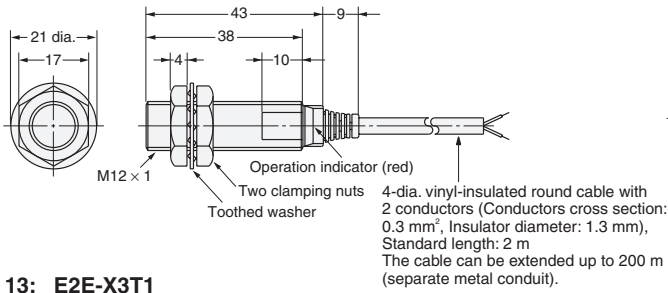


**Fig. 13: E2E-X3T1**

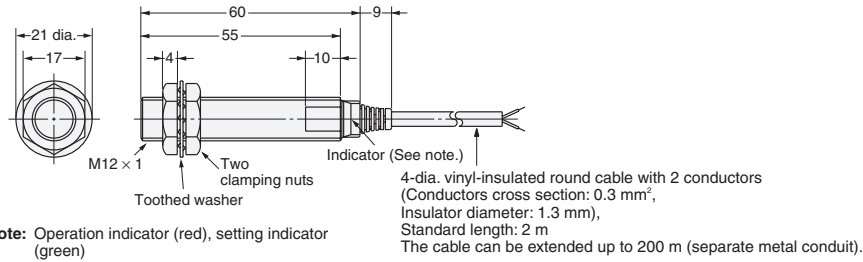


**Pre-wired Models  
(Unshielded)**


**Fig. 12: E2E-X5MY□**

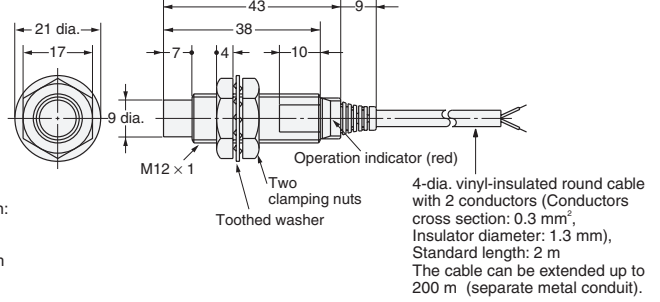


**Fig. 14: E2E-X7D□-N/  
E2E-X5E□/F□  
E2E-X5Y□/E2E-X7T1**

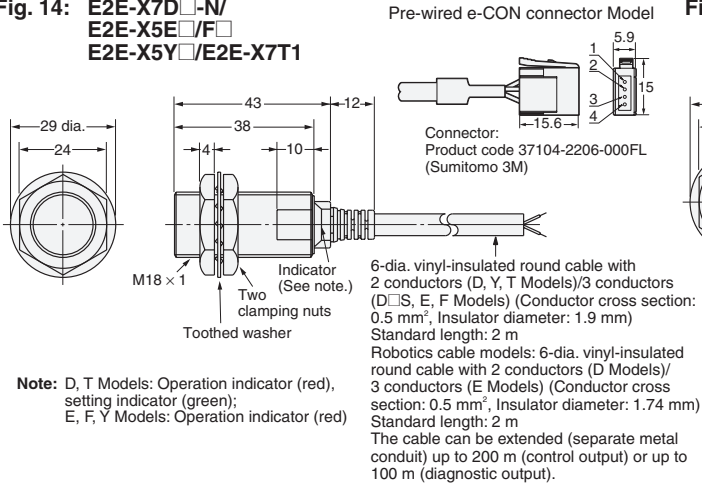


**Fig. 15: E2E-X14MD□/  
E2E-X10ME□/F□  
E2E-X10MY□**

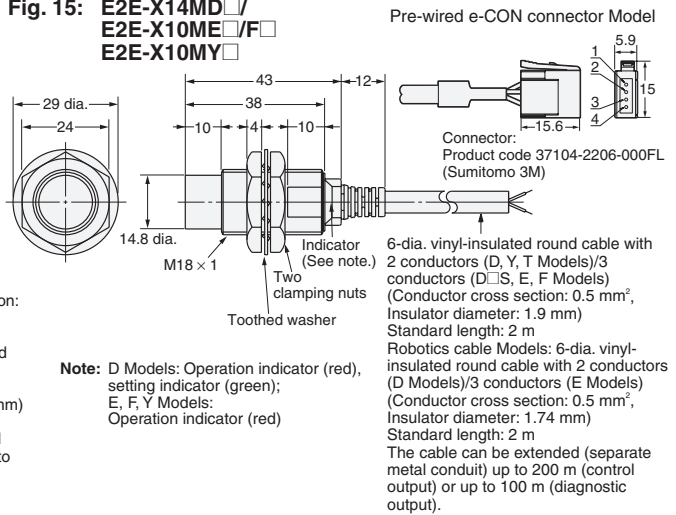

**Fig. 16: E2E-X10D□-N/  
E2E-X10E□/F□  
E2E-X10Y□/  
E2E-X10T1**

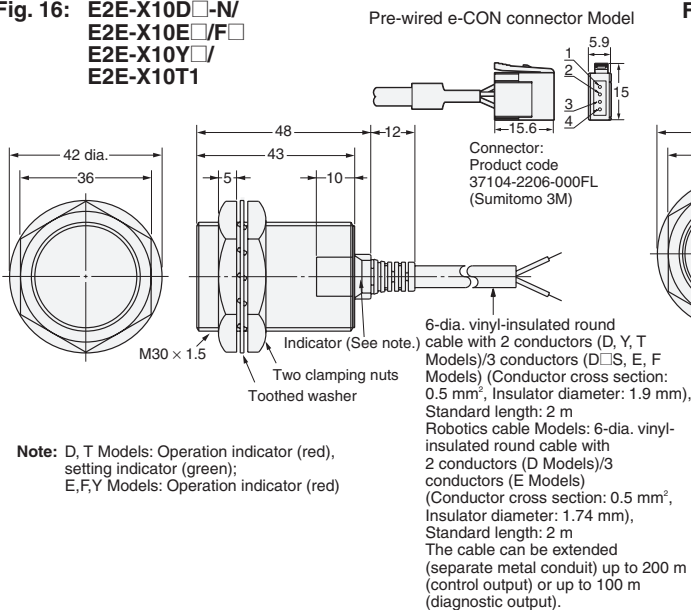


**Fig. 17: E2E-X20MD□/  
E2E-X18ME□/F□  
E2E-X18MY□**

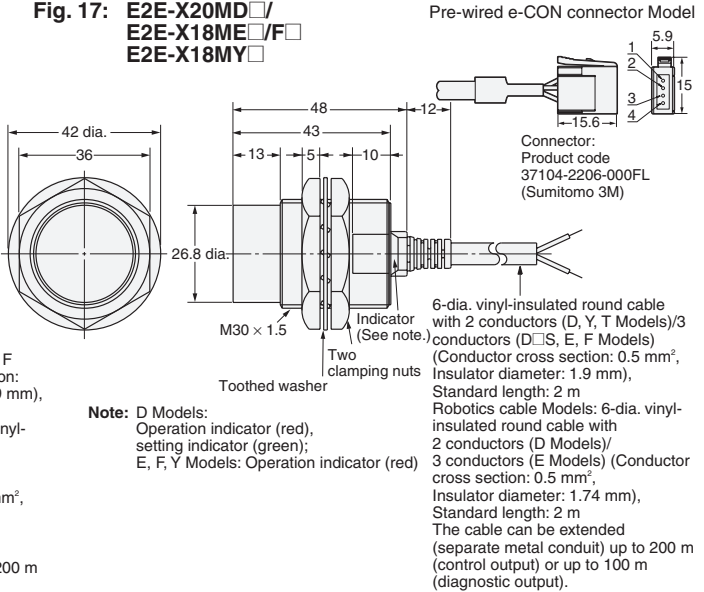


## M12 Connector Models (Shielded)

**Fig. 18: E2E-X2D□-M1(G)  
E2E-X1R5E□-M1/F□-M1**

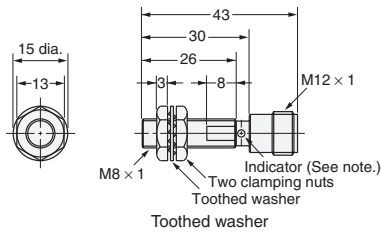


**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F Model: Operation indicator (red)

**Fig. 20: E2E-X3D□-M1(G)  
E2E-X2E□-M1/F□-M1**

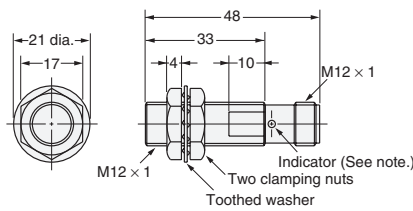


**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F Model: Operation indicator (red)

**Fig. 22: E2E-X2Y□-M1**

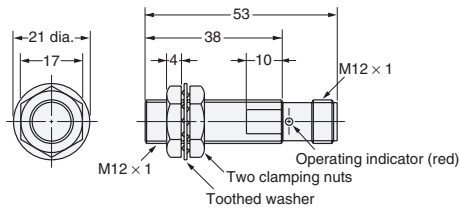


**Fig. 24: E2E-X7D□-M1(G)/E2E-X5E□-M1/F□-M1  
E2E-X5Y□-M1**

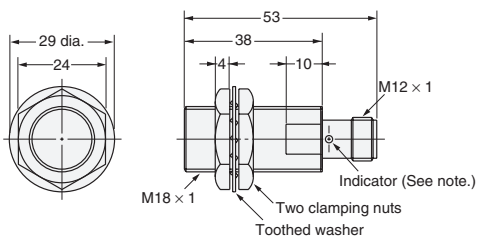

**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F, Y Model: Operation indicator (red)


**Fig. 26: E2E-X10D□-M1(G)/E2E-X10E□-M1/F□-M1  
E2E-X10Y□-M1**

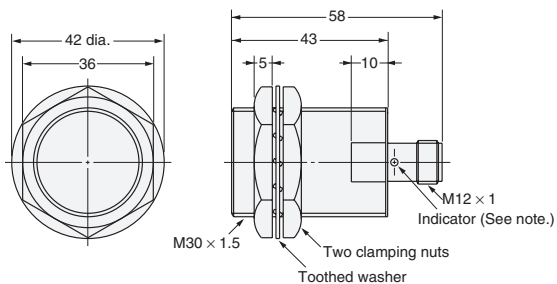

**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F, Y Model: Operation indicator (red)


## M12 Connector Models (Unshielded)

**Fig. 19: E2E-X4MD□-M1(G)  
E2E-X2ME□-M1/F□-M1**

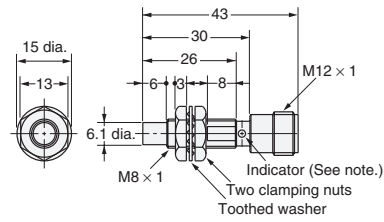


**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F Model: Operation indicator (red)

**Fig. 21: E2E-X8MD□-M1(G)  
E2E-X5ME□-M1/F□-M1**

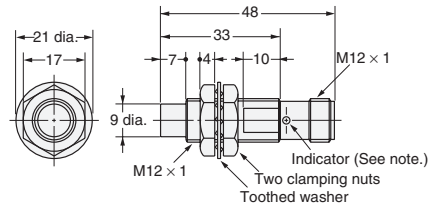


**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F Model: Operation indicator (red)

**Fig. 23: E2E-X5MY□-M1**

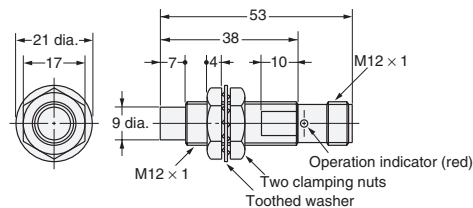


**Fig. 25: E2E-X14MD□-M1(G)/E2E-X10ME□-M1/F□-M1  
E2E-X10MY□-M1**

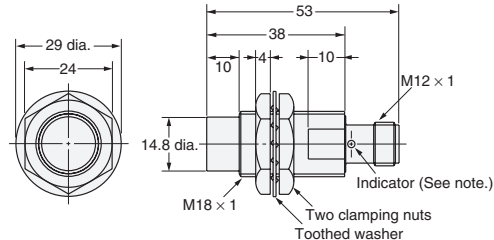

**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F, Y Model: Operation indicator (red)

**Fig. 27: E2E-X20MD□-M1(G)/E2E-X18ME□-M1/F□-M1  
E2E-X18MY□-M1**

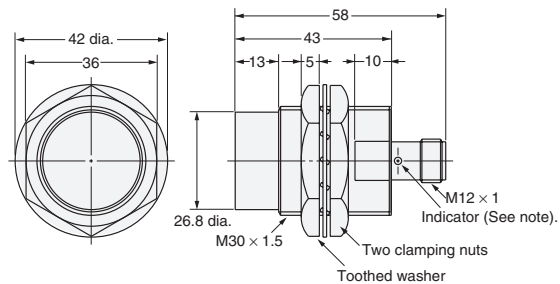

**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F, Y Model: Operation indicator (red)

# M8 (3 pin) Connector Models (Shielded)

Fig. 36: E2E-CR8□□-M5



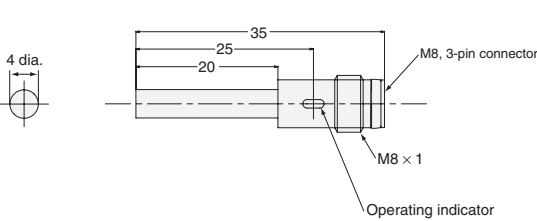


Fig. 37: E2E-X1□□-M5

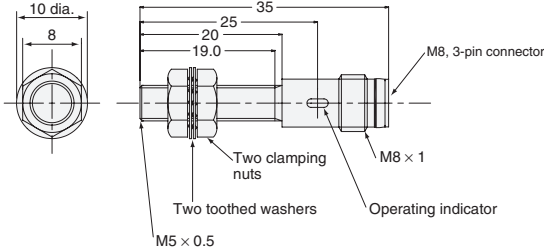

# M8 Connector Models (Shielded)


Fig. 28: E2E-X2D□-M3G/E2E-X1R5□-M3/F□-M3

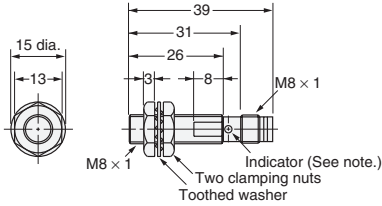

**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F Model: Operation indicator (red)

# M8 Connector Models (Unshielded)

Fig. 29: E2E-X4MD□-M3G/E2E-X2ME□-M3/F□-M3

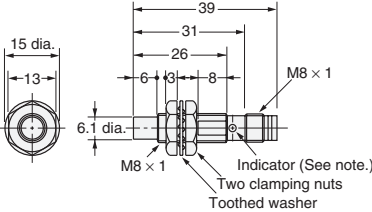

**Note:** D Models: Operation indicator (red), setting indicator (green)  
E, F Model: Operation indicator (red)

# Pre-wired M12 Connector Models

Fig. 30: E2E-X3D1-M1GJ  
E2E-X3D1-M1J-T

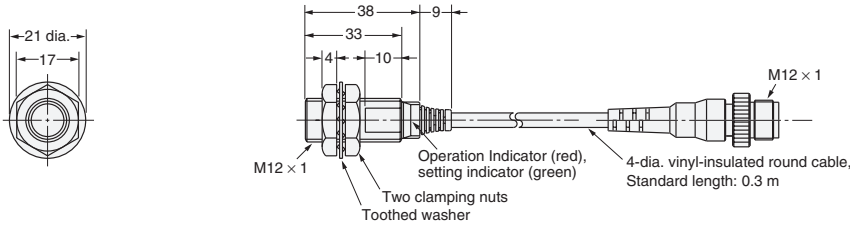


Fig. 31: E2E-X8MD1-M1GJ


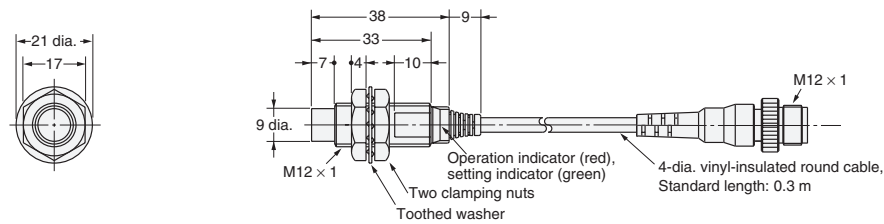


Fig. 32: E2E-X7D1-M1GJ  
E2E-X7D1-M1J-T

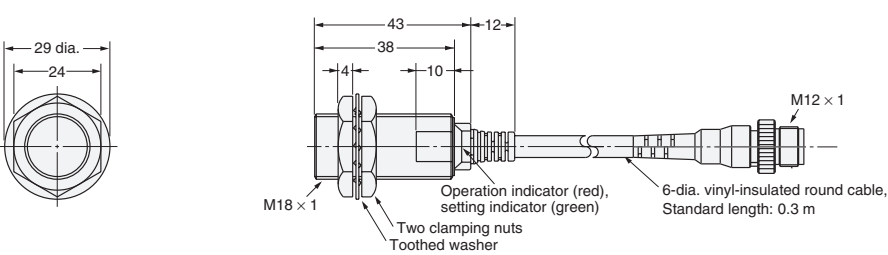

## Pre-wired M12 Connector Models

Fig. 33: E2E-X14MD1-M1GJ

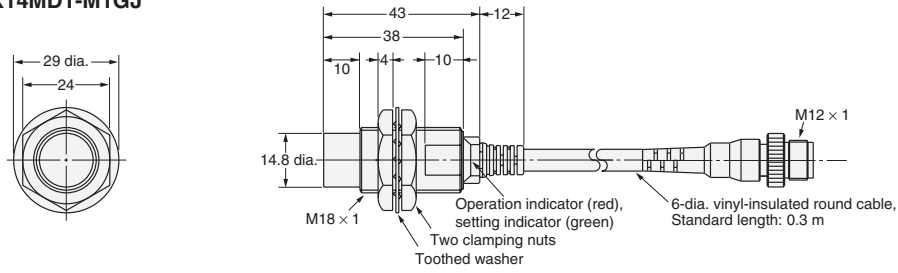


Fig. 34: E2E-X10D1-M1GJ  
E2E-X10D1-M1J-T



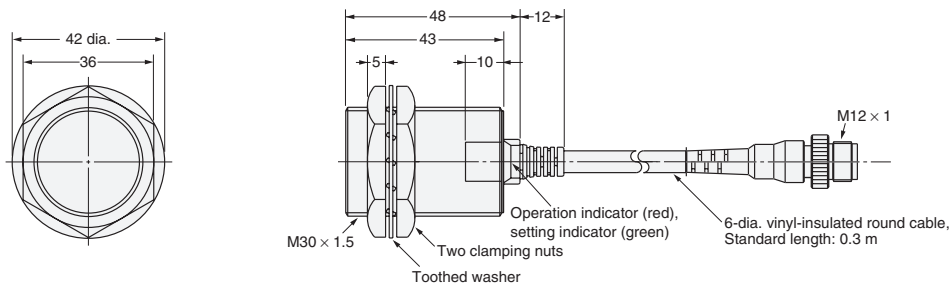


Fig. 35: E2E-X20MD1-M1GJ

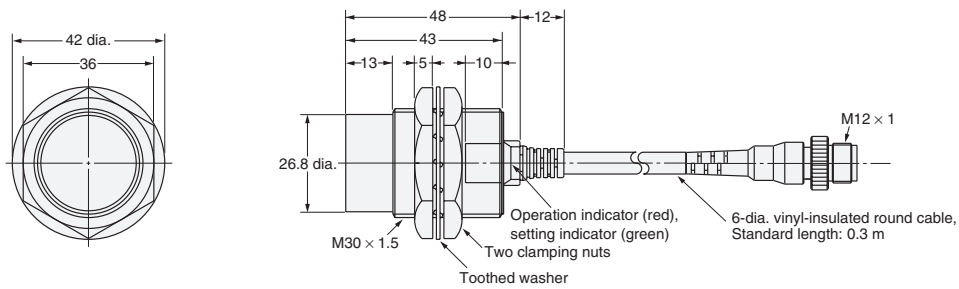

## Mounting Holes




Dimensions	3 dia.	4 dia.	M5	5.4 dia.	M8	M12	M18	M30
F (mm)	$3.3^{+0.3/0}$ dia.	$4.2^{+0.5/0}$ dia.	$5.5^{+0.5/0}$ dia.	$5.7^{+0.5/0}$ dia.	$8.5^{+0.5/0}$ dia.	$12.5^{+0.5/0}$ dia.	$18.5^{+0.5/0}$ dia.	$30.5^{+0.5/0}$ dia.


# E2E2

## Pre-wired Models


E2E2-X3D□  
E2E2-X2□□

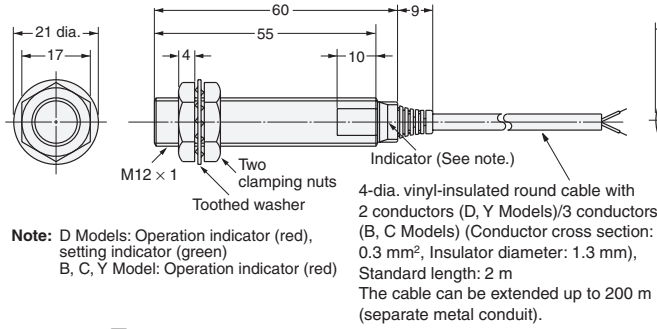


E2E2-X8MD□  
E2E2-X5M□□

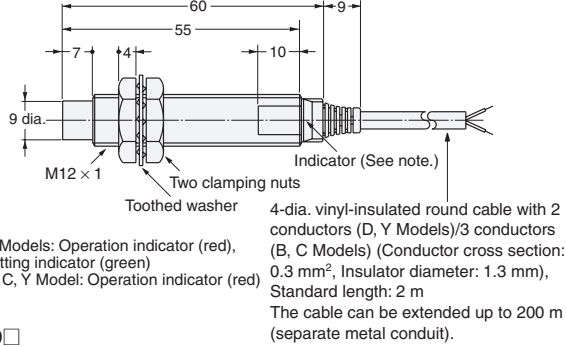


E2E2-X7D□  
E2E2-X5□□

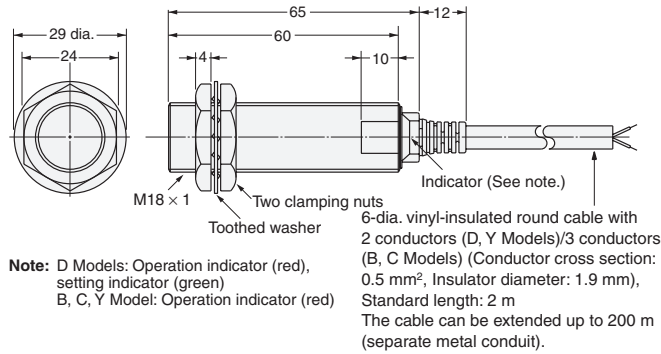


E2E2-X14MD□  
E2E2-X10M□□

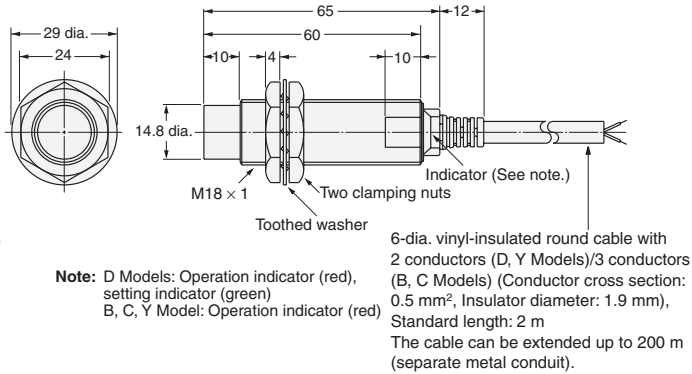

E2E2-X10D□□  
E2E2-X10□□

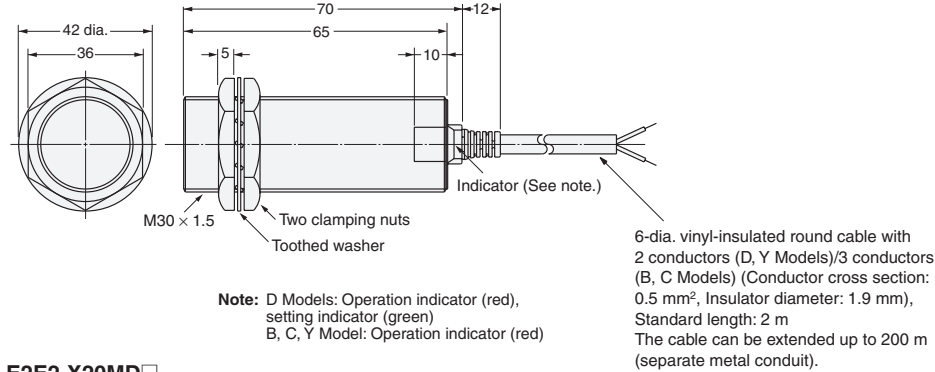


E2E2-X20MD□  
E2E2-X18M□□

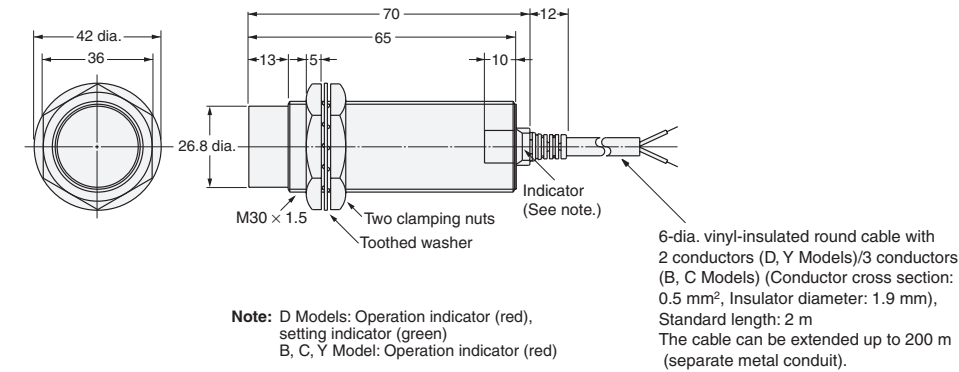


## Connector Models (Shielded)


### E2E2-X2C□-M1/B□-M1

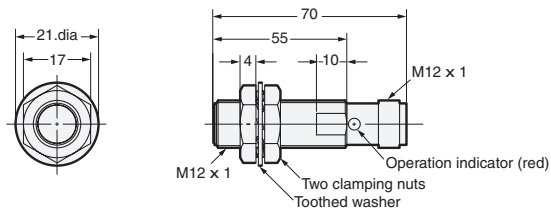


### E2E2-X2Y□-M4

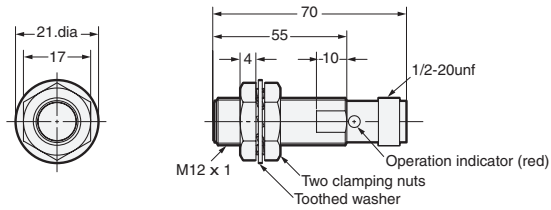

### E2E2-X5C□-M1/B□-M1

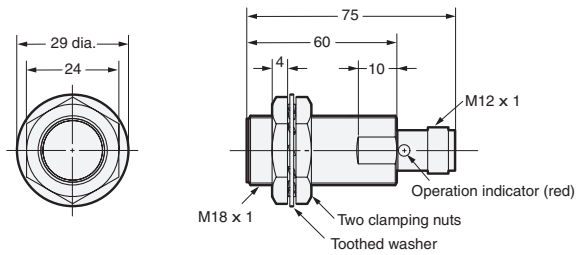


### E2E2-X5Y□-M4

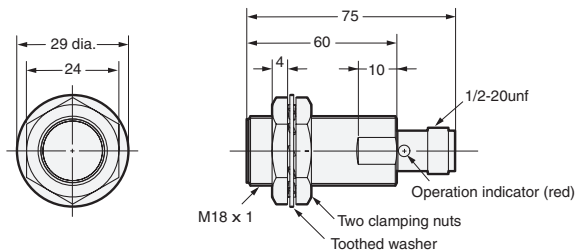


## Connector Models (Unshielded)


### E2E2-X5MC□-M1/B□-M1

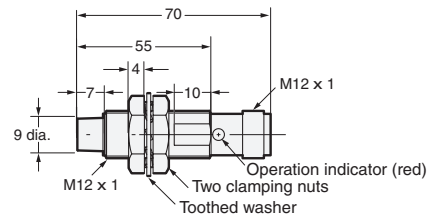


### E2E2-X5MY□-M4

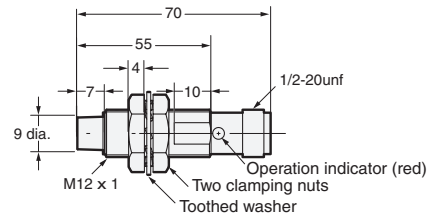

### E2E2-X10MC□-M1/B□-M1

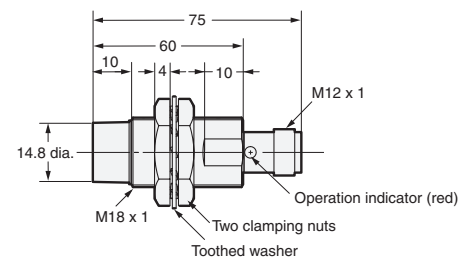


### E2E2-X10MY□-M4

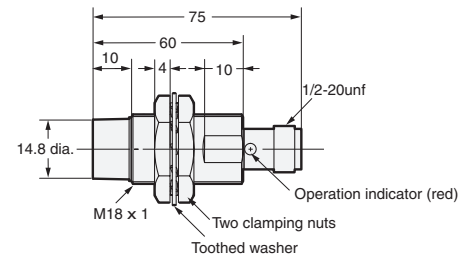


Connector Models  
(Shielded)

E2E2-X10C□-M1/B□-M1

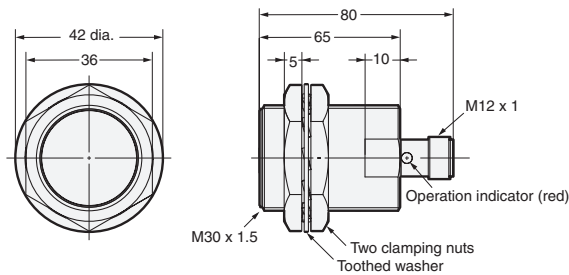


Connector Models  
(Unshielded)


E2E2-X18MC□-M1/B□-M1

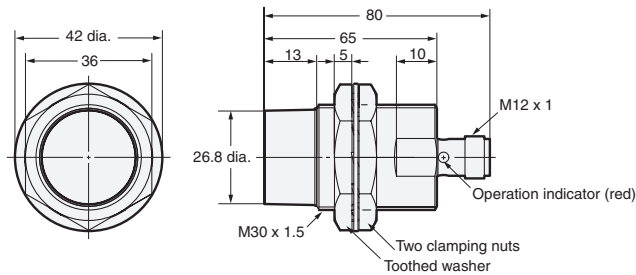


E2E2-X10Y□-M4

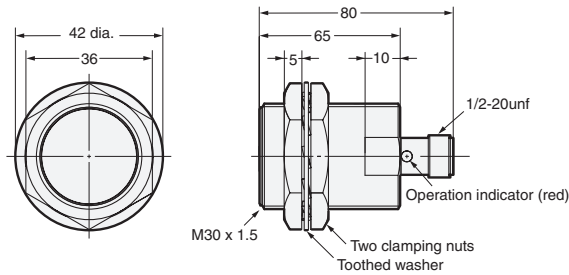

E2E2-X18MY□-M4

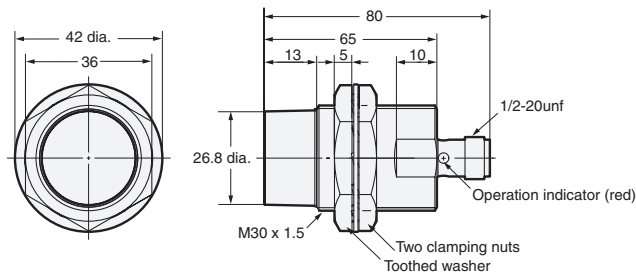

Mounting Holes



Dimensions	M12	M18	M30
F (mm)	12.5 <sup>+0.5</sup> <sub>0</sub> dia.	18.5 <sup>+0.5</sup> <sub>0</sub> dia.	30.5 <sup>+0.5</sup> <sub>0</sub> dia.



**WARRANTY**

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

**LIMITATIONS OF LIABILITY**

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

**SUITABILITY FOR USE**

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

**PERFORMANCE DATA**

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

**CHANGE IN SPECIFICATIONS**

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

**DIMENSIONS AND WEIGHTS**

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

**ERRORS AND OMISSIONS**

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

**PROGRAMMABLE PRODUCTS**

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. D058-E1-04

**In the interest of product improvement, specifications are subject to change without notice.**

**OMRON Corporation**

**Industrial Automation Company**

**Sensing Devices Division H.Q.**

**Industrial Sensors Division**

Shiokoji Horikawa, Shimogyo-ku,

Kyoto, 600-8530 Japan

Tel: (81)75-344-7022/Fax: (81)75-344-7107

Printed in Japan  
0607 (0298)

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Proximity sensor, inductive, 4mm dia, shielded, 0.8mm, DC, 3-wire, NPN-NO, 2m cable	103844	E2E-CR8C1	<a href="#">Buy on EAN</a>
Proximity sensor	133304	E2E-X1C2	<a href="#">Buy on EAN</a>
Proximity sensor, inductive, 4mm dia, shielded, 0.8mm, DC, 3-wire, PNP-NO, 2m cable	133325	E2E-CR8B1	<a href="#">Buy on EAN</a>
Proximity sensor, inductive, M5, shielded, 1mm, DC, 3-wire, PNP-NO, 2m cable	133327	E2E-X1B1	<a href="#">Buy on EAN</a>
Proximity sensor, inductive, 5.4mm dia, shielded, 1mm, DC, 3-wire, PNP-NO, 2m cable	133328	E2E-C1B1	<a href="#">Buy on EAN</a>
Proximity sensor	149280	E2E-X1B2	<a href="#">Buy on EAN</a>
Proximity sensor, inductive, 5.4mm dia, shielded, 1mm, DC, 3-wire, NPN-NO, 2m cable	150350	E2E-C1C1	<a href="#">Buy on EAN</a>
Proximity sensor, inductive, M5, shielded, 1mm, DC, 3-wire, NPN-NO, 2m cable	157043	E2E-X1C1	<a href="#">Buy on EAN</a>
Proximity sensor, inductive, 4mm dia, shielded, 0.8mm, DC, 3-wire, PNP-NO, M8 connector	183173	E2E-CR8B1-M5	<a href="#">Buy on EAN</a>
Proximity sensor, inductive, M5, shielded, 1mm, DC, 3-wire, PNP-NO, M8 connector (3 pin)	183177	E2E-X1B1-M5	<a href="#">Buy on EAN</a>
Proximity sensor, inductive, M5, shielded, 1mm, DC, 3-wire, NPN-NO, M8 connector (3 pin)	183178	E2E-X1C1-M5	<a href="#">Buy on EAN</a>
Proximity sensor, inductive, M5, shielded, 1mm, DC, 3-wire, PNP-NC, M8 connector	183179	E2E-X1B2-M5	<a href="#">Buy on EAN</a>
Proximity Sensor, Long 3h NoEnr M12 PNP NO 5mm M12	232967	E2E2-X5MB1-M1	<a href="#">Buy on EAN</a>
Proximity Sensor, Long 3h Enr M12 PNP NO 2mm connector M12	232969	E2E2-X2B1-M1	<a href="#">Buy on EAN</a>

Proximity Sensor, Long 3h Enr M18 PNP NO 5mm M12	232973	E2E2-X5B1-M1	<a href="#">Buy on EAN</a>
Proximity Sensor, Long 3h NoEnr 5mm NPN M12 M12 NA	232997	E2E2-X5MC1-M1	<a href="#">Buy on EAN</a>
Proximity Sensor, Long 3h Enr 2mm NPN M12 M12 NA	232999	E2E2-X2C1-M1	<a href="#">Buy on EAN</a>
Proximity Sensor, Long 3h NoEnr 10mm M18 M12 NPN NA	233001	E2E2-X10MC1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Short NoEnr 5mm M12 NA Cable 2m	238415	E2E-X5MY1 2M	<a href="#">Buy on EAN</a>
Proximity sensor, Short 3h Enr cc 5mm NPN M18 M12 NA	238427	E2E-X5E1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Short Enr 2mm M12 M12 NA	238432	E2E-X2Y1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Short Enr NA M12 M18 5mm	238434	E2E-X5Y1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Short NoEnr NA M12 M12 5mm	238438	E2E-X5MY1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h NoEnr Short 10mm M18 M12 NA	238440	E2E-X10MY1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, Short 3h Enr cc M18 PNP NO 5mm M12	238445	E2E-X5F1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, 3h cc NoEnr 10mm M18 M12 PNP NA	238450	E2E-X10MF1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc M12 NA Enr 3mm Cable 5m	238460	E2E-X3D1-N 5M	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc Enr 2mm M8 M12 NA	238529	E2E-X2D1-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc NoEnr 4mm M8 M12 NA	238531	E2E-X4MD1-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc Enr 3mm M12 M12 NA	238539	E2E-X3D1-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc Enr 3mm NC M12 M12	238540	E2E-X3D2-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc Enr 7mm M18 M12 NA	238541	E2E-X7D1-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Enr Short 10mm M30 M12 NA	238543	E2E-X10D1-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc NoEnr 8mm M12 M12 NA	238545	E2E-X8MD1-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc NoEnr 14mm M18 M12 NA	238547	E2E-X14MD1-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h NA cc Enr 2mm M8 connector M8	238563	E2E-X2D1-M3G	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc Enr NC 2mm M8 M12	238564	E2E-X2D2-M3G	<a href="#">Buy on EAN</a>
Proximity sensor, 2h NoEnr 4mm NC M8 M12	238532	E2E-X4MD2-M1G	<a href="#">Buy on EAN</a>

Proximity Sensor, Long 3h Enr 5mm NPN M18 M12 NA	233003	E2E2-X5C1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, Larto 3h Enr 10mm M30 M12 NPN NA	233007	E2E2-X10C1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, Short 3h cc Enr 10mm M30 M12 NPN NA	238428	E2E-X10E1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, 3h cc NoEnr 5mm NPN M12 M12 NA	238429	E2E-X5ME1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, Short 3h Enr cc M8 PNP 1.5mm M12	238444	E2E-X1R5F1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h NoEnr Short 18mm M30 M12 NA	238442	E2E-X18MY1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, 3h cc NoEnr 5mm PNP M12 M12	238449	E2E-X5MF1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, Short 3h Enr cc 1.5mm M8 connector M8 PNP NA	238573	E2E-X1R5F1-M3	<a href="#">Buy on EAN</a>
Proximity Sensor, Long 3h NoEnr 10mm M18 M12 PNP NA	232971	E2E2-X10MB1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc NoEnr 8mm M12 M12 NC	238546	E2E-X8MD2-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc Enr 7mm M18 M12 NC	238542	E2E-X7D2-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Short Enr NC M12 M18 5mm	238435	E2E-X5Y2-M1	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc Enr 7mm M18 M12 NA	238509	E2E-X7D1S-M1	<a href="#">Buy on EAN</a>
Proximity Sensor, Long 2h Enr 5mm NA CA M12 connector 1 / 2-20unf	233057	E2E2-X5Y1-M4	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Short Enr NC 2mm M12 M12	238433	E2E-X2Y2-M1	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Short NoEnr NC M12 M12 5mm	238439	E2E-X5MY2-M1	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Enr Short 10mm M30 M12 NC	238437	E2E-X10Y2-M1	<a href="#">Buy on EAN</a>
Proximity sensor, ca 2h Enr Short 10mm M30 M12 NA	238436	E2E-X10Y1-M1	<a href="#">Buy on EAN</a>
Proximity sensor, 2h cc Enr 3mm M12 M12 NA	238474	E2E-X3D1-M1	<a href="#">Buy on EAN</a>
Proximity sensor	183175	E2E-CR8B2-M5	<a href="#">Buy on EAN</a>
Proximity sensor, Short 2h cc NoEnr 20mm M30 M12 NA	238549	E2E-X20MD1-M1G	<a href="#">Buy on EAN</a>
Proximity sensor, Larto 3h Enr 10mm M30 M12 PNP NA	232977	E2E2-X10B1-M1	<a href="#">Buy on EAN</a>
	133303	E2E-CR8C2	<a href="#">Buy on EAN</a>
Proximity sensor, 2h cc Enr NC 2mm M8 M12	238530	E2E-X2D2-M1G	<a href="#">Buy on EAN</a>
	133326	E2E-CR8B2	<a href="#">Buy on EAN</a>

Proximity sensor, inductive

183180 E2E-X1C2-M5

[Buy on EAN](#)