



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

JX

Compact & Complete


- V/f controlled inverter
- Side by side mounting
- Built-in EMC filter
- Built-in RS-485 Modbus
- Overload detection function (150% during 60s)
- PID
- Micro-surge voltage suppression
- Automatic energy saving
- Emergency shut-off
- Second motor setting
- Auto carrier-frequency reduction
- PTC thermistor input
- Cooling fan switch control
- PC configuration tool: CX-Drive
- CE, UL, cUL, RoHS

Ratings

- 200 V Class single-phase 0.2 to 2.2 kW
- 200 V Class three-phase 0.2 to 7.5 kW
- 400 V Class three-phase 0.4 to 7.5 kW



System configuration

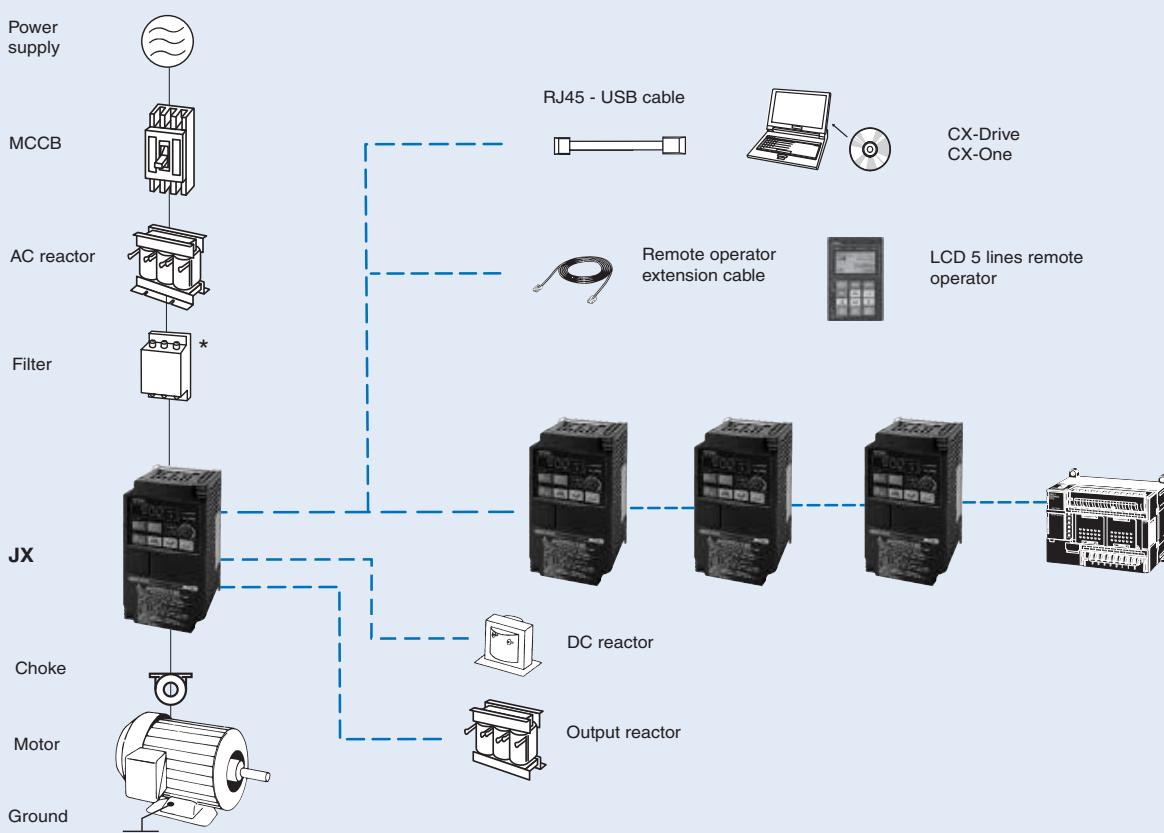

* Only needed for 3 phase 200 V or to comply C1 on 3 phase 400 V models

Specifications

Type designation

3 G 3 J X - A B 0 0 2 - E F

JX series

A: Standard specs

Voltage:
B: Single-phase 200 VAC
2: Three-phase 200 VAC
4: Three-phase 400 VAC

F: Built-in EMC Filter

E: Europe standard

Max. applicable motor output
002: 0,2 kW
075: 7,5 kW

200 V class

Single-phase: 3G3JX□		AB002	AB004	AB007	AB015	AB022	-	-	-
Three-phase: 3G3JX□		A2002	A2004	A2007	A2015	A2022	A2037	A2055	A2075
Motor kW ¹	Applicable motor capacity	0.2	0.4	0.75	1.5	2.2	3.7	5.5	7.5
Output characteristics	Inverter capacity kVA	200 V	0.4	0.9	1.3	2.4	3.4	5.5	8.3
		240 V	0.5	1.0	1.6	2.9	4.1	6.6	11.0
Power supply	Rated output current (A)	1.4	2.6	4.0	7.1	10.0	15.9	24.0	32.0
	Max. output voltage	Proportional to input voltage: 0...240 V							
	Max. output frequency	400 Hz							
	Rated input voltage and frequency	Single-phase 200...240 V 50/60 Hz 3-phase 200...240 V 50/60 Hz							
Rated input current (A) Three-phase 200 V		1.8	3.4	5.2	9.3	13.0	20.0	30.0	40.0
Rated input current (A) Single-phase 200 V		3.1	5.8	9.0	16.0	22.5	-	-	-
Allowable voltage fluctuation		-15%...+10%							
Allowable frequency fluctuation		+5%							
Built-in filter		EMC filter (C1 single phase)							
Braking torque	At short-time deceleration	Approx. 50%	50% for 3-phase 20 to 40% for 1-phase	Approx 20% to 40%	Approx 20%	Approx 20%	-	-	-
	At capacitor feedback								
Cooling method		Self cooling		Forced-air-cooling					

¹ Based on a standard 3-Phase standard motor.

400 V class

Three-phase: 3G3JX□		A4004	A4007	A4015	A4022	A4040	A4055	A4075	
Applicable motor capacity									
Motor kW ¹	Applicable motor capacity	0.4	0.75	1.5	2.2	4.0	5.5	7.5	
Output characteristics	Inverter capacity kVA	380 V	0.9	1.6	2.5	3.6	5.6	8.5	
		480 V	1.2	2.0	3.1	4.5	7.1	10.8	
Power supply	Rated output current (A)	1.5	2.5	3.8	5.5	8.6	13.0	16.0	
	Max. output voltage	Proportional to input voltage: 0...480 V							
	Max. output frequency	400 Hz							
	Rated input voltage and frequency	3-phase 380...480 V 50/60 Hz							
Rated input current (A)		2.0	3.3	5.0	7.0	11.0	16.5	20.0	
Allowable voltage fluctuation		-15%...+10%							
Allowable frequency fluctuation		+5%							
Built-in filter		EMC filter C2 class							
Braking torque	At short-time deceleration	Approx. 50%	50% for 3-phase 20 to 40% for 1-phase	Approx 20% to 40%	Approx 20%	-	-	-	-
	At capacitor feedback								
Cooling method		Self cooling		Forced-air-cooling					

¹ Based on a standard 3-Phase standard motor.

Specifications

Common specifications

Model number 3G3JX□		Specifications
Control functions	Control methods	Phase-to-phase sinusoidal modulation PWM (V/f)
	Output frequency range	0.5..400 Hz
	Frequency precision	Digital set value: $\pm 0.01\%$ of the max. frequency Analogue set value: $\pm 0.4\%$ of the max. frequency ($25 \pm 10^\circ\text{C}$)
	Resolution of frequency set value	Digital set value: 0.1 Hz Analogue set value: 1/1000 of maximum frequency
	Resolution of output frequency	0.1 Hz
	Overload capability	150% rated output current for one minute
	Frequency set value	0 to 10 VDC (10 kΩ), 4 to 20 mA (250 Ω), frequency setting volume (selectable), RS485 Modbus
	V/f Characteristics	Constant/ reduced torque
Functionality	Inputs signals	FW (forward), RV (reverse), CF1 to CF4 (multi-step speed), JG (jogging), DB (external DC injection braking), SET (2nd function), 2CH (2-step acceleration/deceleration), FRS (free run), EXT (external trip), USP (USP function), SFT (soft lock), AT (analog current input function selection), RS (reset), PTC (thermistor input), STA (3-wire startup), STP (3-wire stop), F/R (3-wire forward/reverse), PID (PID selection), PIDC (PID integral reset), UP (UP of UP/DWN function), DWN (DWN of UP/DWN function), UDC (data clear of UP/DWN function), OPE (forced OPE mode), ADD (frequency addition), F-TM (forced terminal block), RDY (operation ready), SP-SET (special setting), EMR (emergency shutoff)
	Output signals	RUN (signal during operation), FA1 (frequency arrival signal 1), FA2 (frequency arrival signal 2), OL (overload warning signal), OD (PID excess deviation signal), AL (alarm signal), DC (analog input disconnection detection signal), FBV (PID FB status output), NDc (network error), LOG (logical operation result), ODC (communication option disconnected), LOC (light load signal)
	Standard functions	AVR function, V/f characteristic selection, upper/lower limit, 16-step speeds, starting frequency adjustment, jogging operation, carrier frequency adjustment, PID control, frequency jump, analog gain/bias adjustment, S-shape acceleration/deceleration, electronic thermal characteristics/level adjustment, retry function, simplified torque boost, trip monitor, soft lock function, frequency conversion display, USP function, 2nd control function, motor rotation speed UP/DOWN, overcurrent suppression function
	Analogue inputs	2 analogue inputs 0 to 10 V (20 kΩ), 4 to 20 mA (250 Ω)
	Accel/Decel times	0.01 to 3000 s (line/curve selection), 2nd accel/decel setting available
	Display	Status indicator LED's Run, Program, Power, Alarm, Power, Hz, Amps, Volume Led indicator Digital operator: Available to monitor frequency reference, output current, output frequency
Protection functions	Motor overload protection	Electronic Thermal overload relay and PTC thermistor input
	Instantaneous overcurrent	180% of rated current
	Overload	150% for 1 minute
	Oversvoltage	790 V for 400 V type and 395 for 200 V type
	Momentary power loss	Following items are selectable: Alarm, 0 Hz start, frequency output at interruption, maximum frequency
	Cooling fin overheat	Temperature monitor and error detection
	Stall prevention level	Selectable level applicable only at constant speed or during acceleration and constant speed
	Ground fault	Detected at power-on
Ambient conditions	Power charge indication	On when power is supplied to the control part
	Degree of protection	IP20
	Ambient humidity	90% RH or less (without condensation)
	Storage temperature	-20°C..+65 °C (short-term temperature during transportation)
	Ambient temperature	-10°C to 50°C (Both the carrier frequency and output current need to be reduced at over 40°C.)
	Installation	Indoor (no corrosive gas, dust, etc.)
Installation height		Max. 1000 m
Vibration		5.9 m/s ² (0.6 G), 10 to 55 Hz (Complies with the test method specified in JIS C0040 (1999).)

Dimensions

IP 20 type 0.2 to 7.5 kW

Figure 1


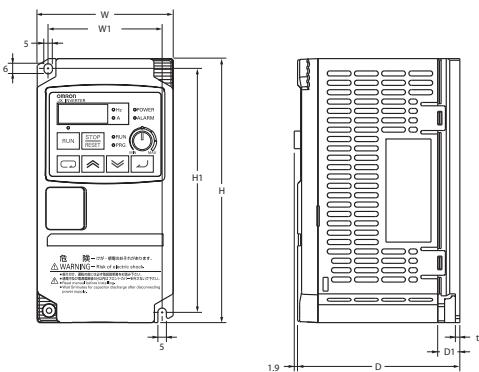



Figure 2

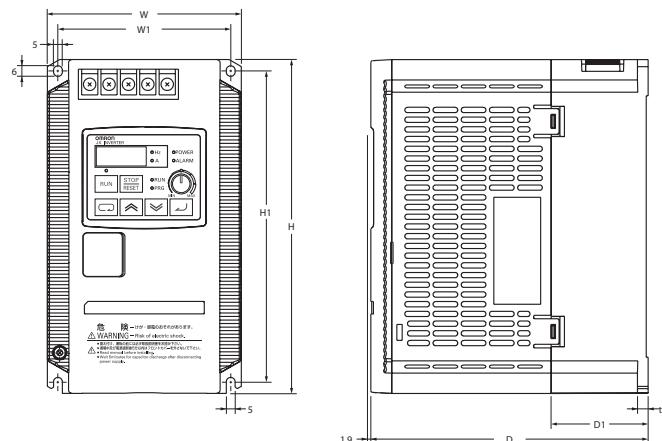


Voltage class	Max. applicable motor output kW	Inverter model 3G3JX□	Figure	Dimensions in mm							
				W1	H1	W	H	D	t1	D1	Weight
Single-phase 200 V	0.2	AB002	1	67	143	80	155	95.5	2.6	13	0.8
	0.4	AB004	1					109.5		27	0.9
	0.75	AB007	2					130.5		28	1.5
	1.5	AB015	2					157.5	6	55	2.3
	2.2	AB022	2								2.4
Three-phase 200 V	0.2	A2002	1	67	143	80	155	95.5	2.6	13	0.8
	0.4	A2004	1					109.5		27	0.9
	0.75	A2007	1					132.5		50	1.1
	1.5	A2015	2					157.5	6	55	2.2
	2.2	A2022	2	98	176	110	189		2.6		2.4
	3.7	A2037	2								
	5.5	A2055	2					167.5		77.5	4.2
	7.5	A2075	2								
Three-phase 400 V	0.4	A4004	2	98	176	110	189	130.5	2.6	28	1.5
	0.75	A4007	2								2.3
	1.5	A4015	2					157.5	6	55	2.4
	2.2	A4022	2								
	4.0	A4040	2	164	235	180	250	167.5	1.6	77.5	4.2
	5.5	A4055	2								
	7.5	A4075	2								

Rasmi footprint Filters


Filter only needed by the 1-phase 200 V or 3-phase 400 V to comply with C1 EMC class.

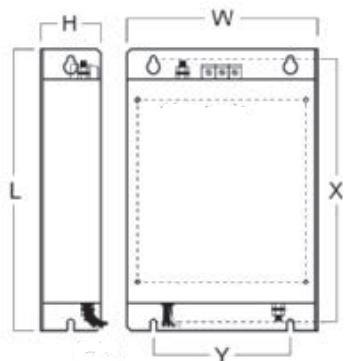


Rasmi model	Dimensions						Weight kg	
	W	H	L	X	Y	M		
1x200 V	AX-FIJ1006-RE	81	40	193	183	57	M4	0.5
	AX-FIJ1010-RE	112	47	226	216	88	M4	0.6
	AX-FIJ1026-RE	112	47	226	216	88	M4	0.8
3x200 V	AX-FIJ2006-RE	81	50	193	183	57	M4	1.0
	AX-FIJ2020-RE	112	50	226	216	88	M4	1.3
	AX-FIJ2040-RE	182	55	289	279	150	M5	2.3
3x400 V	AX-FIJ3005-RE	112	45	226	216	88	M4	0.9
	AX-FIJ3011-RE	112	45	226	216	88	M4	1.1
	AX-FIJ3020-RE	182	45	289	279	150	M4	1.7

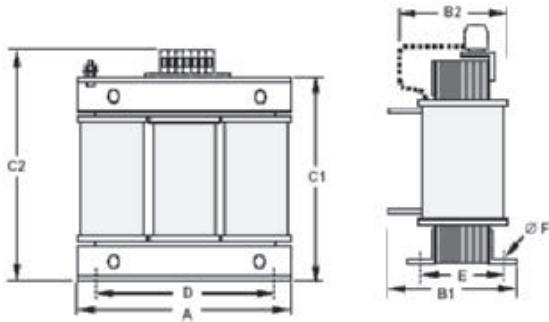Input AC Reactor


Voltage	Reference	Dimensions						Weight kg
		A	B2	C2	D	E	F	
200 V	AX-RAI02800080-DE	120	70	120	80	52	5.5	1.78
	AX-RAI008800175-DE	120	80	120	80	62	5.5	2.35
	AX-RAI003500335-DE	180	85	190	140	55	6	5.5
400 V	AX-RAI07700042-DE	120	70	120	80	52	5.5	1.78
	AX-RAI03500090-DE	120	80	120	80	62	5.5	2.35
	AX-RAI01300170-DE	120	80	120	80	62	5.5	2.50

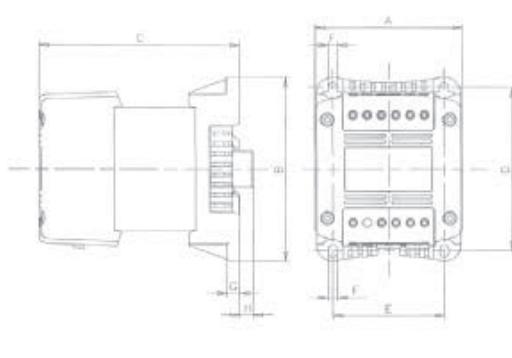DC Reactor

Voltage	Reference	Dimensions								Weight kg	
		A	B	C	D	E	F	G	H		
200 V	AX-RC21400016-DE	84	113	96	101	66	5	7.5	2	1.22	
	AX-RC10700032-DE			105						1.60	
	AX-RC06750061-DE			116						1.95	
	AX-RC03510093-DE	108	135	124	120	82	6.5	9.5	9.5	3.20	
	AX-RC02510138-DE	120	152	136	135	94	7		9.5	5.20	
	AX-RC01600223-DE			146						6.00	
	AX-RC01110309-DE			AX-RC00840437-DE						1.22	
400 V	AX-RC43000020-DE	84	113	96	101	66	5	7.5	2	1.60	
	AX-RC27000030-DE			105						1.95	
	AX-RC14000047-DE			116						2.20	
	AX-RC10100069-DE	108	135	133	120	82	6.5	9.5	9.5	3.70	
	AX-RC06400116-DE			136						5.20	
	AX-RC04410167-DE			146						6.00	

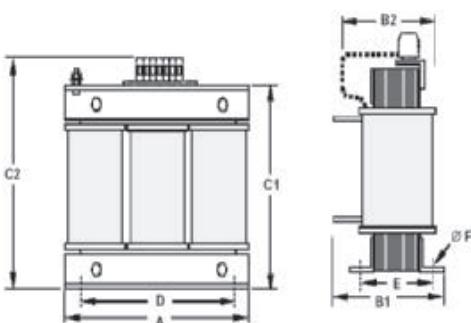Output AC Reactor


Voltage	Reference	Dimensions						Weight kg
		A	B2	C2	D	E	F	
200 V	AX-RAO11500026-DE	120	70	120	80	52	5.5	1.78
	AX-RAO07600042-DE	120	70	120	80	52	5.5	1.78
	AX-RAO04100075-DE	120	80	120	80	62	5.5	2.35
	AX-RAO03000105-DE	120	80	120	80	62	5.5	2.35
	AX-RAO01830180-DE	180	85	190	140	55	6	5.5
	AX-RAO01150220-DE	180	85	190	140	55	6	5.5
	AX-RAO00950320-DE	180	85	205	140	55	6	6.5
400 V	AX-RAO16300038-DE	120	70	120	80	52	5.5	1.78
	AX-RAO11800053-DE	120	80	120	80	52	5.5	2.35
	AX-RAO07300080-DE	120	80	120	80	62	5.5	2.35
	AX-RAO04600110-DE	180	85	190	140	55	6	5.5
	AX-RAO03600160-DE	180	85	205	140	55	6	6.5

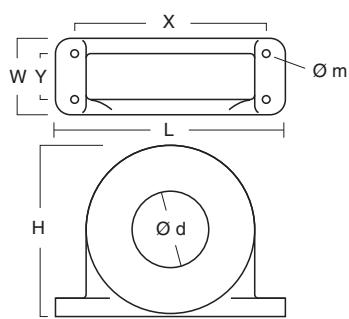Chokes

Reference	D diameter	Motor kW	Dimensions						Weight kg
			L	W	H	X	Y	m	
AX-FER2102-RE	21	< 2.2	85	22	46	70	-	5	0.1
AX-FER2515-RE	25	< 15	105	25	62	90	-	5	0.2

Installation

Standard connections

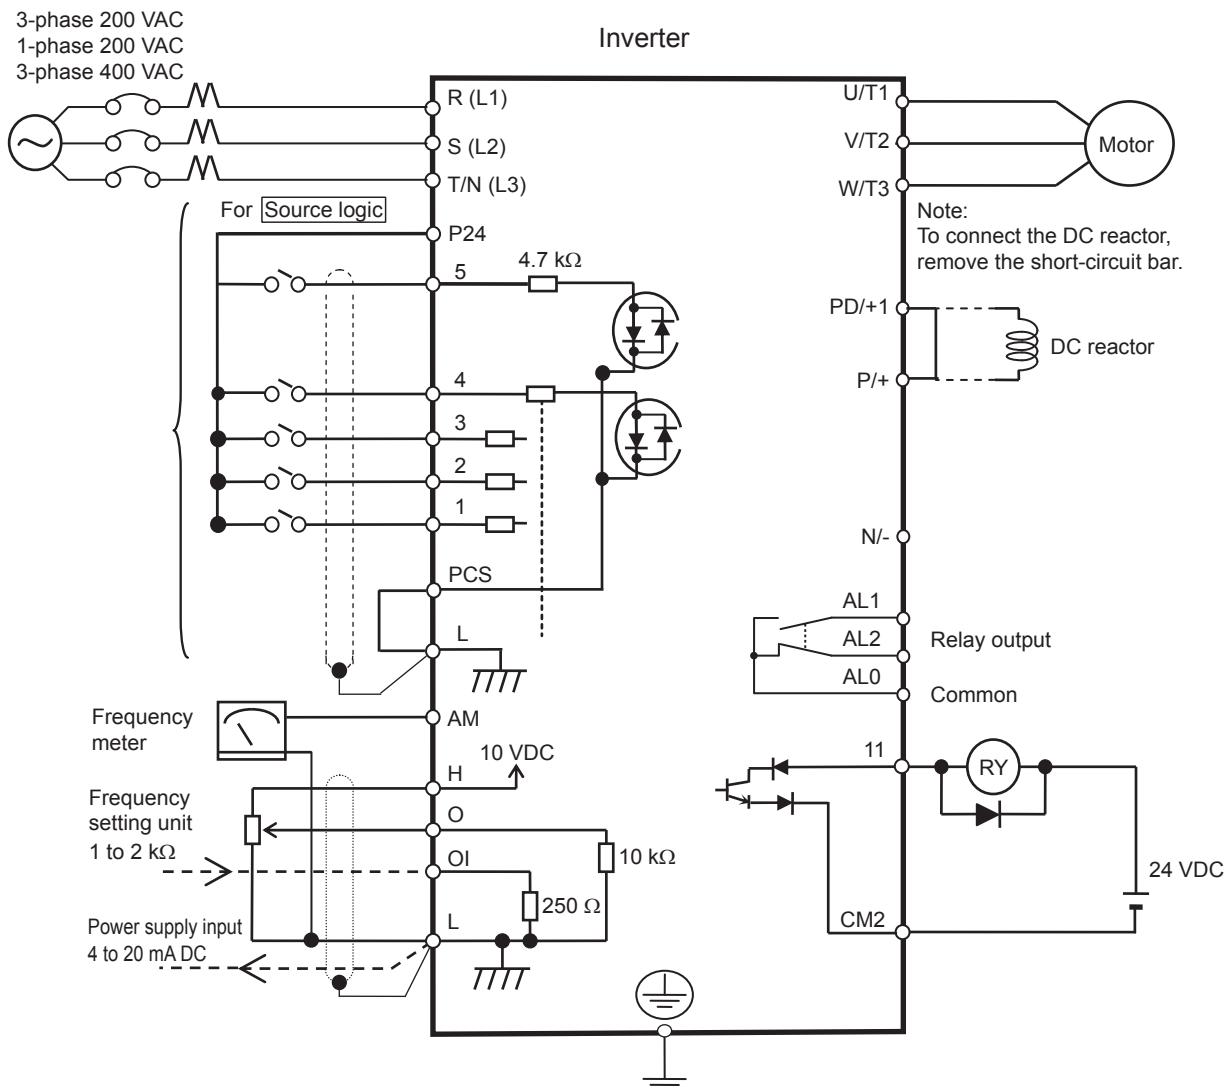


Terminal Block Specifications


Terminal	Name	Function (signal level)
R/L1, S/L2, T/N/L3	Main circuit power supply input	Used to connect line power to the drive. Drives with single-phase 200 V input power use only terminals R/L1 and N (T/L3), terminal S/L2 is not available for these units
U/T1, V/T2, W/T3	Inverter output	Used to connect the motor
PD/+1, P/+	External DC reactor terminal	Normally connected by the short-circuit bar. Remove the short-circuit bar between +1 and P/+2 when a DC reactor is connected.
P/+, N/-	DC bus terminal	-
⊕	Grounding	For grounding (grounding should conform to the local grounding code.)

Control Circuit


Type	No.	Signal name	Function	Signal level
Digital input signals	PCS	Input power supply	External power supply terminal for input signal (input) ...At sink logic Internal power supply output terminal for input signal (output) ...At source logic	24 VDC ±10%
	P24	Internal 24 VDC	24 VDC internal power supply	24 VDC±10% 100 mA
	1	Multi-function Input selection 1	Factory setting: Forward/ Stop	
	2	Multi-function Input selection 2	Factory setting: Reverse/ Stop	
	3	Multi-function Input selection 3	Factory setting: Fault reset	
	4	Multi-function Input selection 4	Factory setting: Emergency stop fault	
	5	Multi-function Input selection 5	Factory setting: Multi-step speed reference 1	
Analog input signal	L	Multi-function Input selection common	--	--
	H	Frequency reference power supply	10 VDC 10 mA max	
	O	Voltage frequency reference signal	0 to 10 VDC (10 kΩ)	
	OI	Current frequency reference signal	4 to 20 mA (250 Ω)	
Digital output signals	L	Frequency reference common	--	
	AL2	NC output	Factory default relay settings Under normal operation: AL2-AL0 Closed Under abnormal operation or power shutdown: AL1-AL0 Open	250 VAC 2.5 A 30 VDC 3 A
	AL1	NO output		250 VAC 1 A 30 VDC 1 A
	AL0	Relay Output common		
	11	Multi-function output terminal	Factory setting: Frequency arrival signal at a constant speed	27 VDC 50 mA max
Monitor Signal	CM2	Output signal common	--	
	AM	Analog frequency monitor/Analog output current monitor	Factory setting: Analog frequency monitor	0 to 10 VDC 1 mA

Side by side mounting

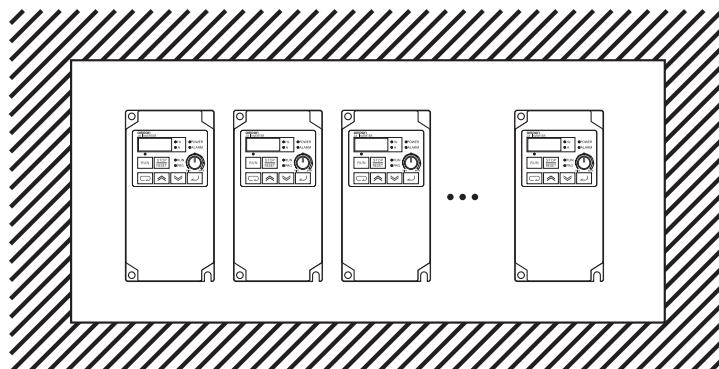

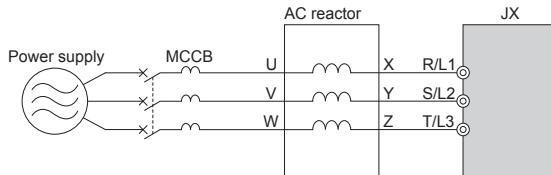Input AC Reactor

3 phase 200 V class				400 V class			
Max. applicable motor output kW	Reference	Current value A	Inductance mH	Max. applicable motor output kW	Reference	Current value A	Inductance mH
0.1 to 1.5	AX-RAI02800080-DE	8.0	2.8	0.4 to 1.5	AX-RAI07700042-DE	4.2	7.7
2.2 to 3.7	AX-RAI00880175-DE	17.5	0.88	2.2 to 4.0	AX-RAI03500090-DE	9.0	3.5
5.5 to 7.5	AX-RAI00350335-DE	33.5	0.35	5.5 to 7.5	AX-RAI01300170-DE	17.0	1.3

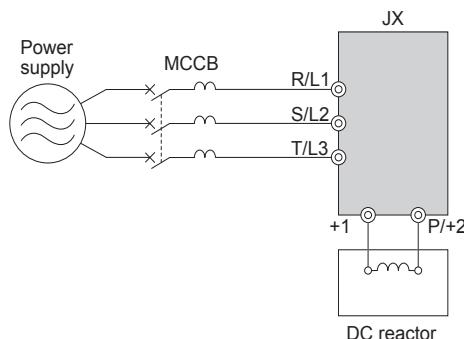
DC Reactor

200 V class				400 V class			
Max. applicable motor output kW	Reference	Current value A	Inductance mH	Max. applicable motor output kW	Reference	Current value A	Inductance mH
0.2	AX-RC21400016-DE	1.6	21.4	-	-	-	-
0.4	AX-RC10700032-DE	3.2	10.7	0.4	AX-RC43000020-DE	2.0	43.0
0.7	AX-RC06750061-DE	6.1	6.75	0.7	AX-RC27000030-DE	3.0	27.0
1.5	AX-RC03510093-DE	9.3	3.51	1.5	AX-RC14000047-DE	4.7	14.0
2.2	AX-RC02510138-DE	13.8	2.51	2.2	AX-RC10100069-DE	6.9	10.1
3.7	AX-RC01600223-DE	22.3	1.60	4.0	AX-RC06400116-DE	11.6	6.40
5.5	AX-RC01110309-DE	30.9	1.11	5.5	AX-RC04410167-DE	16.7	4.41
7.5	AX-RC00840437-DE	43.7	0.84	7.5	AX-RC03350219-DE	21.9	3.35

Output AC Reactor

200 V class				400 V class			
Max. applicable motor output kW	Reference	Current value A	Inductance mH	Max. applicable motor output kW	Reference	Current value A	Inductance mH
0.1 to 0.4	AX-RAO11500026-DE	2.6	11.50	0.4 to 1.5	AX-RAO16300038-DE	3.8	16.30
0.75	AX-RAO07600042-DE	4.2	7.60	2.2	AX-RAO11800053-DE	5.3	11.80
1.5	AX-RAO04100075-DE	7.5	4.10	4.0	AX-RAO07300080-DE	8.0	7.30
2.2	AX-RAO03000105-DE	10.5	3.00	5.5	AX-RAO04600110-DE	11.0	4.60
3.7	AX-RAO01830160-DE	16.0	1.83	7.5	AX-RAO03600160-DE	16.0	3.60
5.5	AX-RAO01150220-DE	22.0	1.15	-			
7.5	AX-RAO00950320-DE	32.0	0.95				

Ordering information

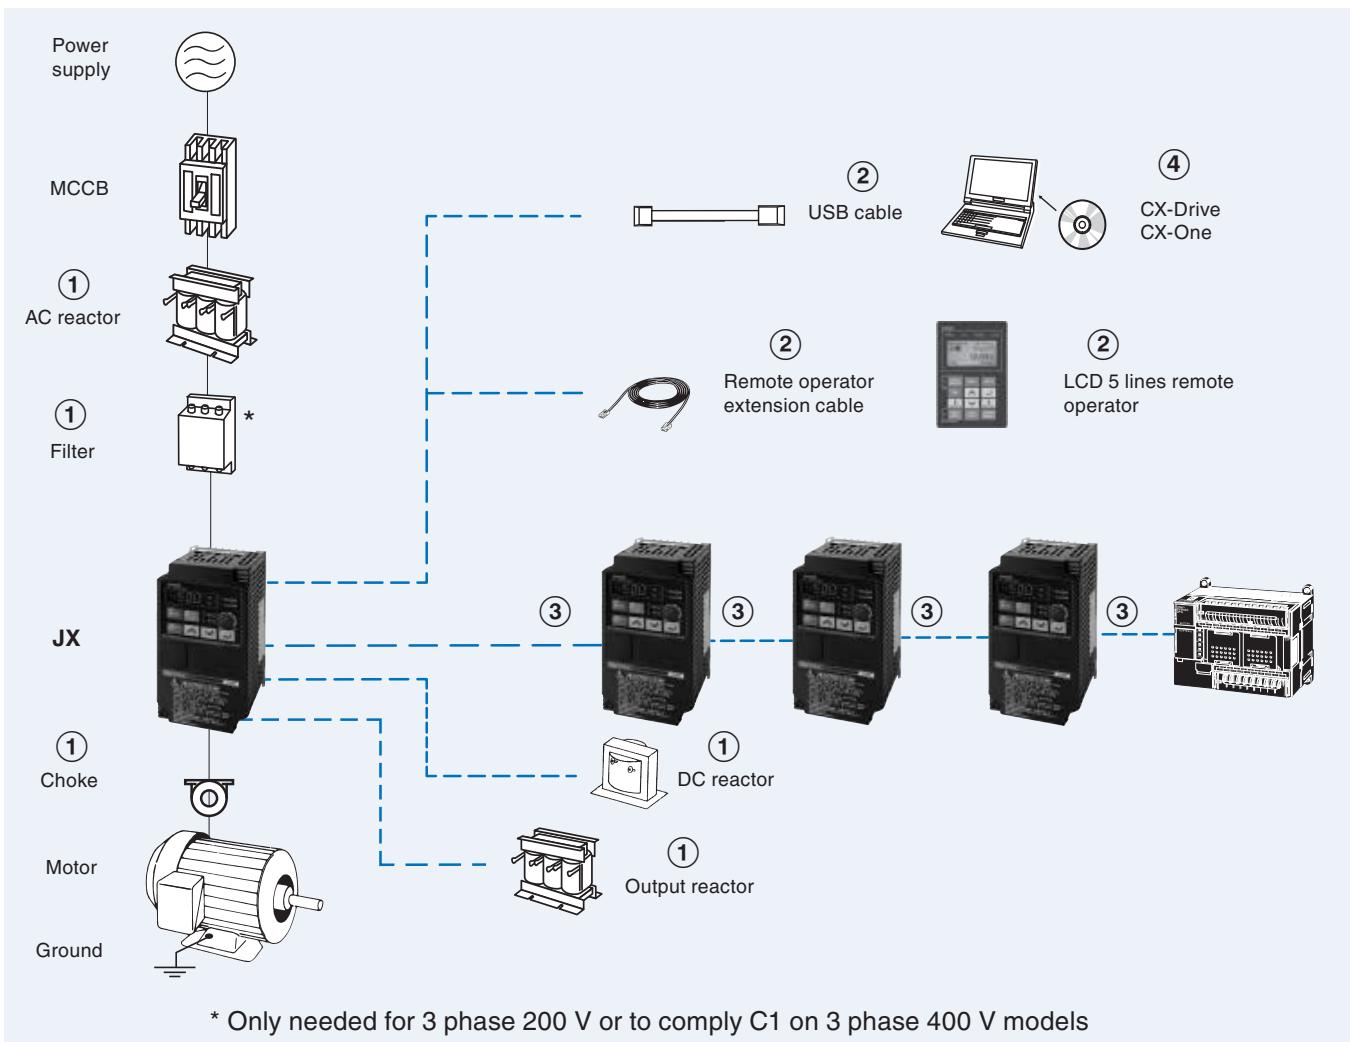

* Only needed for 3 phase 200 V or to comply C1 on 3 phase 400 V models

3G3JX

Specifications			Model
Voltage class	Max. applicable motor output kW	Rated output current (A)	Standard
Single-phase 200 V	0.2	1.4	3G3JX-AB002-EF
	0.4	2.6	3G3JX-AB004-EF
	0.75	4	3G3JX-AB007-EF
	1.5	7.1	3G3JX-AB015-EF
	2.2	10	3G3JX-AB022-EF
Three-phase 200 V	0.2	1.4	3G3JX-A2002-E
	0.4	2.6	3G3JX-A2004-E
	0.75	4	3G3JX-A2007-E
	1.5	7.1	3G3JX-A2015-E
	2.2	10	3G3JX-A2022-E
	3.7	15.9	3G3JX-A2037-E
	5.5	24	3G3JX-A2055-E
	7.5	32	3G3JX-A2075-E
Three-phase 400 V	0.4	1.5	3G3JX-A4004-EF
	0.75	2.5	3G3JX-A4007-EF
	1.5	3.8	3G3JX-A4015-EF
	2.2	5.5	3G3JX-A4022-EF
	4.0	8.6	3G3JX-A4040-EF
	5.5	13	3G3JXA4055-EF
	7.5	16	3G3JXA4075-EF

① Line filters

Inverter		Line filter Rasmı		
Voltage	Model 3G3JX-□	Reference	Rated current (A)	Weight (kg)
1-Phase 200 VAC	AB002 / AB004	AX-FIJ1006-RE	6	0.5
	AB007	AX-FIJ1010-RE	10	0.6
	AB015 / AB022	AX-FIJ1026-RE	26	0.8
3-Phase 200 VAC	A2002 / A2004 / A2007	AX-FIJ2006-RE	6	1.0
	A2015 / A2022 / A2037	AX-FIJ2020-RE	20	1.3
	A2055 / A2075	AX-FIJ2040-RE	40	2.3
3-Phase 400 VAC	A4004 / A4007 / A4015	AX-FIJ3005-RE	5	0.9
	A4022 / A4040	AX-FIJ3011-RE	11	1.1
	A4055 / A4075	AX-FIJ3020-RE	20	1.7

① Input AC Reactors

Inverter		AC Reactor
Voltage	Model 3G3JX-□	Reference
3-Phase 200 VAC	A2002 / A2004 / A2007	AX-RAI02800080-DE
	A2015 / A2022 / A2037	AX-RAI00880175-DE
	A2055 / A2075	AX-RAI00350335-DE
1-Phase 200 VAC	AB002 / AB004	Under development
	AB007	
	AB015 / AB022	
3-Phase 400 VAC	A4004 / A4007 / A4015	AX-RAI07700042-DE
	A4022 / A4040	AX-RAI03500090-DE
	A4055 / A4075	AX-RAI01300170-DE

① DC Reactors

200V single phase		200V 3-phase		400V 3-phase	
Inverter	DC Reactor	Inverter	DC Reactor	Inverter	DC Reactor
3G3JX-AB002	AX-RC10700032-DE	3G3JX-A2002	AX-RC21400016-DE	-	-
3G3JX-AB004	AX-RC06750061-DE	3G3JX-A2004	AX-RC10700032-DE	3G3JX-A4004	AX-RC43000020-DE
3G3JX-AB007	AX-RC03510093-DE	3G3JX-A2007	AX-RC06750061-DE	3G3JX-A4007	AX-RC27000030-DE
3G3JX-AB015	AX-RC02510138-DE	3G3JX-A2015	AX-RC03510093-DE	3G3JX-A4015	AX-RC14000047-DE
3G3JX-AB022	AX-RC01600223-DE	3G3JX-A2022	AX-RC02510138-DE	3G3JX-A4022	AX-RC10100069-DE
-		3G3JX-A2037	AX-RC01600223-DE	3G3JX-A4040	AX-RC06400116-DE
		3G3JX-A2055	AX-RC01110309-DE	3G3JX-A4055	AX-RC04410167-DE
		3G3JX-A2075	AX-RC00840437-DE	3G3JX-A4075	AX-RC03350219-DE

① Chokes

Model	Diameter	Description
AX-FER2102-RE	21	For 2.2 KW motors or below
AX-FER2515-RE	25	For 7.5 KW motors or below

① Output AC Reactors

Inverter		AC Reactor
Voltage	Model 3G3JX-□	Reference
200 VAC	A2001 / A2002 / A2004 AB001 / AB002 / AB004	AX-RAO11500026-DE
	A2007/AB007	AX-RAO07600042-DE
	A2015 / AB015	AX-RAO04100075-DE
	A2022 / AB022	AX-RAO03000105-DE
	A2037	AX-RAO01830160-DE
	A2055	AX-RAO01150220-DE
	A2075	AX-RAO00950320-DE
400 VAC	A4004 / A4007 / A4015	AX-RAO16300038-DE
	A4022	AX-RAO11800053-DE
	A4040	AX-RAO07300080-DE
	A4055	AX-RAO04600110-DE
	A4075	AX-RAO03600160-DE

② Accessories

Types	Model	Description	Functions
Digital operator	AX-OP05-E	LCD remote operator	5 Line LCD remote operator with copy function, cable length max. 3m.*1
	3G3AX-CAJOP300-EE	Remote operator cable	3 meters cable for connecting remote operator
	3G3AX-OP01	LED remote operator	LED remote operator, cable length max. 3m
	4X-KITMINI	Mounting kit for LED operator	Mounting kit for LED operator on panel
Accessories	3G3AX-PCACN2	USB converter / USB cable	RJ45 to USB connection cable
	USB-converterable		
	3G3AX-CTB020-EE	RJ45 T-Branch cable	T cable for RS-422 connection
	3G3AX-CTR150-EE	RJ45 Terminator resistor	Terminator resistor for RS-422 connection

*1 Please note, for 3G3JX inverters models, the operator will only display 2 lines of text.

④ Computer software

Types	Model	Description	Installation
Software	CX-Drive	Computer software	Configuration and monitoring software tool
	CX-One	Computer software	Configuration and monitoring software tool
	€Saver	Computer software	Software tool for Energy Saving calculation

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Frequency converters, JX Three Phase, 200-240VAC, 0.4kW, 2.6A, V / f control	352832	3G3JX-A2004-E	Buy on EAN
Frequency converters, JX Three Phase, 200-240VAC, 0.75kW, 4.0A, V / f control	352833	3G3JX-A2007-E	Buy on EAN
Frequency converters, JX Three Phase, 200-240VAC, 1.5kW, 7.1A, V / f control	352834	3G3JX-A2015-E	Buy on EAN
Frequency converters, JX Three Phase, 200-240VAC, 2.2kW, 10A, Control V / f	352835	3G3JX-A2022-E	Buy on EAN
Frequency converters, JX Three Phase, 200-240VAC, 3.7kW, 15.9A, V / f control	352836	3G3JX-A2037-E	Buy on EAN
Frequency converters, JX Three Phase, 380-480VAC, 0.4kW, 1.5A, V / f filter	352839	3G3JX-A4004-EF	Buy on EAN
Frequency converters, JX Three Phase, 380-480VAC, 0.75kW, 2.5A, V / f filter	352840	3G3JX-A4007-EF	Buy on EAN
Frequency converters, JX Three Phase, 380-480VAC, 1.5kW, 3.8A, V / f filter	352841	3G3JX-A4015-EF	Buy on EAN
Frequency converters, JX Three Phase, 380-480VAC, 2.2kW, 5.5A, V / f filter	352842	3G3JX-A4022-EF	Buy on EAN
Frequency converters, JX Three Phase, 380-480VAC, 4kW, 8.6A, V / f filter	352843	3G3JX-A4040-EF	Buy on EAN
Frequency converters, JX Three Phase, 380-480VAC, 5.5kW, 13.0a, Control V / f filter	352844	3G3JX-A4055-EF	Buy on EAN
Frequency converters, JX Three Phase, 380-480VAC, 7.5kW, 16.0A, V / f filter	352845	3G3JX-A4075-EF	Buy on EAN
Frequency converters, JX Single Phase, 200-240VAC, 0.25kW, 1.4A, V / f control	352846	3G3JX-AB002-E	Buy on EAN
Frequency converters, JX Single Phase, 200-240VAC, 0.25kW, 1.4A, V / f filter	352847	3G3JX-AB002-EF	Buy on EAN

Frequency converters, JX Single Phase, 200-240VAC, 0.4kW, 2.6A, V / f control	352848	3G3JX-AB004-E	Buy on EAN
Frequency converters, JX Single Phase, 200-240VAC, 0.4kW, 2.6A, V / f filter	352849	3G3JX-AB004-EF	Buy on EAN
Frequency converters, JX Single Phase, 200-240VAC, 0.75kW, 4.0A, V / f control	352850	3G3JX-AB007-E	Buy on EAN
Frequency converters, JX Single Phase, 200-240VAC, 0.75kW, 4.0A, V / f filter	352851	3G3JX-AB007-EF	Buy on EAN
Frequency converters, JX Single Phase, 200-240VAC, 1.5kW, 7.1A, V / f control	352852	3G3JX-AB015-E	Buy on EAN
Frequency converters, JX Single Phase, 200-240VAC, 1.5kW, 7.1A, V / f filter	352853	3G3JX-AB015-EF	Buy on EAN
Frequency converters, JX Single Phase, 200-240VAC, 2.2kW, 10A, Control V / f	352854	3G3JX-AB022-E	Buy on EAN
Frequency converters, JX Single Phase, 200-240VAC, 2.2kW, 10A, Control V / f filter	352855	3G3JX-AB022-EF	Buy on EAN
Drives, reactance 5,5kW 200V 22A AC output 1,15mH	319459	AX-RAO01150220-DE	Buy on EAN
Frequency converters, input filter 40A 200V three phase (JX)	318185	AXFIJ2040RE	Buy on EAN
Frequency converters, input filter 6A 200V three phase (JX)	318183	AXFIJ2006RE	Buy on EAN
Frequency converters, AC output reactance 5,3A 400V 2.2kW 11,8mH	354528	AX-RAO11800053-DE	Buy on EAN
Drives, reactance Output 400V AC 3,8A 0,4-1,5kW 16,3mH	319471	AX-RAO16300038-DE	Buy on EAN
Frequency converters, AC reactance 400V 4.2A 0,4-1,5kW 7,7mH	318997	AX-RAI07700042-DE	Buy on EAN
Drives, 400V AC reactance 5,5-7,5kW 17A 1,3mH	318999	AX-RAI01300170-DE	Buy on EAN
Drives, 400V AC reactance 2,2-4kW 9A 3,5mH	318998	AX-RAI03500090-DE	Buy on EAN
Frequency converters, AC reactance Output 200V 7.5kW 32A 0,95mH	319458	AX-RAO00950320-DE	Buy on EAN
Frequency converters, DC reactor 43mH 2A 400V	319455	AX-RC43000020-DE	Buy on EAN
Frequency converters, DC reactor 27mH 3A 400V	319454	AX-RC27000030-DE	Buy on EAN
Frequency converters, DC 200V 1.6A reactance 21,4mH	319453	AX-RC21400016-DE	Buy on EAN
Drives, 400V DC reactor 4,7a 14mH	319452	AX-RC14000047-DE	Buy on EAN
Frequency converters, DC 200V 3.2A reactance 10,7mH	319451	AX-RC10700032-DE	Buy on EAN
Frequency converters, DC 400V 6.9A reactance 10,1mH	319450	AX-RC10100069-DE	Buy on EAN

Frequency converters, DC 200V 30,9A reactance 1,11mH	319439	AX-RC01110309-DE	Buy on EAN
Frequency converters, DC 200V 43,7A reactance 0,84mH	319437	AX-RC00840437-DE	Buy on EAN
Drives, Digital Operator Extension Cable 3m	324009	3G3AX-CAJOP300-EE	Buy on EAN
JX Inverter drive, 7.5kW, 32.0A, 200VAC, 3-phase	263783	JX-A2075-E	Buy on EAN
Frequency converters, JX Three Phase, 200-240VAC, 7.5kW, 32.0A, V / f control	352838	3G3JX-A2075-E	Buy on EAN
Frequency converters, JX Three Phase, 200-240VAC, 5.5 kW, 24.0A, V / f control	352837	3G3JX-A2055-E	Buy on EAN
Frequency converters, JX Three Phase, 200-240VAC, 0.25kW, 1.4A, V / f control	352831	3G3JX-A2002-E	Buy on EAN
Drives, 200V AC reactance 0,2-1,5kW 8A 2,8mH	319000	AX-RAI02800080-DE	Buy on EAN
Drives, 200V AC reactance 2,2-4kW 17,5A 0,88mH	319001	AX-RAI00880175-DE	Buy on EAN
Drives, 200V AC reactance 5,5-7,5kW 33,5A 0,35mH	319002	AX-RAI00350335-DE	Buy on EAN
Frequency converters, DC 200V 13.8A reactance 2,51mH	319444	AX-RC02510138-DE	Buy on EAN
Frequency converters, input filter 6A 200V single phase (JX)	283806	AX-FIJ1006-RE	Buy on EAN
Drives, 200V single-phase input filter 10A (JX)	283807	AX-FIJ1010-RE	Buy on EAN
Drives, 400V three-phase input filter 5A (JX)	283809	AX-FIJ3005-RE	Buy on EAN
Frequency converters, LED Remote Operator (X series)	335480	3G3AX-OP01	Buy on EAN
Drives, EOL resistor Modbus RS422	323822	3G3AX-CTR150-EE	Buy on EAN
Drives, fork Cable RJ45	323821	3G3AX-CTB020-EE	Buy on EAN
Frequency converters, AC reactance Output 400V 7.5kW 16A 3,6mH	319464	AX-RAO03600160-DE	Buy on EAN
Drives, reactance AC 200V 1.5kW 7.5A Output 4,1mH	319465	AX-RAO04100075-DE	Buy on EAN
Frequency converters, input filter 20A 200V three phase (JX)	318184	AXFIJ2020RE	Buy on EAN
Frequency converters, DC 200V 22,3A reactance 1.6mH	319441	AX-RC01600223-DE	Buy on EAN
Frequency converters, DC 400V 21,9A reactance 3,35mH	319445	AX-RC03350219-DE	Buy on EAN
Frequency converters, DC 200V 9,3A reactance 3,51mH	319446	AX-RC03510093-DE	Buy on EAN
Frequency converters, DC 400V 16,7A reactance 4,41mH	319447	AX-RC04410167-DE	Buy on EAN

Frequency converters, DC 400V 11,6A reactance 6,4mH	319448	AX-RC06400116-DE	Buy on EAN
Frequency converters, DC 200V 6.1A reactance - 6,75mH	319449	AX-RC06750061-DE	Buy on EAN
Frequency converters, AC reactance Output 200V 3.7kW 16A 1,83mH	319460	AX-RAO01830160-DE	Buy on EAN
Frequency converters, AC output reactance 8A 400V 4kW 7,3mH	319467	AX-RAO07300080-DE	Buy on EAN
Frequency converters, input filter 11A 400V three phase (JX)	283810	AX-FIJ3011-RE	Buy on EAN
Drives, reactance AC 200V 0.75kW 4.2A Output 7,6mH	319468	AX-RAO07600042-DE	Buy on EAN
Frequency converters, AC reactance 0,4kW 200V 2.6A Output 11,5mH	319469	AX-RAO11500026-DE	Buy on EAN
Frequency converters, AC reactance Output 200V 2.2kW 10A 3mH	319463	AX-RAO03000105-DE	Buy on EAN
Drives, reactance 5,5kW 400V 11A AC output 4,6mH	319466	AX-RAO04600110-DE	Buy on EAN
Frequency converters, output D21mm Ferrite	320705	AX-FER2102-RE	Buy on EAN
Frequency converters, output D25mm Ferrite	324209	AX-FER2515-RE	Buy on EAN
Drives, Adapter operator OP01	327250	4X-KITMINI	Buy on EAN
Frequency converters, input filter 20A 400V three phase (JX)	283811	AX-FIJ3020-RE	Buy on EAN