



**Automatización Eléctrica**

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Super Manual Fiber Amplifier

# E3X-NA


*Adjuster type standard that is the culmination of true ease and simplicity*



## Features


### Self-explanatory LED bar displays of light levels

The previous manual type used the stability and incident level indicators to display the light level change, which was difficult to understand at a glance. The E3X-NA uses the LED bars to display the light level, ensuring the light level change at a glance.

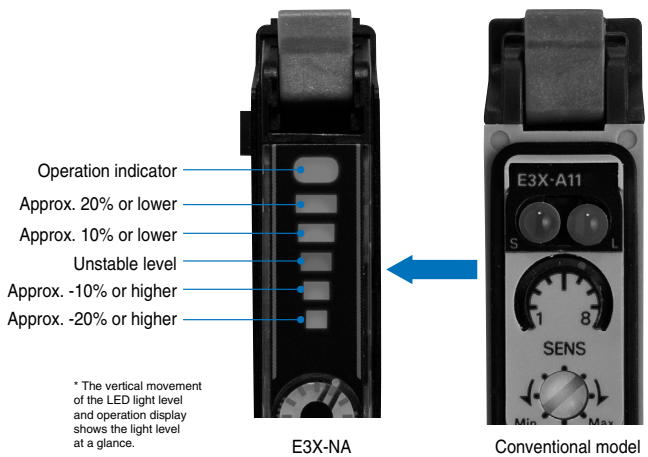

### Same "Wire-saving" Connector as E3X-DA-N


OMRON's original wiring-saving connector, which was inherited from the digital fiber amplifier E3X-DA-N, allows connection of up to 16 units.

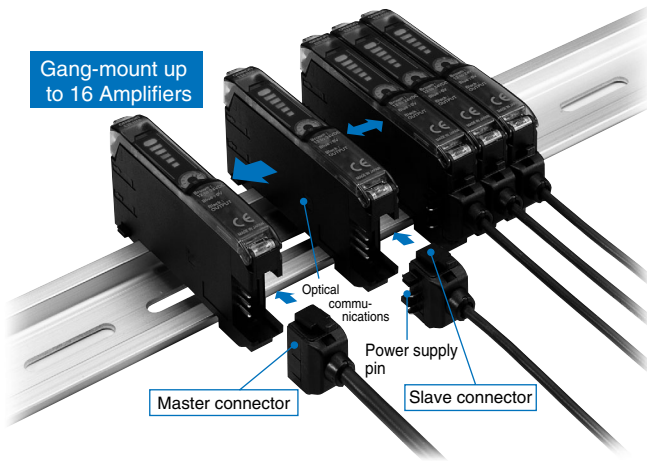

## Features


### Reduced wiring and space requirements for power lines

Example for 5 Amplifiers E3X-NA Series

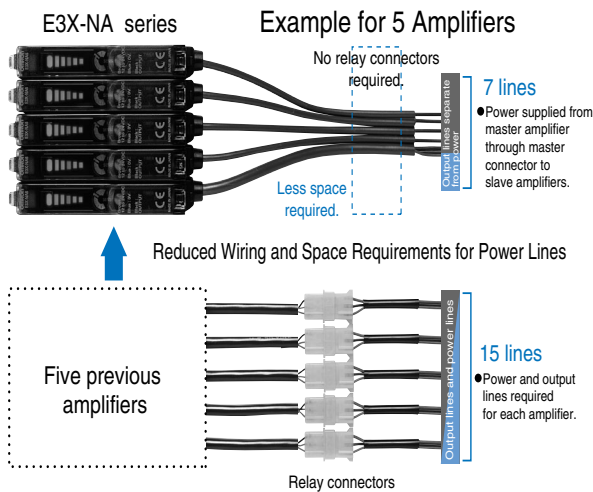

### Same Sensing Distance as Previous Long-distance Models

200 mm Reflective Models

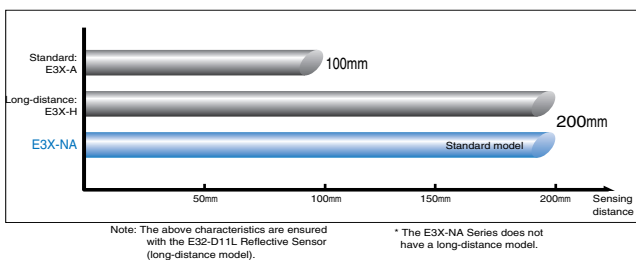

### Approximately Seven Times the Detection Accuracy

Applied Fiber: E32-T16P (screen fiber) set at 100 mm. E3X-A1 1 (previous model) Minimum detection object: 2.0 mm dia. E3X-NA 0.3 mm dia.

Applied Fiber: E32-T16 (screen fiber) set at 100 mm.


E3X-A11 (previous model) **7 times** E3X-NA

Minimum detection object: **2.0 mm dia. → 0.3 mm dia.**


### Addition of high-speed type and waterproof type to the series

### Optical Communications to Prevent Mutual Interference

Optical communication between amplifiers prevents mutual interference. Up to 5 fiber heads can be installed closely, except E3X-NA□F.

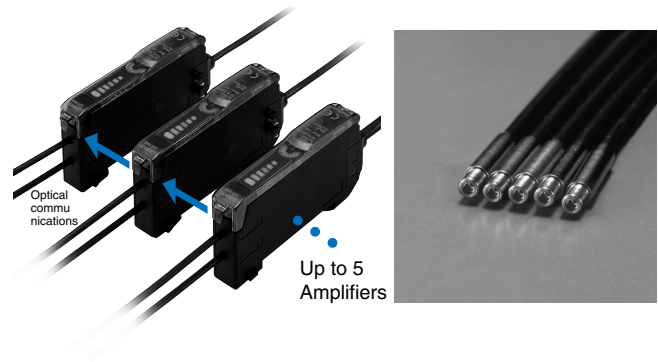



### Dimensions and Designs Inherited from the E3X-DA-N Digital Fiber Amplifier

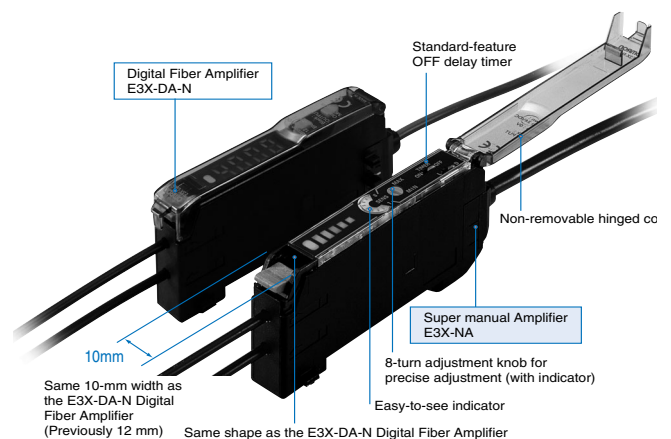



## Ordering Information

## Amplifier Units



## Pre-wired

| Item                   | Shape   | Control output | Model      |            |
|------------------------|---|----------------|------------|------------|
|                        |   |                | NPN output | PNP output |
| Standard models        |  | ON/OFF output  | E3X-NA11   | E3X-NA41   |
| High-speed detection   |   |                | E3X-NA11F  | E3X-NA41F  |
| Mark-detecting models  |   |                | E3X-NAG11  | E3X-NAG41  |
| Water-resistant models |  |                | E3X-NA11V  | E3X-NA41V  |

## Connector type

| Item                                     | Shape   | Applicable Connector<br>(order separately) |          | Control output | Model      |            |
|--|---|--|----------|----------------|------------|------------|
|  |   |  |          |                | NPN output | PNP output |
| Standard models                          |  | Master                                     | E3X-CN11 | ON/OFF output  | E3X-NA6    | E3X-NA8    |
|  |   | Slave                                      | E3X-CN12 |                |            |            |
| Water-resistant models<br>(M8 Connector) |  | XS3F-M421-40□-A<br>XS3F-M422-40□-A         |          |                |            | E3X-NA14V  |

Amplifier Units Connectors (Order Separately) Note: Stickers for Connectors are included as accessories.

| Item             | Shape   | Cable length | No. of conductors | Model    |
|------------------|---|--------------|-------------------|----------|
| Master connector |  | 2 m          | 3                 | E3X-CN11 |
| Slave connector  |  |              | 1                 | E3X-CN12 |

## Precautions for ordering the connector type

Refer to the following tables when placing an order. Basically, Amplifier Units and connectors are sold separately.



Please place an order after referring to the combination given below.

| Amplifier Units |         |         | + | Applicable Connector (order separately) |                   |
|-----------------|---------|---------|---|---|-------------------|
| Type            | NPN     | PNP     |   | Master connector                        | Slave connector   |
| Standard        | E3X-NA6 | E3X-NA8 |   | E3X-CN11 (3 wires)                      | E3X-CN12 (1 wire) |

**When Using 5 Amplifier Units**

|                           |   |   |
|---------------------------|---|---|
| Amplifier Units (5 Units) | + | 1 Master Connector + 4 Slave Connectors |
|---------------------------|---|---|



## Sensor I/O Connectors (Order separately)

| Size | Cable type     | Shape  | Cable length | Model           |
|------|----------------|--|--------------|-----------------|
| M8   | Standard cable | Straight  | 2 m          | XS3F-M421-402-A |
|      |                |  | 5 m          | XS3F-M421-405-A |
|      |                | L-shaped  | 2 m          | XS3F-M422-402-A |
|      |                |  | 5 m          | XS3F-M422-405-A |


Note: Refer to page NB-6 for details.

## Accessories (Order Separately)

## Mounting Brackets

| Shape   | Applicable type                 | Model    | Quantity |
|---|---------------------------------|----------|----------|
|  | E3X-NA□<br>E3X-NA□F<br>E3X-NAG□ | E39-L143 | 1        |
|  | E3X-NA□V                        | E39-L148 |          |

## End Plate

| Shape  | Model | Quantity |
|--|-------|----------|
|  | PFP-M | 1        |

## Rating/performance

## Amplifier Units

| Item                          | Model | Type  | Pre-wired   |  |                          |   | Connector type  |   |
|-------------------------------|-------|---|---|--|--------------------------|---|---|---|
|                               |       |   | Standard models   | High-speed de-<br>tection models   | Mark-detecting<br>models | Water-resistant<br>models                             | Standard models                                       | Water-resistant mod-<br>els (M8 Connector)            |
|                               |       |   | E3X-NA11  | E3X-NA11F  | E3X-NAG11                | E3X-NA11V   | E3X-NA6   | E3X-NA14V   |
|                               |       | NPN<br>output   | E3X-NA41  | E3X-NA41F  | E3X-NAG41                | E3X-NA41V   | E3X-NA8   | E3X-NA44V   |
| Light source (wave<br>length) |       | Red LED (680 nm)  |   |  | Green LED<br>(520 nm)    | Red LED (680 nm)                                      |   |   |
| Power supply volt-<br>age     |       | 12 to 24 VDC ±10%, ripple (p-p): 10% max.   |   |  |                          |   |   |   |
| Current consumption           |       | 35 mA max.  | 35 mA max. (at<br>power supply<br>voltage 24 VDC)                       | 35 mA max.   |                          |   |   |   |
| Control output                |       | Load current 50 mA (residual voltage 1 V max. each) Open collector output type (depends on the NPN/PNP out-<br>put format) Light-ON/Dark-ON switch selectable   |   |  |                          |   |   |   |
| Response time                 |       | Operation or re-<br>set: 200 s max. *   | Operating: 20 s<br>max. Reset: 30 s<br>max.                             | 200 s max. for operation and reset respectively (See note.)  |                          |   |   |   |
| Sensitivity adjust-<br>ment   |       | 8-turn endless adjuster (with indicator)  |   |  |                          |   |   |   |
| Protective circuits           |       | Reverse polarity<br>protection, out-<br>put short-circuit<br>protection, mutu-<br>al interference<br>prevention (opti-<br>cally synchro-<br>nized)  | Reverse polarity<br>protection, out-<br>put short-circuit<br>protection | Reverse polarity protection, output short-circuit protection, mutual interfer-<br>ence prevention (optically synchronized) |                          |   |   |   |
| Timer function                |       | OFF-delay timer: 40 ms (fixed)  |   |  |                          |   |   |   |
| Ambient illuminance           |       | Incandescent lamp: 10,000 lux max. Sunlight: 20,000 lux max.  |   |  |                          |   |   |   |
| Ambient temperature           |       | Operating: Groups of 1 to 3 Amplifiers: -25 to +55°C, Groups of 4 to 11 Amplifiers: -25 to +50°C, Groups of 12 to<br>16 Amplifiers: -25 to +45°C Storage: -30 to +70°C (with no icing and condensation) |   |  |                          |   |   |   |
| Ambient humidity              |       | Operating/Storage: 35% to 85% RH (with no condensation)   |   |  |                          |   |   |   |
| Insulation resistance         |       | 20 M min. at 500 VDC  |   |  |                          |   |   |   |
| Dielectric strength           |       | 1,000 VAC at 50/60 Hz for 1 minute  |   |  |                          |   |   | 500 VAC at<br>50/60 Hz for<br>1 minute                |
| Vibration resistance          |       | 10 to 55 Hz with a 1.5 mm double amplitude for 2 hrs each in X, Y and Z directions  |   |  |                          |   |   |   |
| Shock resistance              |       | Destruction: 500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions  |   |  |                          |   |   |   |
| Protective structure          |       | IEC 60529 IP50 (with Protective Cover attached)   |   |  |                          | IEC 60529 IP66<br>(with Protective<br>Cover attached) | IEC 60529 IP50<br>(with Protective<br>Cover attached) | IEC 60529 IP66<br>(with Protective<br>Cover attached) |
| Connection method             |       | Pre-wired models (standard length: 2 m)   |   |  |                          |   | Connector type  | M8 connector  |
| Weight (Packed<br>state)      |       | Approx. 100 g   |   |  |                          | Approx. 110 g   | Approx. 55 g  | 65 g  |
| Material                      | Case  | PBT (polybutylene terephthalate)  |   |  |                          |   |   |   |
|                               | Cover | Polycarbonate   |   |  |                          | Polyethersul-<br>fone (PES)                           | Polycarbonate   | Polyethersul-<br>fone (PES)                           |
| Accessories                   |       | Instruction manual  |   |  |                          |   |   |   |

\* If 8 or more Units are installed side-by-side, the response time will be 350  $\mu$ s max.


Amplifier Unit Connectors

| Item                  | Model    | E3X-CN11   | E3X-CN12     |
|-----------------------|----------|--|--------------|
| Rated current         |          | 2.5 A  |              |
| Rated voltage         |          | 50 V   |              |
| Contact resistance    |          | 20 m $\Omega$ max. (20 mVDC max., 100 mA max.) [By connection with amplifier unit and connection with adjacent connector (except conductor resistance of cable)] |              |
| No. of insertions     |          | 50 times (By connection with amplifier unit and connection with adjacent connector)  |              |
| Material              | Housing  | PBT (polybutylene terephthalate)   |              |
|                       | Contacts | Phosphor bronze/gold-plated nickel   |              |
| Weight (Packed state) |          | Approx. 55 g   | Approx. 25 g |


Characteristic data (typical)

Number of Turns of Sensitivity Adjuster  
vs. Sensing Distance

E32-T11L

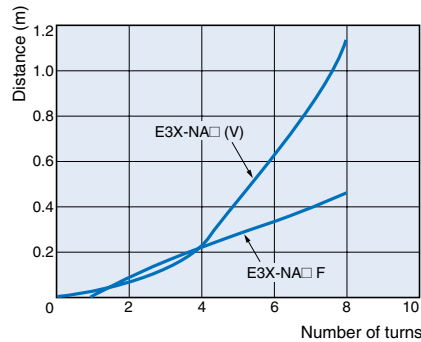


E32-D11L

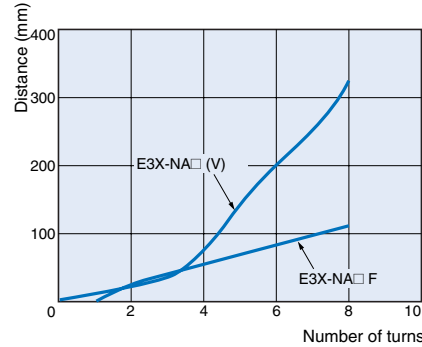


Sensing Distance vs. Hysteresis

E32-T11L

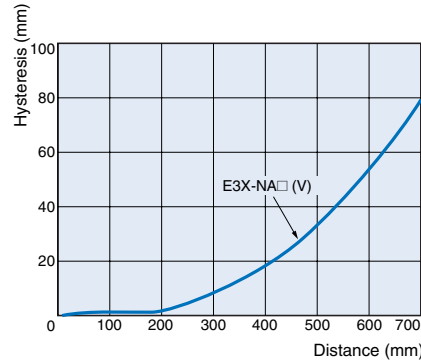

E32-D11L

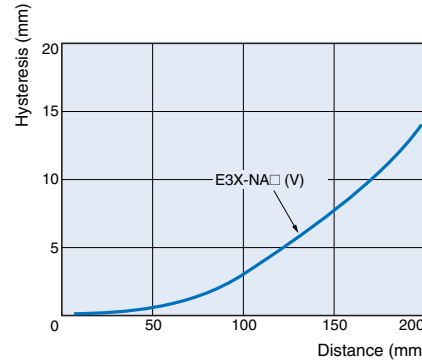

# Output Circuit Diagram


## NPN output

| Model   | Operating status of output transistor | Timing chart  | Mode selection switch | Output circuit  |
|---|---------------------------------------|---|-----------------------|---|
| E3X-NA11<br>E3X-NA6<br>E3X-NAG11<br>E3X-NA11F<br>E3X-NA11V<br>E3X-NA14V | Light ON                              | Incident<br>Interrupted<br>Operation indicator (orange) ON OFF<br>Output transistor ON OFF<br>Load Operate (Relay) Reset<br>(Between brown and black) | L ON (LIGHT ON)       | <p>M8 Connector Pin Arrangement</p> <p>Note: Pin 2 is open.</p> |
|   | Dark ON                               | Incident<br>Interrupted<br>Operation indicator (orange) ON OFF<br>Output transistor ON OFF<br>Load Operate (Relay) Reset<br>(Between brown and black) | D ON (DARK ON)        |   |

## PNP output

| Model   | Operating status of output transistor | Timing chart  | Mode selection switch | Output circuit  |
|---|---------------------------------------|---|-----------------------|---|
| E3X-NA41<br>E3X-NA8<br>E3X-NAG41<br>E3X-NA41F<br>E3X-NA41V<br>E3X-NA44V | Light ON                              | Incident<br>Interrupted<br>Operation indicator (orange) ON OFF<br>Output transistor ON OFF<br>Load Operate (Relay) Reset<br>(Between brown and black) | L ON (LIGHT ON)       | <p>M8 Connector Pin Arrangement</p> <p>Note: Pin 2 is open.</p> |
|   | Dark ON                               | Incident<br>Interrupted<br>Operation indicator (orange) ON OFF<br>Output transistor ON OFF<br>Load Operate (Relay) Reset<br>(Between brown and black) | D ON (DARK ON)        |   |

## Connectors (Sensor I/O connectors)

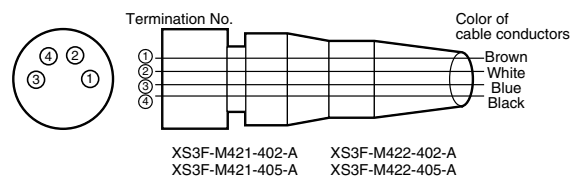


| Class  | Wire, outer jacket color | Connector pin No. | Application        |
|--------|--------------------------|-------------------|--------------------|
| For DC | Brown                    | ①                 | Power supply (+V)  |
|        | White                    | ②                 | -                  |
|        | Blue                     | ③                 | Power supply (0 V) |
|        | Black                    | ④                 | Output             |

Note: Pin 2 is not used.

Nomenclature:

Amplifier Units

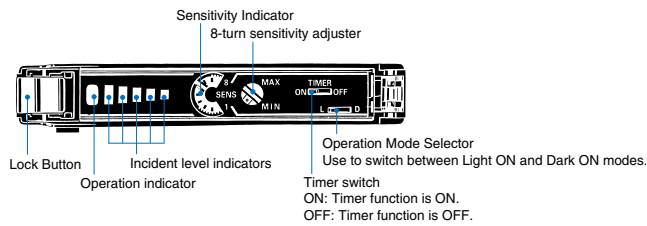

Operation

Indicator status

In addition to the operation indicator (orange), E3X-NA has indicators that denotes the incident level (4 green and 1 red indicators). Use them for optical axis adjustment and maintenance.

| Indicator status (L/ON)  | Operation indicator (L/ON) | Incident level                          |
|--|----------------------------|---|
| <div>Operation indicator Incident level indicators</div> <div>Not lit Lit (See note)</div> | Not lit                    | Approx. 80% to 90% of operating level   |
|  | Not lit                    | Approx. 80% to 90% of operating level   |
|  | Not lit or lit             | Approx. 90% to 110% of operating level  |
|  | Lit                        | Approx. 110% to 120% of operating level |
|  | Lit                        | Approx. 120% min. of operating level    |

Note: The rightmost indicator is turned ON at the "0 incident level".

Precautions

Correct Use

Amplifier Units

Design

Communications Hole


The window provided in the side face of the unit is a communication window for prevention of mutual interference when it is connected with the other unit. Note that the optional Mobile Console E3X-MC11 cannot be used. When the incident level of the sensor is excessive, mutual interference prevention may not be activated. At that time, make adjustment with the sensitivity adjuster. When the unit is used with the E3X-DA-N series, mutual interference prevention is not activated.

Mounting


Connection/removing of amplifier units

(Connection)

1. Install the Amplifier Units one at a time onto the DIN track.

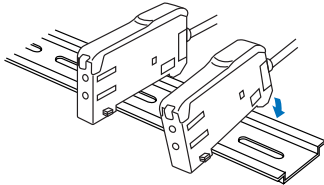

2. Slide the Amplifier Units together, line up the clips, and press the Amplifier Units together until they click into place.

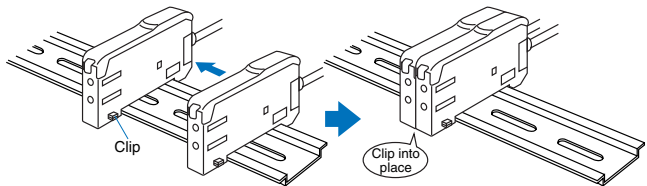

(Removing)

Slide one unit away from the other and remove them one by one. (Do not remove the connected units together from the DIN rail.)

Note: 1. When the amplifier units are interconnected, the operating ambient temperature changes depending on the number of connected amplifier units. Check "Ratings/Performance".  
2. Before connecting or removing the units, always switch power off.

Operating Environment

Ambient Conditions

Always remove dust, dirt, etc. from the optical communication window, which may disable communication.

Miscellaneous

Protective Cover

Be sure to set the Protective Cover before use.




## Amplifier Unit Connectors


### Installation

#### Installation Connectors

1. Insert the Master or Slave Connector into the Amplifier Unit until it clicks into place.

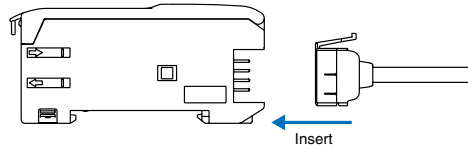


2. Join Amplifier Units together as required after all the Master and Slave Connectors have been inserted.
3. Apply the supplied seal to the non-connection surface of the master/slave connector.

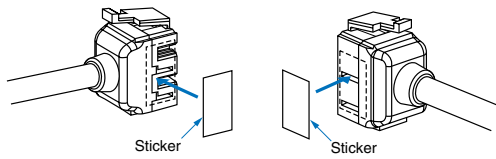

Note: Apply the seal to the grooved side.


#### Removing Connectors

1. Slide the slave Amplifier Unit for which the Connector is to be removed away from the rest of the group.
2. After the Amplifier Unit has been separated, press down on the lever on the Connector and remove it. (Do not attempt to remove Connectors without separating them from other Amplifier Units first.)

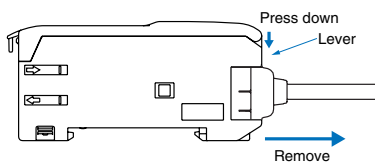


#### Mounting End Plate (PFP-M)

Depending on the installation type, an Amplifier Unit may move during operation. In this case, use an End Plate. Before installing an End Plate, remove the clip from the master Amplifier Unit using a nipper or similar tool.

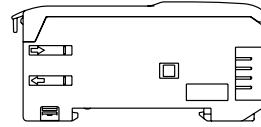


The sensor bottom is also equipped with the clip removing mechanism.

1. Insert the clip to be removed into the slit underneath the clip on another Amplifier Unit.

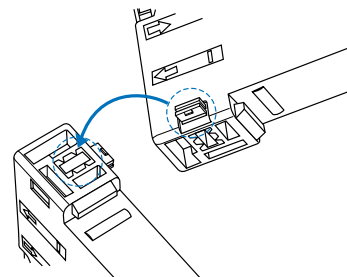

2. Remove the clip by rotating the Amplifier Unit.

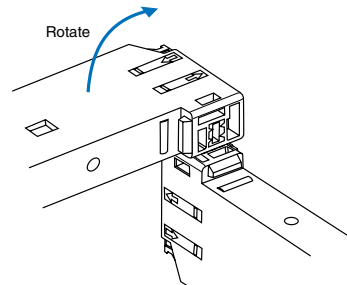

#### Pull Strengths for Connectors (Including Cables)


E3X-CN11: 30 N max. E3X-CN12: 12 N max.

# Dimensions (Unit: mm)

## Amplifier Units


### Pre-wired

E3X-NA11  
E3X-NA11F  
E3X-NA41  
E3X-NA41F  
E3X-NAG11  
E3X-NAG41

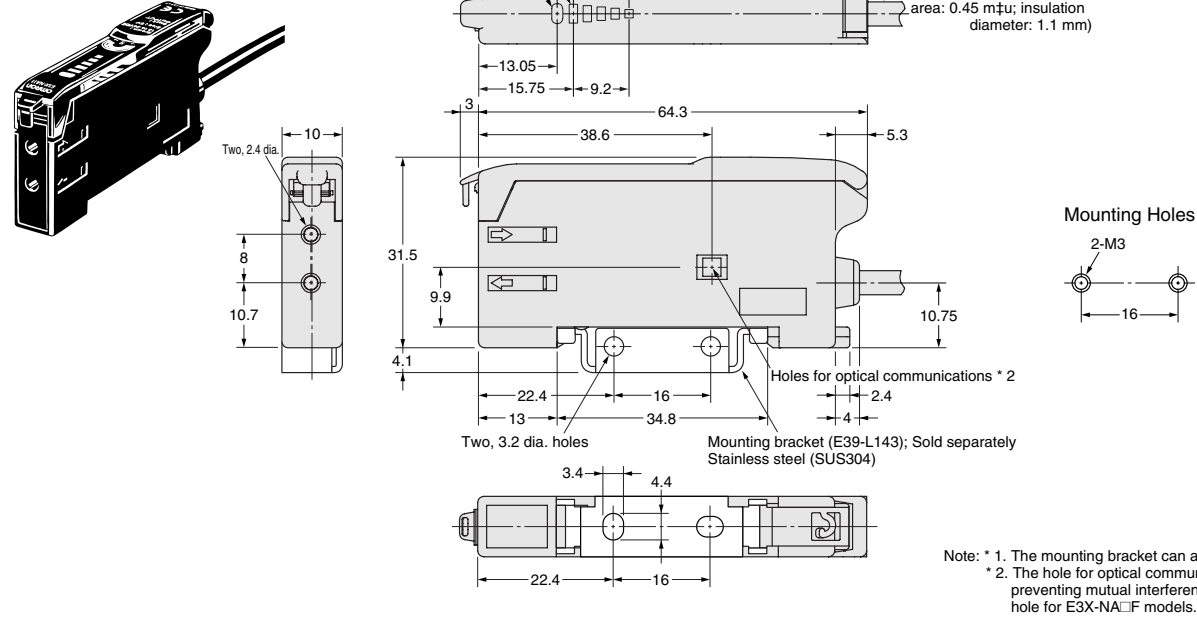



### Amplifier Units with cables, Water-resistant Models

E3X-NA11V  
E3X-NA41V

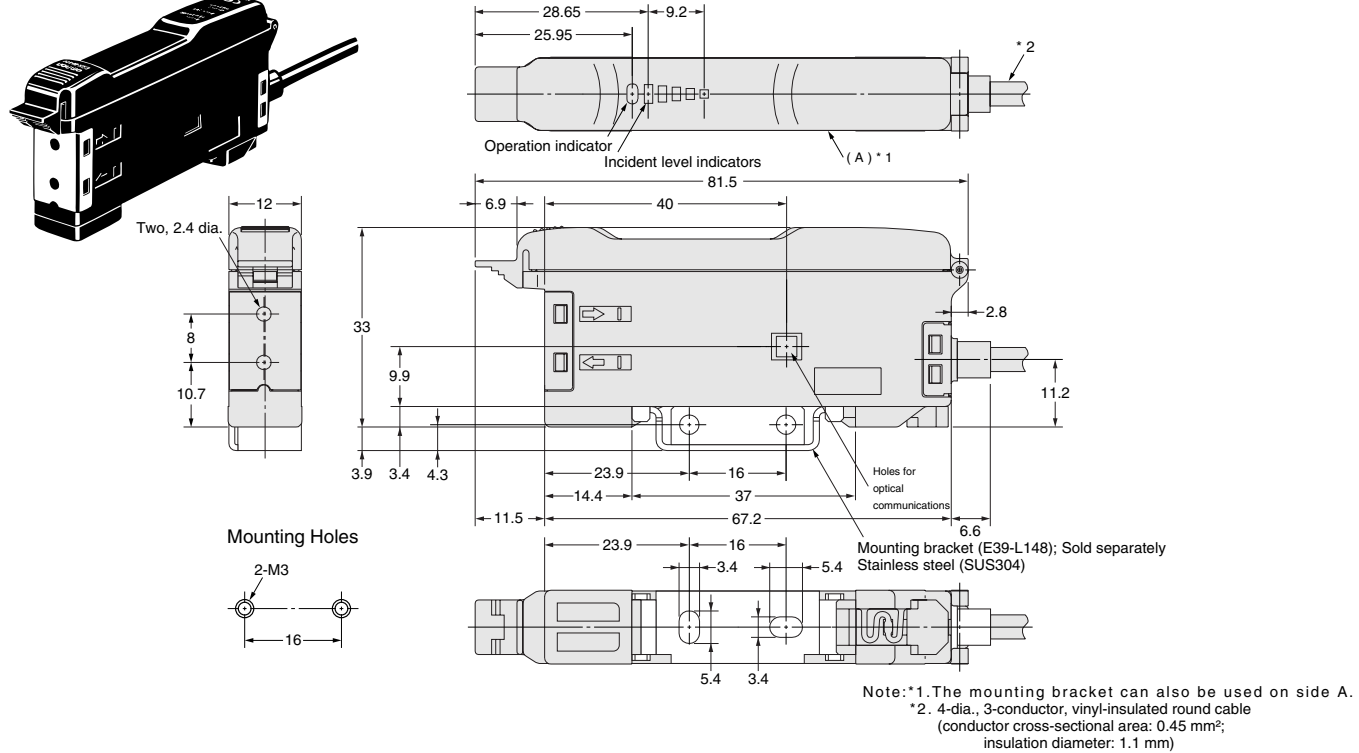


## Connector type


E3X-NA6  
E3X-NA8

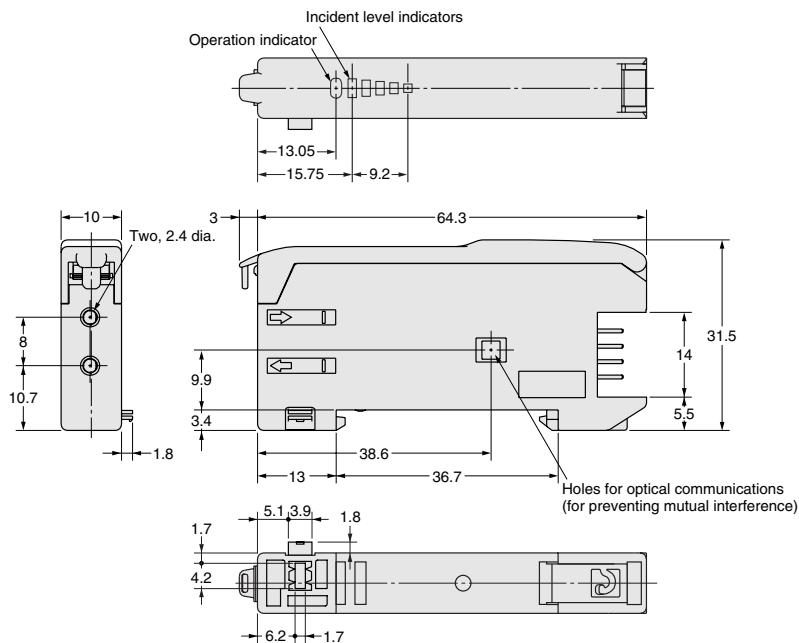

Dimensions with Master Connector Connected

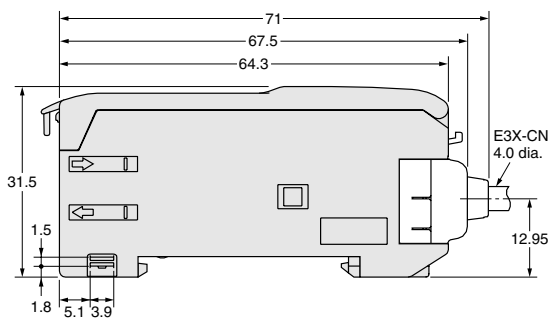

Dimensions with Slave Connector Connected

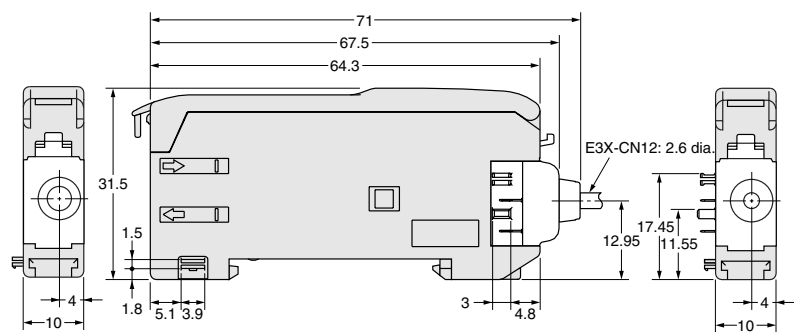


## Amplifier Units M8 Connectors, Water-resistant Models


E3X-NA14V  
E3X-NA44V



Note: \*1. The mounting bracket can also be used on side A.

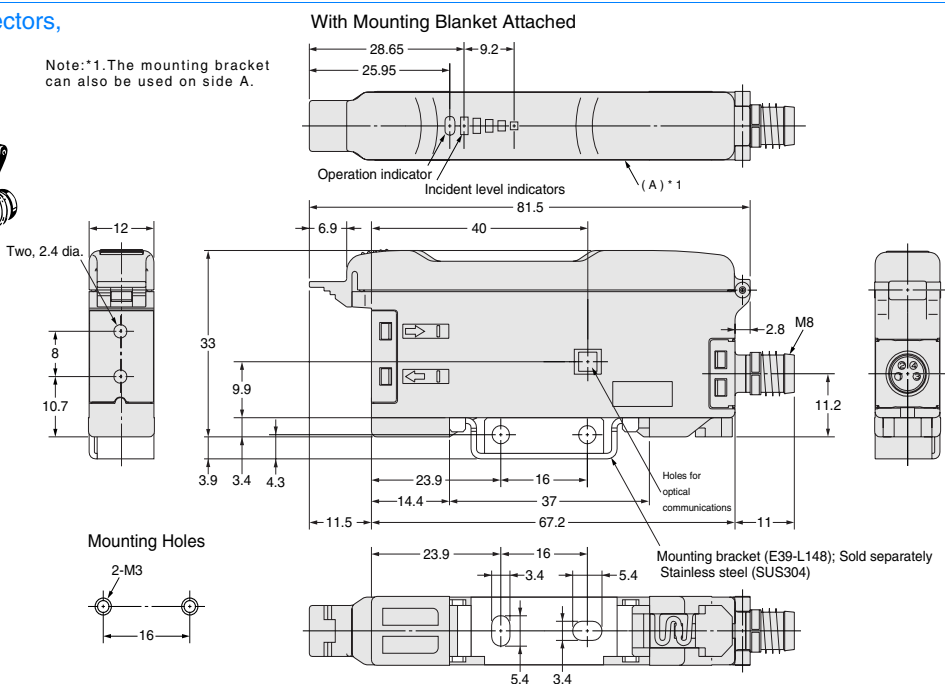




Mounting Holes



Amplifier Unit Connectors




Master connector

E3X-CN11

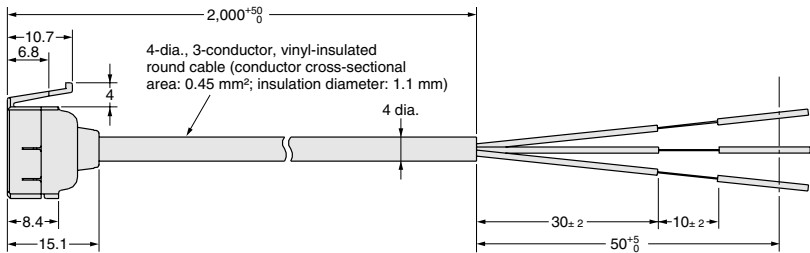

Slave connector

E3X-CN12

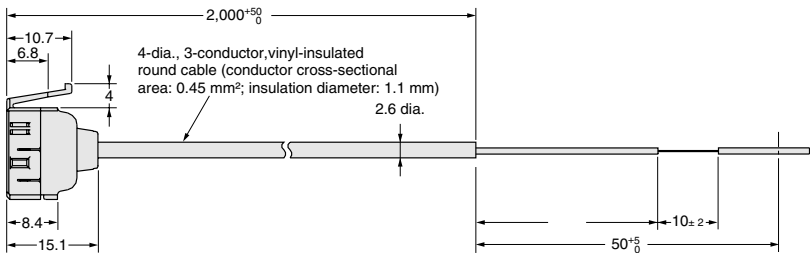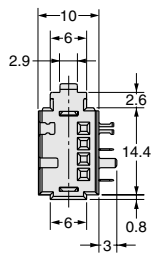

Accessories (Order Separately)

Mounting Brackets

H-5

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product  | Code   | Reference                  | Product link               |
|--|--------|----------------------------|----------------------------|
| Monitoring relays, Accessory level   | 145392 | PH-2 1M                    | <a href="#">Buy on EAN</a> |
| Security Product, Mechanical lock 2NC / 1NO + 3NC<br>LED IP67 M20 metal connector Special wrench | 382617 | D4SL-N4PDA-D4N             | <a href="#">Buy on EAN</a> |
|  | 393273 | PE155-i-30-<br>R88MK1K520F | <a href="#">Buy on EAN</a> |
| Control system, LynxpPlus Switch 8x10 / 100BaseT,<br>2x100 / 1000MbpsSFP                         | 354310 | WES L110-F2G               | <a href="#">Buy on EAN</a> |
|  | 198521 |                            | <a href="#">Buy on EAN</a> |
|  | 119243 |                            | <a href="#">Buy on EAN</a> |
| Photoelectric sensor, Robusta cc 3h 30m Barrera<br>Horiz. 2m Cable Receiver                      | 239802 | E3S-CT11-D 2M              | <a href="#">Buy on EAN</a> |
|  | 175426 |                            | <a href="#">Buy on EAN</a> |
|  | 124878 |                            | <a href="#">Buy on EAN</a> |
|  | 127107 |                            | <a href="#">Buy on EAN</a> |
|  | 124873 |                            | <a href="#">Buy on EAN</a> |
| Compact SSR, 20A, 264 VAC max, zero cross over   | 124870 |                            | <a href="#">Buy on EAN</a> |
|  | 124877 |                            | <a href="#">Buy on EAN</a> |
|  | 124876 |                            | <a href="#">Buy on EAN</a> |
|  | 348908 | PE050-i-7-<br>R88MG20030H  | <a href="#">Buy on EAN</a> |

|   |        |              |                            |
|---|--------|--------------|----------------------------|
| Race Final Industrial / Push buttons, cylindrical lever<br>low force Screw High sens. | 106486 | Z-15HW7855-B | <a href="#">Buy on EAN</a> |
|   | 121125 | G9EA-1 DC24  | <a href="#">Buy on EAN</a> |