



**Automatización Eléctrica**

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

## Laser Photoelectric Sensor with Built-in Amplifier

# E3Z-Laser

## *Compact photoelectric sensor with LASER light*

The E3Z LASER sensor in compact plastic housing features visible LASER light for precision positioning and detection applications.

- Visible LASER light for precision positioning and small object detection
- High power LED for high functional reserve




## Features

### Through-beam and Retroreflective Sensors


**Greatly Enhanced Beam Visibility for Easier Optical Axis Adjustment of Sensors**

- The optical design maximizes the linear propagation of laser beams. Red laser beams (class 1) can be precisely aligned on the targeted position.
- The functional reserve of the rated through-beam sensing distance of 60 m provides sufficient allowance, enabling Through-beam Models to be used reliably even in dusty environments.

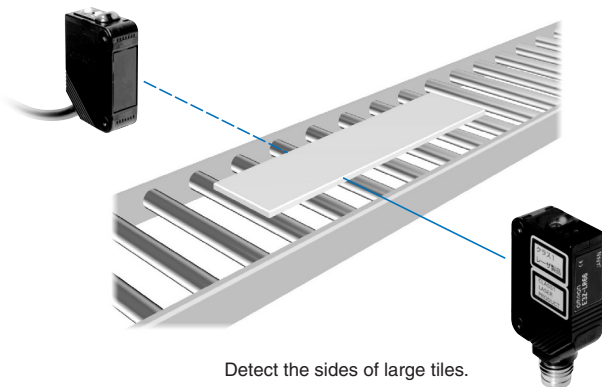


**Reliable Detection of Small Objects and Narrow Gaps with the Small Spot**

- The spot diameter for Through-beam and Retro-reflective Models is 5 mm (a typical example at 3 m), making it possible to detect small workpieces at long distances.
- The sensing distance for Retro-reflective Models is 15 m (when an E39-R1S Reflector is used). This is the longest leeway in the industry.

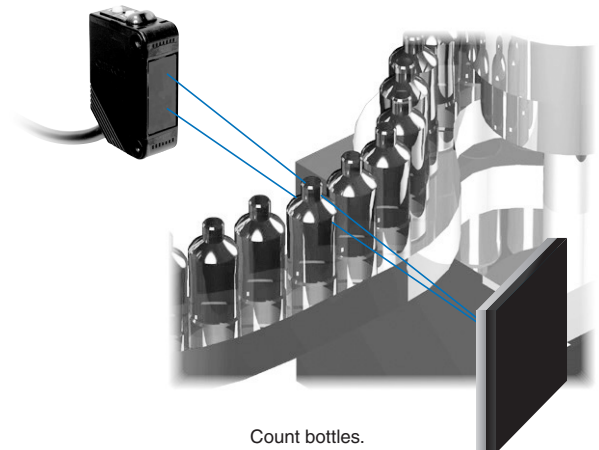


## BGS Models

### Long-distance Sensing at 300 mm (White Paper)

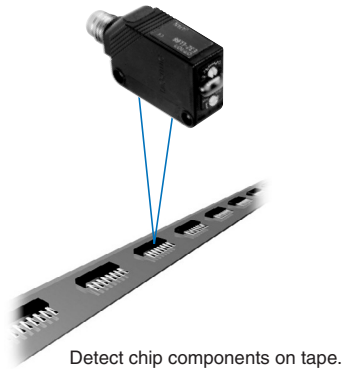


### A Low Black/White Error for Applications with Mixed Colors

- A black/white error as low as 5% makes detection and operation more stable.




### Easy Detection of Small Workpieces and Minor Differences in Levels with the Small Spot

- Stable detection is possible with no influence from a glossy background frame.
- The spot diameter for BGS models is 0.5 mm (typical example at 300 mm). Combined with an hysteresis of only 5%, even minute differences can be detected.
- Models with a response time of 0.5 ms (E3Z-LL□3/□8) are available as standard models for fast-moving objects.

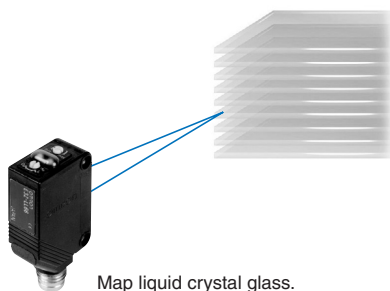

## Advanced Optical Technology of the E3Z Laser

Laser beam directional deviation can be suppressed and spot diameters can be freely customized. This is achieved through high-precision alignment technology based on LD and emitter lens modularization. The lens position can be adjusted inline. (Patent pending.)

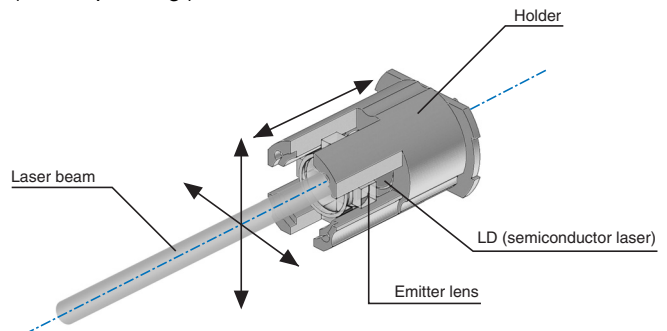








### Laser Diagram Conceptual Diagram

By precisely adjusting the emitter lens in the vertical, horizontal, and depth directions, alignment can be achieved with minimal directional deviation (to  $\pm 1$  degree).

# Ordering Information

## Sensors

 Red light

Sensing method	Appearance	Connection method	Response time	Sensing distance	Model	
					NPN output	PNP output
Through-beam		Pre-wired (2 m)*1	1 ms	 60 m	<b>E3Z-LT61</b>	<b>E3Z-LT81</b>
		Standard M8 Connector			<b>E3Z-LT66</b>	<b>E3Z-LT86</b>
Retro-reflective with MSR function	 *3	Pre-wired (2 m)*1		 15 m (300 mm) (Using E39-R1) 7 m (200 mm) (Using E39-R12) 7 m (200 mm) (Using E39-R6)	<b>E3Z-LR61</b>	<b>E3Z-LR81</b>
		Standard M8 Connector			<b>E3Z-LR66</b>	<b>E3Z-LR86</b>
		Pre-wired (2 m)*1			<b>E3Z-LR61</b>	<b>E3Z-LR81</b>
Distance-settable (BGS Models)		Pre-wired (2 m)*1	0.5 ms	 20 to 40 mm (Min. distance set) 20 to 300 mm (Max. distance set)	<b>E3Z-LL61</b>	<b>E3Z-LL81</b>
		Standard M8 Connector			<b>E3Z-LL66</b>	<b>E3Z-LL86</b>
		Pre-wired (2 m)*1		 25 to 40 mm (Min. distance set) 25 to 300 mm (Max. distance set)	<b>E3Z-LL63</b>	<b>E3Z-LL83</b>
		Standard M8 Connector			<b>E3Z-LL68</b>	<b>E3Z-LL88</b>

\*1. Pre-wired Models with a 0.5-m cable are also available for these products. When ordering, specify the cable length by adding "0.5M" to the end of the model number (e.g., E3Z-LT61 0.5M).

M12 Pre-wired Connector Models are also available. When ordering, add "-M1J" to the end of the model number (e.g., E3Z-LT61-M1J). The cable is 0.3 m long. The following connection forms are also available. Ask your OMRON representative for details.

Pre-wired Models with 1-m or 5-m cables

Pre-wired Connector Models with M8 4-pin connectors, M8 3-pin connectors.

\*2. Consult with your OMRON representative if a distance of more than 10 m is required. Models with large custom-size spots can be produced. These make optical axis adjustment easier and allow the beam to be received more stably by the Receiver even if vibration is present.

\*3. The Reflector is sold separately. Select the Reflector model most suited to the application.

\*4. Values in parentheses indicate the minimum required distance between the Sensor and Reflector.

## Accessories (Order Separately)










### Slits (for E3Z-LT□□)

Slit width	Sensing distance	Minimum detectable object (typical)	Model	Contents
0.5 mm dia.	3 m	0.1 mm dia.	<b>E39-S65A</b>	One set (contains Slits for both the Emitter and Receiver)

### Reflectors (for E3Z-LR□□)

Name	Sensing distance (typical)	Model	Remarks
Reflector	15 m (300 mm)	<b>E39-R1S</b>	<ul style="list-style-type: none"> <li>Retro-reflective models are not provided with Reflectors.</li> <li>Separate the Sensor and the Reflector by at least the distance given in parentheses.</li> <li>The MSR function is enabled.</li> </ul>
	7 m (200 mm)	<b>E39-R12</b>	
	7 m (200 mm)	<b>E39-R6</b>	

## Mounting Brackets





Appearance	Model	Quantity	Remarks	Appearance	Model	Quantity	Remarks
	<b>E39-L153</b>	1	Mounting Brackets		<b>E39-L98</b>	1	Metal Protective Cover Bracket *1
	<b>E39-L104</b>	1			<b>E39-L150</b>	1 set	(Sensor adjuster)
	<b>E39-L43</b>	1	Horizontal Mounting Bracket*1		<b>E39-L151</b>	1 set	Easily mounted to the aluminum frame rails of conveyors and easily adjusted. For left to right adjustment
	<b>E39-L142</b>	1	Horizontal Protective Cover Bracket*1				
	<b>E39-L44</b>	1	Rear Mounting Bracket		<b>E39-L144</b>	1	Compact Protective Cover Bracket (For E3Z only) *1

\*1. Cannot be used for Standard Connector models.

Note: When using Through-beam models, order one bracket for the Receiver and one for the Emitter.

## Sensor I/O Connectors

(Please refer to accessory datasheet E26E-EN-01 for a complete overview of all available sensor connectors)

Size	Cable	Appearance	Cable type		Model
M8	Standard	Straight 	2 m	4-wire	<b>XS3F-M421-402-A</b>
			5 m		<b>XS3F-M421-405-A</b>
		L-shaped 	2 m		<b>XS3F-M422-402-A</b>
			5 m		<b>XS3F-M422-405-A</b>
M12 (For -M1J models)	Standard	Straight 	2 m	3-wire	<b>XS2F-D421-DC0-A</b>
			5 m		<b>XS2F-D421-GC0-A</b>
		L-shaped 	2 m		<b>XS2F-D422-DC0-A</b>
			5 m		<b>XS2F-D422-GC0-A</b>

## Ratings and Specifications

Sensing method		Through-beam	Retro-reflective with MSR function	Distance-settable (BGS models)		
Response		Standard response			High-speed response	
Item	Model	NPN output	E3Z-LT61/-LT66	E3Z-LR61/-LR66	E3Z-LL61/-LL66	E3Z-LL63/-LL68
		PNP output	E3Z-LT81/-LT86	E3Z-LR81/-LR86	E3Z-LL81/-LL86	E3Z-LL83/-LL88
Sensing distance		60 m *1	0.3 to 15 m (when using E39-R1) 0.2 to 7 m (when using E39-R12) 0.2 to 7 m (when using E39-R6)	White paper (100 × 100 mm): 20 to 300 mm Black paper (100 × 100 mm): 20 to 160 mm	White paper (100 × 100 mm): 25 to 300 mm Black paper (100 × 100 mm): 25 to 100 mm	
Set distance range		---			White paper (100 × 100 mm): 40 to 300 mm Black paper (100 × 100 mm): 40 to 160 mm	White paper (100 × 100 mm): 40 to 300 mm Black paper (100 × 100 mm): 40 to 100 mm
Spot diameter (typical)		5 mm dia. at 3 m			0.5 mm dia. at 300 mm	
Standard sensing object		Opaque: 12 mm dia. min.	Opaque: 75 mm dia. min.	---		
Minimum detectable object (typical)		6 mm dia. opaque object at 3 m			0.2 mm dia. stainless-steel pin gauge at 300 mm	
Differential travel		---			5% max. of set distance	
Black/white error		---			5% at 160 mm	5% at 100 mm
Directional angle		Receiver: 3 to 15°	---			
Light source (wavelength)		Red LED (655 nm), JIS CClass 1, IEC Class 1, FDA Class II				
Power supply voltage		12 to 24 VDC±10%, ripple (p-p): 10% max.				
Current consumption		Emitter: 15 mA Receiver: 20 mA	30 mA max.			
Control output		Load power supply voltage: 26.4 VDC max., Load current: 100 mA max., Open collector output				
Residual output voltage		Load current of less than 10 mA: 1 V max. Load current of 10 to 100 mA: 2 V max.				
Output mode switching		Switch to change between light-ON and dark-ON				
Protection circuits		Reversed power supply polarity protection, Output short-circuit protection, and Reversed output polarity protection	Reversed power supply polarity protection, Output short-circuit protection, Mutual interference prevention, and Reversed output polarity protection			
Response time		Operate or reset: 1 ms max.				Operate or reset: 0.5 ms max.
Sensitivity adjustment		One-turn adjuster			Five-turn endless adjuster	
Ambient illumination (Receiver side)		Incandescent lamp: 3,000 lx max. Sunlight: 10,000 lx max.				
Ambient temperature range		Operating: -10 to 55 °C, Storage: -25 to 70 °C (with no icing or condensation)				
Ambient humidity range		Operating: 35% to 85%, Storage: 35% to 95% (with no icing or condensation)				
Insulation resistance		20 MΩ min. at 500 VDC				
Dielectric strength		1,000 VAC, 50/60 Hz for 1 min				
Vibration resistance		Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y, and Z directions				
Shock resistance		Destruction: 500 m/s <sup>2</sup> 3 times each in X, Y, and Z directions				
Degree of protection		IP67 (IEC 60529)				
Connection method		Pre-wired cable (standard length: 2 m): E3Z-L□□1/-L□□3 Standard M8 Connector: E3Z-L□□6/-L□□8				
Indicator		Operation indicator (orange) Stability indicator (green) Emitter for Through-beam Models has power indicator (orange) only.				

Sensing method		Through-beam	Retro-reflective with MSR function	Distance-settable (BGS models)		
Response		Standard response			High-speed response	
Item	Model	NPN output	E3Z-LT61/-LT66	E3Z-LR61/-LR66	E3Z-LL61/-LL66	E3Z-LL63/-LL68
		PNP output	E3Z-LT81/-LT86	E3Z-LR81/-LR86	E3Z-LL81/-LL86	E3Z-LL83/-LL88
Weight (packed state)	Pre-wired cable (2 m)	Approx. 120 g	Approx. 65 g			
	Standard Connector	Approx. 30 g	Approx. 20 g			
Material	Case	PBT (polybutylene terephthalate)				
	Lens	Modified polyarylate resin	Methacrylic resin	Modified polyarylate resin		
Accessories		Instruction manual (Neither Reflectors nor Mounting Brackets are provided with any of the above models.)				

\*1. Consult with your OMRON representative if a distance of more than 10 m is required. Models with large custom-size spots can be produced. These make optical axis adjustment easier and allow the beam to be received more stably by the Receiver even if vibration is present.


Note: An emission stop function can be added to Through-beam Models as a custom function. Ask your OMRON representative for details.

# Engineering Data (Typical)

## Parallel Operating Range


### Through-beam Models

E3Z-LT□□

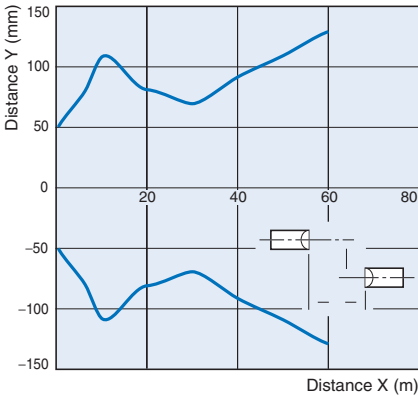

### Retro-reflective Models for transparent objects


E3Z-LR□□

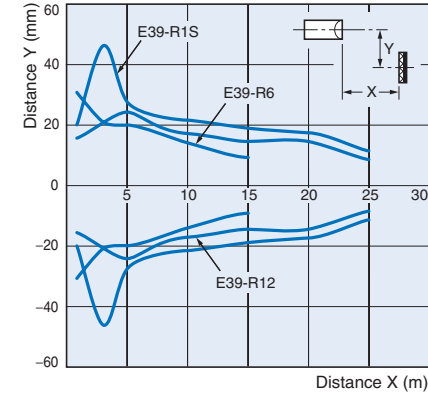

## Operating Range at a Set Distance of 300 mm

### BGS Models


E3Z-LL□□

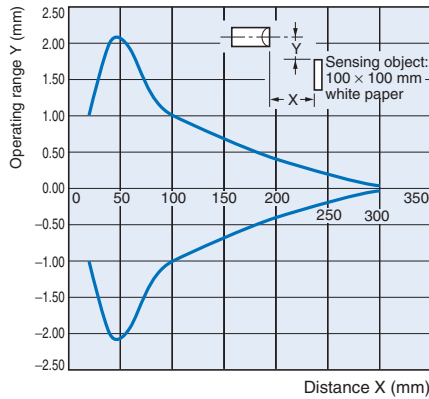

## Operating Range at a Set Distance of 40 mm

### BGS Models


E3Z-LL□□

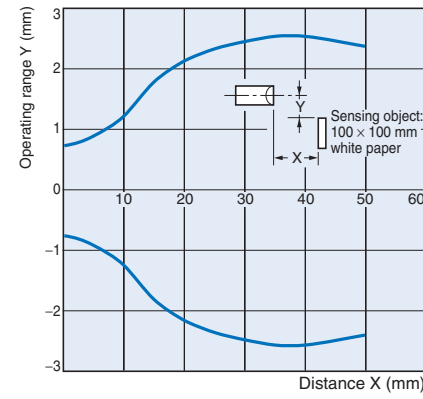

## Excess Gain vs. Set Distance


### Through-beam Models

E3Z-LT□□

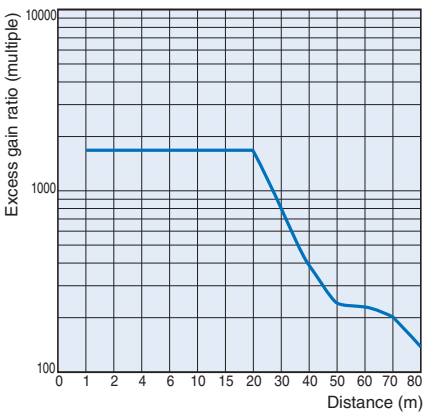

### Retro-reflective Models


E3Z-LR□□

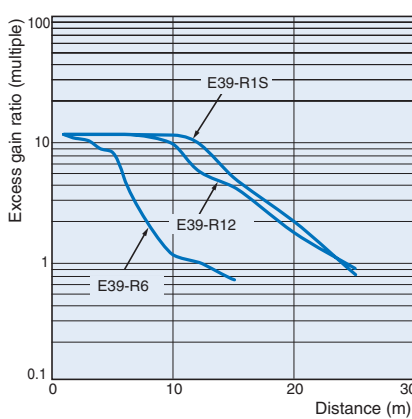


## Close Range Characteristics

### BGS Models

#### E3Z-LL□1/-LL□6

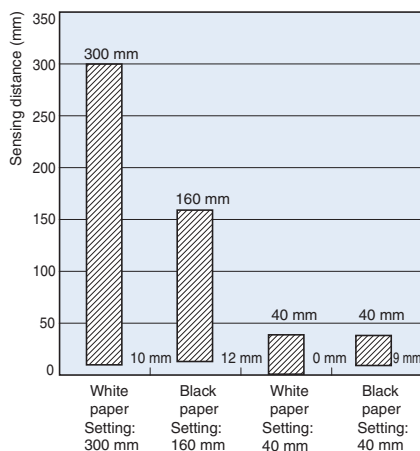

#### E3Z-LL□3/-LL□8

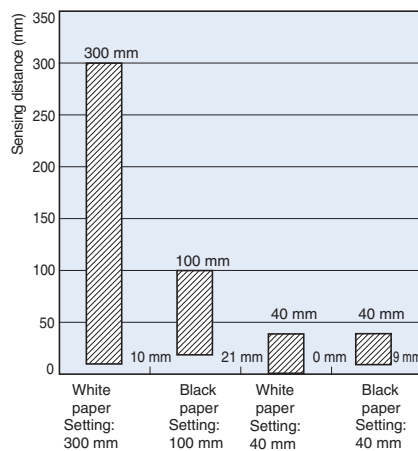


## Sensing Distance vs. Sensing Object Material

### BGS Models


#### E3Z-LL□1/-LL□6

##### White Paper with a Set Distance of 40 mm

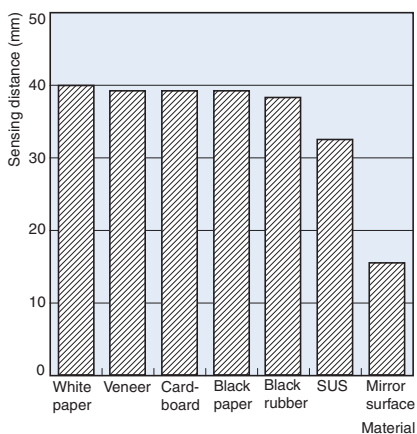


#### E3Z-LL□3/-LL□8

##### White Paper with a Set Distance of 40 mm

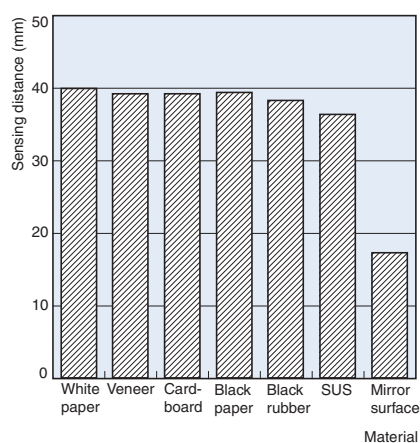


#### E3Z-LL□1/-LL□6

##### White Paper with a Set Distance of 300 mm

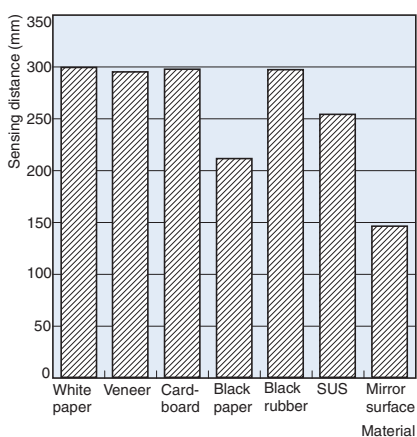

#### E3Z-LL□3/-LL□8

##### White Paper with a Set Distance of 100 mm

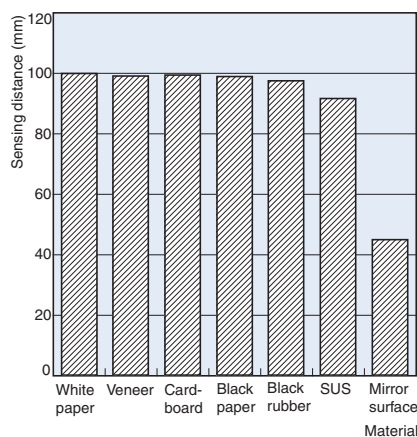

Emission Spot Diameter vs. Distance



Through-beam and Retro-reflective Models  
(Same for All Models)

BGS Models (Same for All Models)

E3Z-LT□□

E3Z-LL□□

E3Z-LR□□

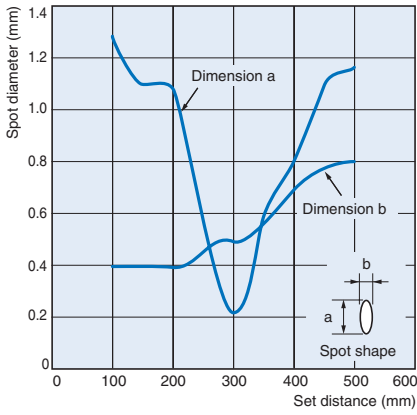
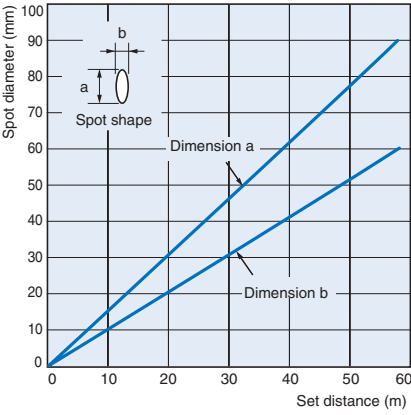


Error vs. Distance

BGS Models

E3Z-LL□1(LL□6)

E3Z-LL□3(LL□8)

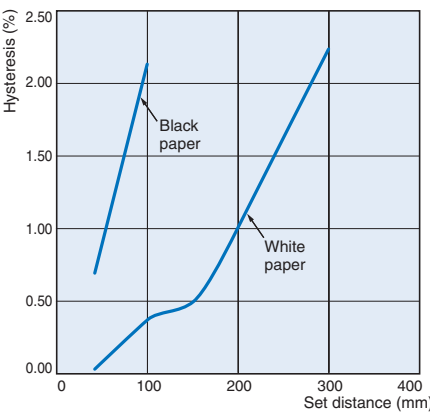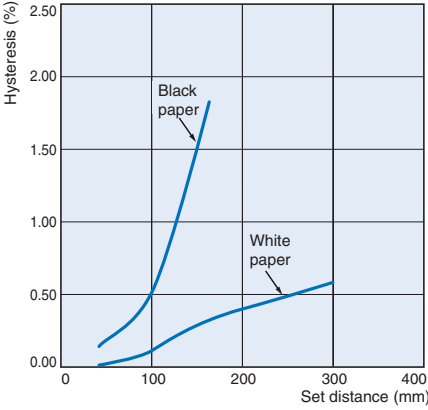

Angle Characteristics (Vertical)



BGS Models

Angle Characteristics (Vertical)

BGS Models

E3Z-LL□

E3Z-LL□

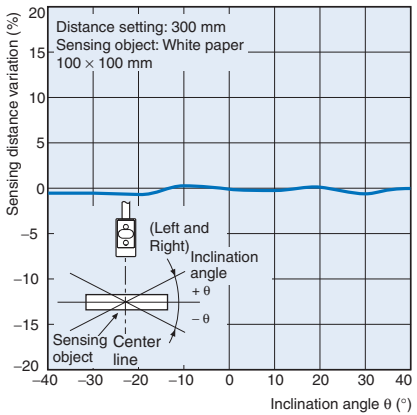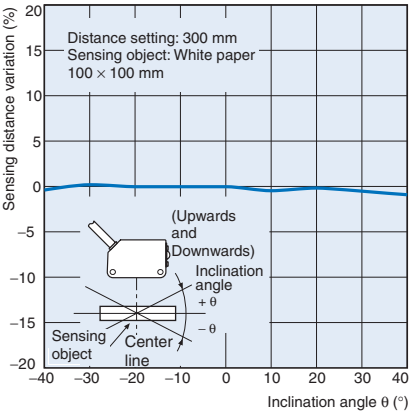




# I/O Circuit Diagrams

## NPN output

Model	Operation mode	Timing charts	Mode selector switch	Output circuit
E3Z-LT61 E3Z-LT66 E3Z-LR61 E3Z-LR66	Light ON		L side (LIGHT ON)	
	Dark ON		D side (DARK ON)	
E3Z-LL61 E3Z-LL66 E3Z-LL63 E3Z-LL68	Light ON		L side (LIGHT ON)	
	Dark ON		D side (DARK ON)	


## PNP output

Model	Operation mode	Timing chart	Mode selector switch	Output circuit
E3Z-LT81 E3Z-LT86 E3Z-LR81 E3Z-LR86	Light ON		L side (LIGHT ON)	
	Dark ON		D side (DARK ON)	

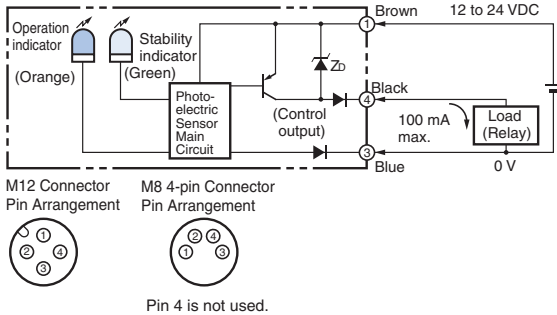
Model	Operation mode	Timing chart	Mode selector switch	Output circuit
E3Z-LL81 E3Z-LL86 E3Z-LL83 E3Z-LL88	Light ON		L side (LIGHT ON)	
	Dark ON		D side (DARK ON)	

Plugs (Sensor I/O Connectors)

M8 4-pin Connectors

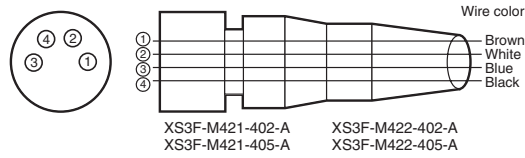

M12 Connectors

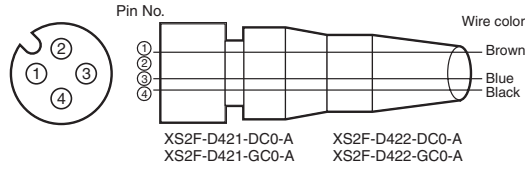

Nomenclature

Sensors with Sensitivity Adjustment and Mode Selector Switch

Through-beam Models

E3Z-LT□□ (Receiver)


Retro-reflective Models



Distance-settable Sensor

BGS Models

E3Z-LL□□

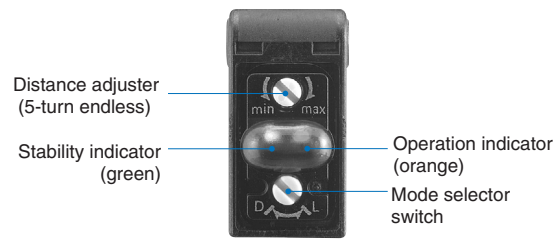

## Safety Precautions

Refer to *Warranty and Limitations of Liability* on page 20.

### Warning

This product is not designed or rated for ensuring safety of persons. Do not use it for such purpose.



To ensure safe use of laser products, do not allow the laser beam to enter your eye. Direct exposure may adversely affect your eyesight.



### Caution

Do not connect an AC power supply to the Sensor. If AC power (100 VAC or more) is supplied to the Sensor, it may explode or burn.



### Precautions for Safe Use

Be sure to abide by the following precautions for the safe operation of the Sensor.

#### Operating Environment

Do not use the Sensor in locations with explosive or flammable gas.

#### Wiring

##### Power Supply Voltage and Output Load Power Supply Voltage

Make sure that the power supply to the Sensor is within the rated voltage range. If a voltage exceeding the rated voltage range is supplied to the Sensor, it may explode or burn.

##### Power Supply Voltage

The maximum power supply voltage is 26.4 VDC. Applying a voltage exceeding the rated range may damage the Sensor or cause burning.

##### Load

Do not use a load that exceeds the rated load.

##### Load Short-circuiting

Do not short-circuit the load, otherwise the Sensor may be damaged or it may burn.

##### Connection without Load

Do not connect the power supply to the Sensor with no load connected, otherwise the internal elements may explode or burn. Always connect a load when wiring.

### Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

#### Usage Environment

##### Water Resistance

The Sensor is rated IP67. Do not use it in water, in the rain, or outdoors.

##### Ambient Environment

Do not install the product in the following locations. Doing so may result in product failure or malfunction.

- Locations subject to excess dust and dirt
- Locations subject to direct sunlight
- Locations subject to corrosive gas
- Locations subject to organic solvents
- Locations subject to shock or vibration
- Locations subject to exposure to water, oil, or chemicals
- Locations subject to high humidity or condensation

#### Designing

##### Power Reset Time

The Sensor is ready to operate 100 ms after the Sensor is turned ON. If the load and Sensor are connected to independent power supplies respectively, be sure to turn ON the Sensor before supplying power to the load.

#### Wiring

##### Avoiding Malfunctions

If using the Sensor with an inverter or servomotor, always ground the FG (frame ground) and G (ground) terminals, otherwise the Sensor may malfunction.

#### Mounting

##### Mounting the Sensor


- If Sensors are mounted face-to-face, make sure that the optical axes are not in opposition to each other. Otherwise, mutual interference may result.
- Always install the Sensor carefully so that the aperture angle range of the Sensor will not cause it to be directly exposed to intensive light, such as sunlight, fluorescent light, or incandescent light.
- Do not strike the Photoelectric Sensor with a hammer or any other tool during the installation of the Sensor, or the Sensor will lose its water-resistive properties.
- Use M3 screws to mount the Sensor.
- When mounting the case, make sure that the tightening torque applied to each screw does not exceed 0.54 N·m.

**Metal Connectors**

- Always turn OFF the power supply to the Sensor before connecting or disconnecting the metal connector.
- Hold the connector cover to connect or disconnect it.
- Secure the connector cover by hand. Do not use pliers, otherwise the connector may be damaged.
- Use a tightening torque of 0.3 to 0.4 N·m for M8 connectors and 0.4 to 0.5 N·m for M12 connectors. Vibration may cause the connectors to become loose and reduce the degree of protection if the tightening torque is not sufficient.


**Mounting Direction for Distance-settable Models**

- Make sure that the sensing side of the Sensor is parallel with the surface of the sensing objects. Normally, do not incline the Sensor towards the sensing object.

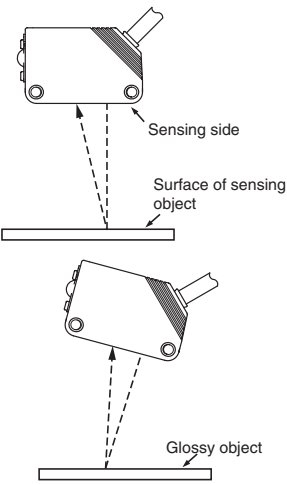


If the sensing object has a glossy surface, however, incline the Sensor by 5° to 10° as shown in the illustration, provided that the Sensor is not influenced by background objects.


- If there is a mirror-like object below the Sensor, the Sensor may not operate stably. Therefore, incline the Sensor or separate the Sensor from the mirror-like object as shown below.

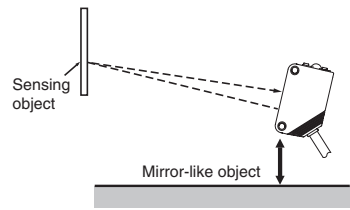

- Do not install the Sensor in the wrong direction. Refer to the following illustration.

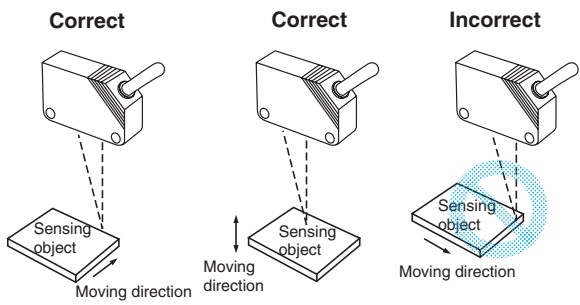


Install the Sensor as shown in the following illustration if each sensing object greatly differs in color or material.

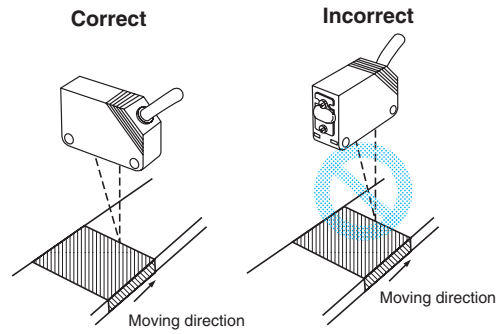

**Adjusting Distance-settable Models**

**Indicator Operation**

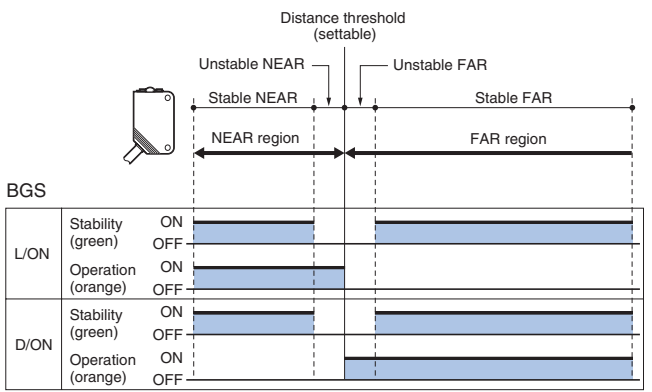

Note: If the stability indicator is lit, the detection/no detection status is stable within the rated ambient operating temperature (-10 to 55°C).

**Inspection and Maintenance**

**Cleaning**

Never use paint thinners or other organic solvents to clean the surface of the product.

# Dimensions (Unit: mm)


## Sensors

### Through-beam

#### Pre-wired Models

E3Z-LT61


E3Z-LT81

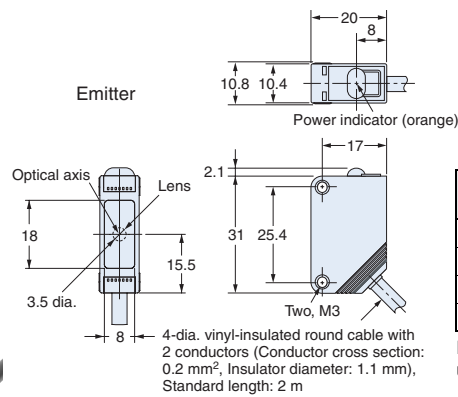


Terminal No.	Specifications
1	+V
2	---
3	0 V
4	---

Pins 2 and 4 are not used.


#### M12 Pre-wired Connector (E3Z-LT□□-M1J)

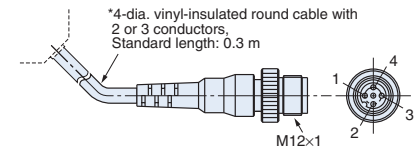

#### M8 Pre-wired Connector (Ask your OMRON representative for details.)

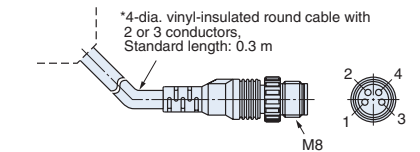

\* The Emitter cable has two conductors and the Receiver cable has three conductors.

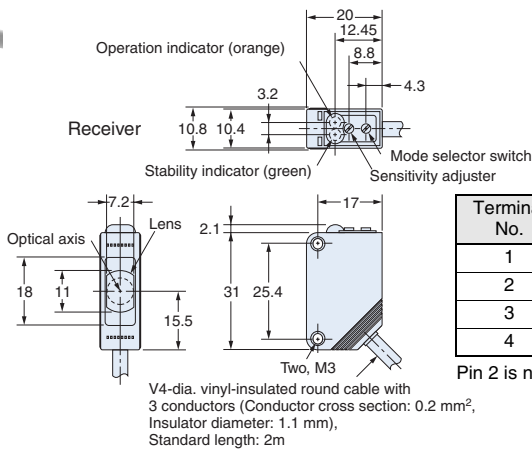

Terminal No.	Specifications
1	+V
2	---
3	0 V
4	Output



Pin 2 is not used.

### Through-beam

#### Standard Connector Models

E3Z-LT66

E3Z-LT86

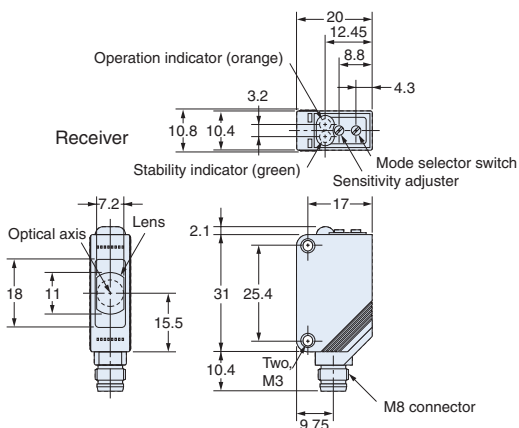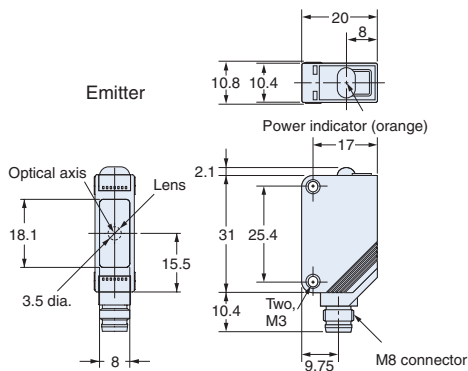


Retro-reflective Models


Pre-wired Models

E3Z-LR61


E3Z-LR81

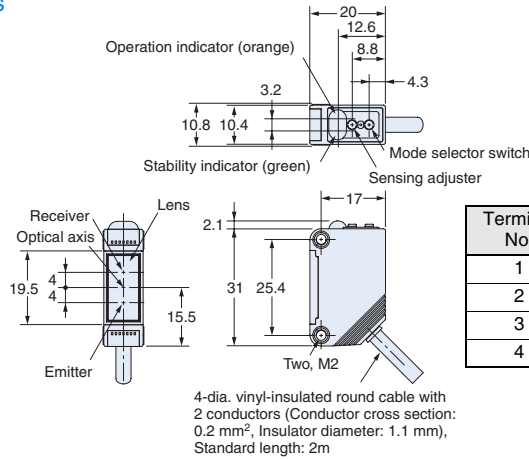

M12 Pre-wired Connector  
(E3Z-LR□□-M1J)

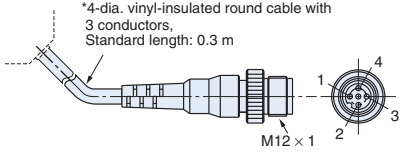

M8 Pre-wired Connector  
(Ask your OMRON representative for details.)

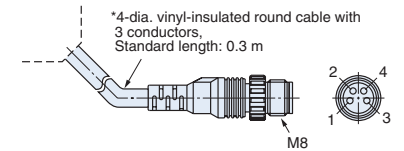


Retro-reflective Models


Standard Connector Models

E3Z-LR66


E3Z-LR86

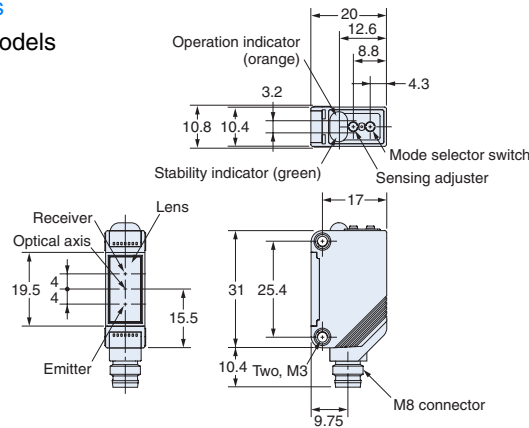

M12 Pre-wired Connector  
(E3Z-LL□□-M1J)

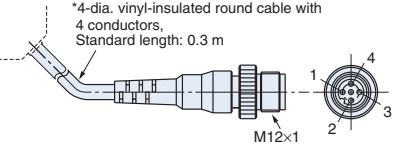

M8 Pre-wired Connector  
(Ask your OMRON representative for details.)

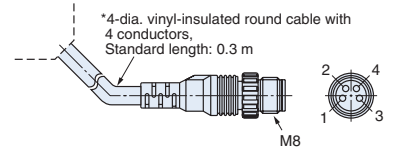

BGS Models


Pre-wired Models

E3Z-LL61

E3Z-LL81

E3Z-LL63

E3Z-LL83

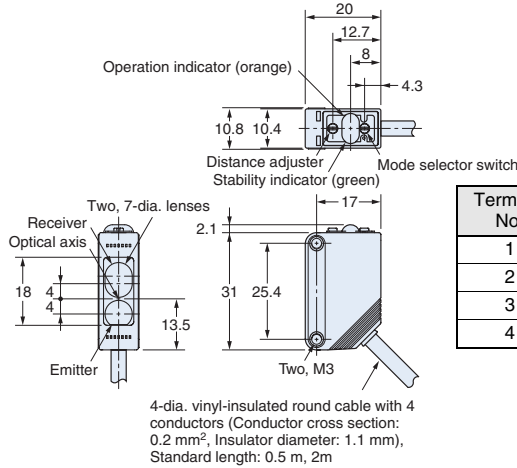

BGS Models


Standard M8  
Connector Models

E3Z-LL66

E3Z-LL86

E3Z-LL68


E3Z-LL88

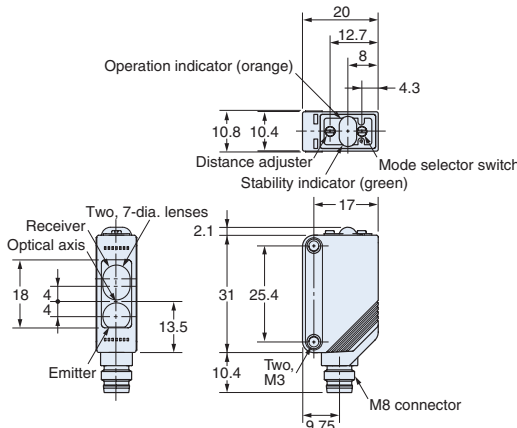


# Accessories (Order Separately)

## Slit

E39-S65A




Material  
SUS301 stainless steel




## Reflector

E39-R1S




Materials  
Reflective surface: Acrylic  
Rear surface: ABS

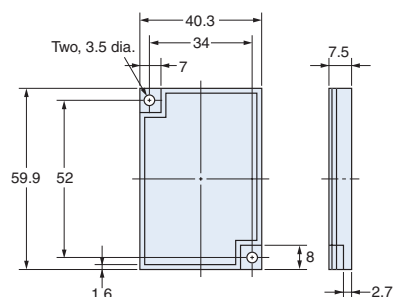


## Reflector

E39-R6




Materials  
Reflective surface: Acrylic  
Rear surface: ABS

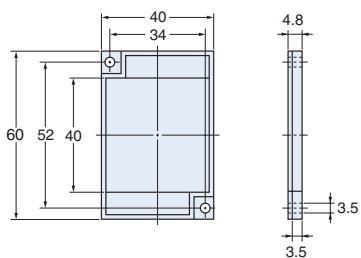

## Reflector

E39-R12

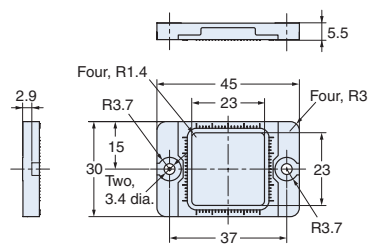







## WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

## LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## SUITABILITY FOR USE

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## PERFORMANCE DATA

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

## CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

## DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

## ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

## PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Cat. No. E368-E2-01-X

In the interest of product improvement, specifications are subject to change without notice.

## OMRON EUROPE B.V.

Wegalaan 67-69,  
NL-2132 JD, Hoofddorp,  
The Netherlands  
Phone: +31 23 568 13 00  
Fax: +31 23 568 13 88  
www.eu.omron.com

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Monitoring relays, Accessory level	145392	PH-2 1M	<a href="#">Buy on EAN</a>
Security Product, Mechanical lock 2NC / 1NO + 3NC LED IP67 M20 metal connector Special wrench	382617	D4SL-N4PDA-D4N	<a href="#">Buy on EAN</a>
Proximity Sensor, Inductive M8 Inox Flush 1mm Long 3h 5m cable NPN NC Lite	375990	E2B-S08LS01-WP-C2 5M	<a href="#">Buy on EAN</a>
Photoelectric sensor, Mirror 23,5x40mm	356189	E391-50	<a href="#">Buy on EAN</a>
	117914		<a href="#">Buy on EAN</a>
Monitoring relays, level regulator	159891	61F-GP-N AC100	<a href="#">Buy on EAN</a>
	169470		<a href="#">Buy on EAN</a>
Temperature controller, 1/8DIN (48 x 96mm), relay output, thermocouple/PT100 input, heater burnout alarm	182401	E5EN-R3HMT-500 AC100-240	<a href="#">Buy on EAN</a>
Photoelectric sensor, 60x18mm rectangular mirror. 2 mounting slots	356163	E39-R43	<a href="#">Buy on EAN</a>
	136014		<a href="#">Buy on EAN</a>
Total/time counter, DIN72x36mm, 100-240VAC, LCD, 6- digit, 30cps or 5kcps, NPN/PNP input, manual reset	119573		<a href="#">Buy on EAN</a>
Total/time counter, DIN72x36mm, 12-24VDC, LCD, 6- digit, 30cps or 5kcps, NPN/PNP input, manual reset	119571		<a href="#">Buy on EAN</a>
Total counter, DIN72x36mm, 12-24VDC, LCD, 8-digit, 30cps or 5kcps, NPN/PNP input, manual reset	119576		<a href="#">Buy on EAN</a>
Total/time counter, DIN72x36mm, 12-24VDC, LCD, 6- digit, 30cps or 5kcps, NPN/PNP input, manual reset	119574		<a href="#">Buy on EAN</a>

Counter, plug-in, 11-pin, DIN48x48mm, IP66, 4 digits, multifunction: 1-stage & total, SPST-NO 3A relay output, 12-24VDC/24VAC supply, 12VDC aux supply	119579		<a href="#">Buy on EAN</a>
	118799		<a href="#">Buy on EAN</a>
Control System, Power Supply Slot Cover Rack RV07	225308	WES-TP10	<a href="#">Buy on EAN</a>
Basis for relay connection Barras trans. G2RV Red 3Term	225337	P2RVM-030R	<a href="#">Buy on EAN</a>
	157089		<a href="#">Buy on EAN</a>
Miniature Race Final, 5A SPDT Plunger needle Faston FO = 50GF	146453	VX-5-1C23	<a href="#">Buy on EAN</a>
Output unit for K3N basic models only, 0-10VDC	146530		<a href="#">Buy on EAN</a>