

Panasonic

ideas for life

DIGITAL FIBER SENSOR

FX-500 SERIES Ver.2




At the industry's leading edge

FX-SERIES HIGH END MODEL



Stability

Industry leading stability

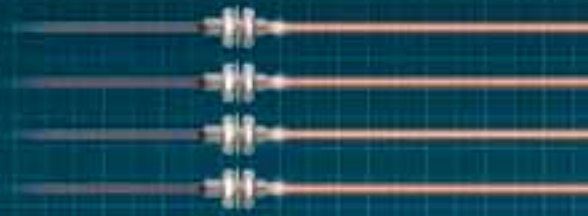

Decrease the variation among fiber sensors

High stability!

“Why are the values different even for the same detection?” “If we try to forcibly unify all the display values of incident light intensity, we will not be able to read the actual changes.”

SUNX focuses on the variation among fiber sensors and aims for absolute digitalization.

When the **FX-500** series is used together with our super quality fiber, the incident light intensity variation among units is decreased to only 1/4 of that of conventional models.


By being close to absolute values instead of modified digital values, changes in detection that could not be found in the past can now be monitored.

Super quality fiber

+

FX-500 series

Threshold value Incident light intensity

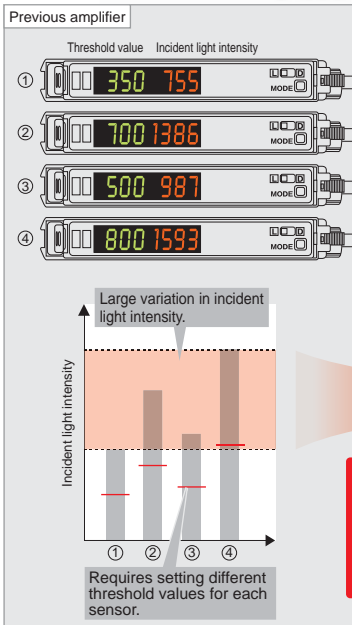


Digital control is essentially achieved

Stability of the incident light intensity is improved by 4 times*. Values of incident light intensity stay close together even after replacing an amplifier.

* Using a small diameter fiber (fiber core $\phi 0.5$ mm $\phi 0.020$ in).
If using a standard fiber (fiber core $\phi 1.0$ mm $\phi 0.039$ in), the variation will be double of that of conventional models.

1/4
incident light intensity variation
[from previous]



Specifying just one value in an operation manual is possible

In the case where multiple fiber sensors are installed under the same operating conditions, the incident light intensities are nearly identical to each other, allowing for the specification of one threshold across all sensors.

Maintenance is easy on stabilized fiber sensors


Because the incident light intensity is stable, the same threshold value can be used even when an amplifier is replaced. Also, copying of settings is easy when used together with optical communication.

Stability in incident light intensity and confidence in beam adjustment

When setting up fiber sensors in a row in the same layout, all incident light intensities will display nearly identical values once beams are aligned. This helps to raise installation precision and prevent trouble from occurring before equipment is turned on.

Improved fiber coupling efficiency and suppressed variation among units

In each unit we have accurately aligned the central axis of the fiber with the central axis of the emitted light, which creates a high coupling efficiency that helps to reduce variation among units.

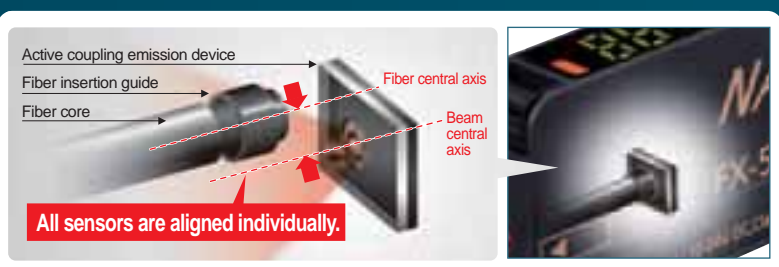

* Illustration is image only.

"Super quality fiber" with
stable emission amount

"Stabilized incident light intensities" even in multiple units

A quality that surpassed standard fiber

Introducing super quality fiber

New fibers developed using a new manufacturing method adopted by our own factory along with a persistent quality control system

The basic performance of a standard fiber is greatly enhanced!

Stable emission intensity $\updownarrow \pm 10$

Variation in emission intensity of the fiber core is controlled down to less than $\pm 10\%$, achieving a stable detection.

Expanded temperature range

Ambient temperature $[-40$ to $+70^\circ\text{C}$ -40 to $+158^\circ\text{F}$ in previous]

-55 to $+80^\circ\text{C}$
 -67 to $+176^\circ\text{F}$ **1.2 times**
more than previous

Integrated high-precision plug

The centering precision of the fiber core attached to the inserting plug is doubled. As the insertion precision is increased, the variation among units can be greatly suppressed.

$\phi 2.2$ mm $\phi 0.087$ in standard fiber



New material
Single core standard fiber with high flexibility




Previous
In general, high-flexibility types adopt a multi-fiber core which may result in large variation in light emission.

More flexible!

R4 \uparrow

Bending radius [Previous is R25 mm R0.984 in]

R 4 mm
R0.157 in **1/6**
of that of previous



More bendable!

Bending durability [Previous is 1,000 times]

10 million times **10,000 times**
more than previous

$\updownarrow \pm 10$

Variation in emission intensity is down to less than $\pm 10\%$

Under our new manufacturing method and quality control system, we have developed fiber heads that have a stabilized light emission. When used with the FX-500 amplifier, a complete digital control is essentially achieved.

Super quality fiber reduces optical transmission loss to less than $\pm 10\%$

Point 1

The beam axis deviation of each unit is kept within $\pm 2^\circ$ and the beam axis centering precision is kept within $\pm 150 \mu\text{m}$ $\pm 5.906 \text{ mil}$.

Point 2

High precision polishing is accomplished by using the PCTM polishing technique. The specularity of the end face of the fiber is 5 times greater.

Point 3

A high precision integrated plug is achieved with the centering precision of the fiber core being $\pm 40 \mu\text{m}$ 1.575 mil .

more than previous
Approx. **2** times

* For custom-ordered fibers of your required length, contact the sales office near you.

Speed & Distance

Industry leading sensing performance

Ultra high-speed & Ultra long range detection

The exclusive detection IC combined with the high intensity beam emitted from the active coupling emission device provides the capability of offering high-speed response time over a longer sensing range, opening up new possibilities for fiber sensor detection.

Max. 25 μ s response time

FX-500 with its ultra high response time improves productivity.



Performing minute object detection when using a small diameter fiber is now possible with a high response time and longer sensing range.

Hyper HYPR mode incorporated

FX-500 in combination with small diameter fibers which can handle challenging detections, allows super long sensing range.

Max. **5.7** times!
longer than the previous model



Long sensing range with small diameter fibers

Small diameter fibers with a compact head can perform long range and stable detection for minute objects.


Long sensing range even in high speed mode

A high speed response time of 25 μ s, which is 2.6 times more than previous, and a long sensing range are now possible in high speed mode.

Satisfying
both high
speed and
long range

The active coupling emission device efficiently focuses the beam through small diameter fibers

The super fine optical lens and emitting element are combined into one device enabling the beam emitted from the emitting element to be focused directly into the fiber. Coupling efficiency is therefore increased by 50 % compared to standard fiber (core \varnothing 1 mm \varnothing 0.039 in). In particular, the small diameter fibers (core \varnothing 0.5 mm \varnothing 0.020 in) see a dramatic increase in light intensity, making challenging detections possible.

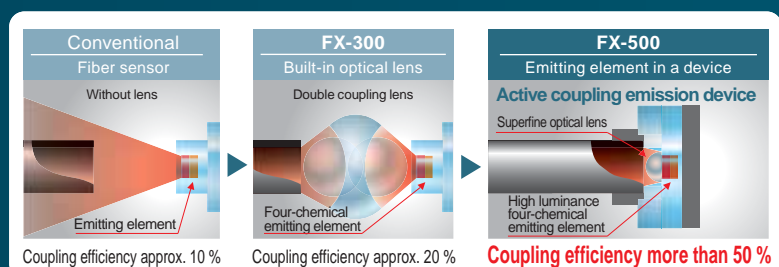

Coupling efficiency = (light intensity directed into the fiber / emission intensity of active coupling emission device) \times 100 * Illustration is image only.

Sharp detection with suppressed hysteresis

A different accuracy!


FX-500 with its accurate detection catches fractional difference in light intensity, fulfilling high precision and low-hysteresis applications.

H-02 mode


Long range detection of small objects with small difference in light intensity

FX-500 series achieves a long sensing range by its suppressed hysteresis and high intensity beam. Detection of minute objects over a long range is now more accurate compared to the past.

Comparison image of optimal sensing region




Long range detection of a glass target is now possible due to the ability of the sensor to detect small changes in light intensity.

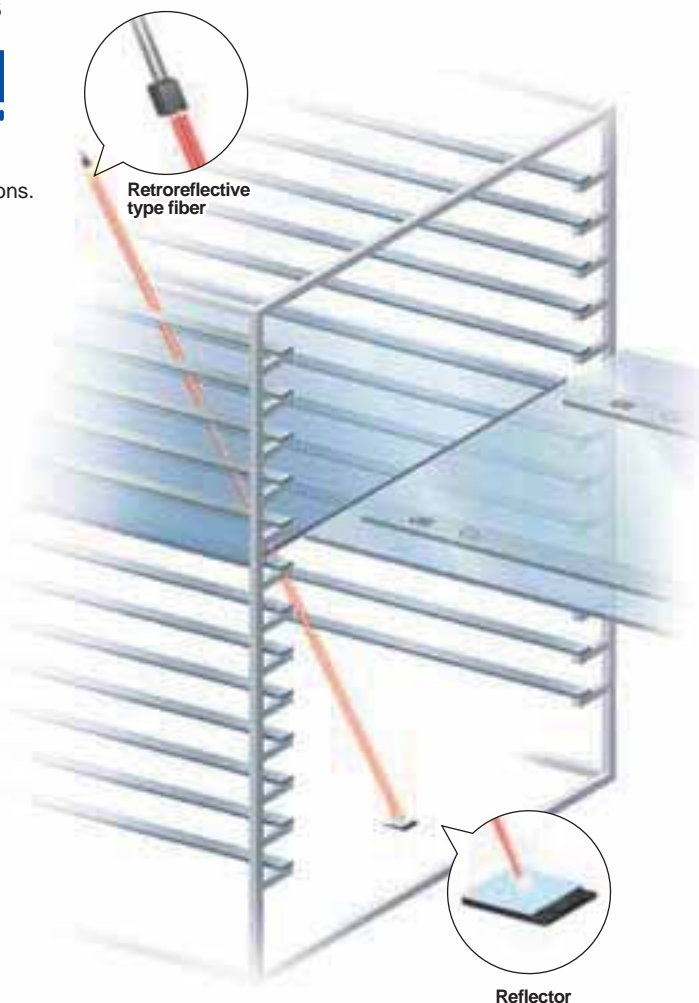


H-01 mode

Highly accurate detection while avoiding saturation

Even when the received light becomes saturated, the **FX-500** series cuts down hysteresis to the utmost limit in order to produce the optimal margin for detection.

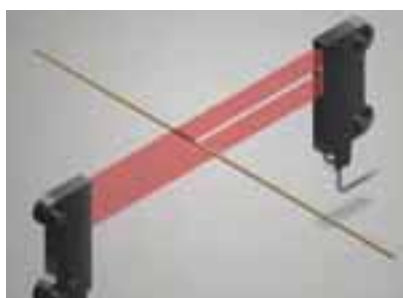


Comparison image of optimal sensing region



Light saturated region is reduced, and detection is possible even under high light intensity.


Three hysteresis modes

Hysteresis is the difference in incident light intensity at the points when the output turns ON and when the output turns OFF. Hysteresis was originally intended to be used as a measure against vibrations, but SUNX provides three hysteresis modes to suit the need of fiber sensors.



Mode table

Mode	Hysteresis amount	Light intensity	Description
H-01	Minimal	Small	Sharp detection with high accuracy is possible in this mode. Optimal for minute object detection where light saturates easily.
H-02	Small	Large	Initial setting mode. Accurate detection such as long range detection of a large glass substrate is possible.
H-03	Large	Large	A mode used for chattering prevention. Works in adverse environments such as vibration or dirt.

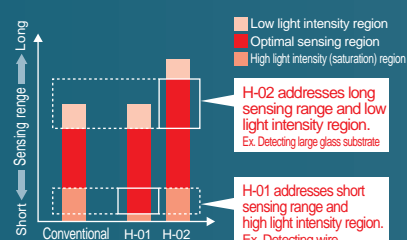

Class leading form and operability

New form!

Flat display with wide viewing angle



The large and high-contrast 7-segment display of high luminance provides clear visibility from a wide angle of view.



Streamlined fiber clutch

While the conventional fiber installation is done after opening up the cover, the **FX-500** series adopts a guard structure, eliminating the cover so that the fiber installation can be done in one step.


Streamlined fiber clutch

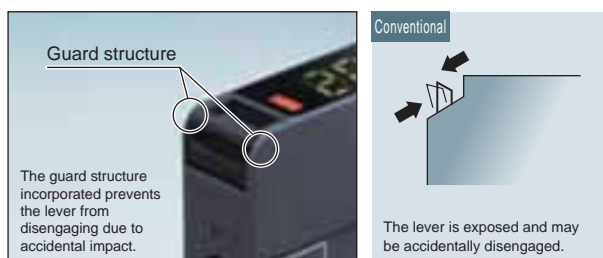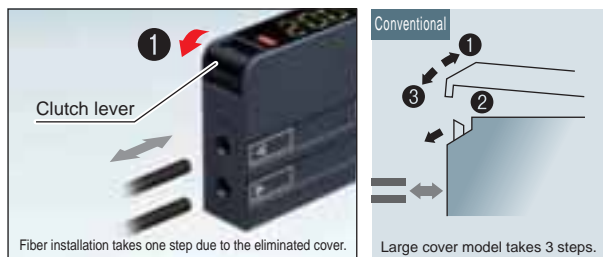


MODE NAVI + Direct setting

MODE NAVI uses three indicators and a dual display to show the amplifier's basic operations. The current operation mode can be confirmed at a glance, so even a first time user can easily operate the amplifier.

NAVI display (lights out during RUN mode)

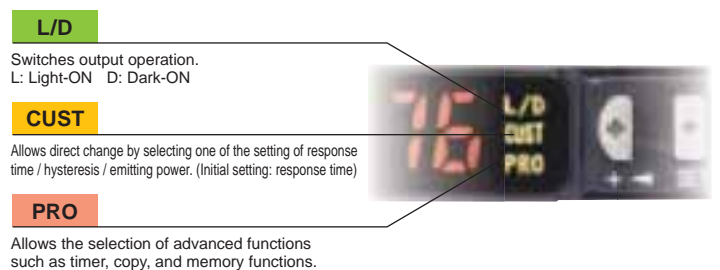

Direct setting

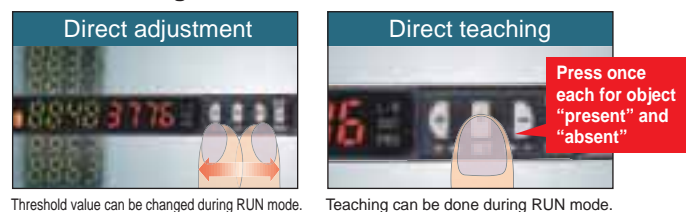


A variety of functions at the industry's leading edge

Resolves variation in incident light intensity display

Display adjustment setting


Even if there is no problem in detection, the variation in display may make it difficult for an operator to verify proper operation. By using the display adjustment setting, random values can be adjusted, and the visual variation can be resolved to help define proper operation in an operation manual.

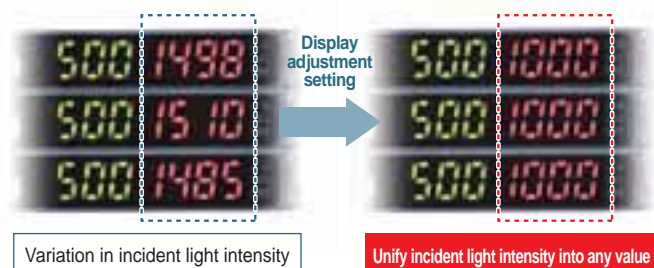

Stable detection over long and short periods

Stabilized emission intensity


The “four-chemical emitting element” was first incorporated in the conventional model **FX-300** to maintain a stable level of light emission and has now become an industry standard. **FX-500** series continues to adopt the same emitting element as well as the “APC (Auto Power Control) circuit” which improves stability in short periods such as when the power is turned on.

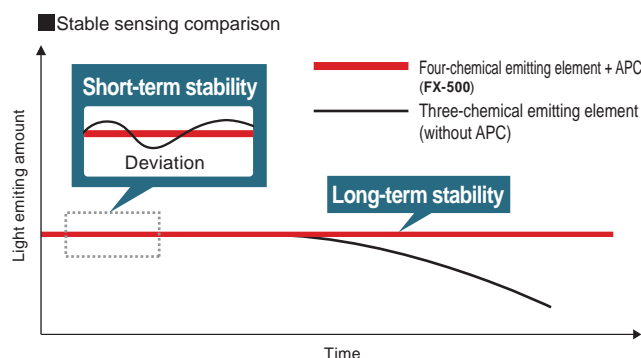

Saves maintenance time

Threshold tracking function

This function seeks changes in the light emitting amount resulting from changes in the environment over long periods (such as dust levels), so that the incident light intensity can be checked at desired intervals and the threshold values can be reset automatically.

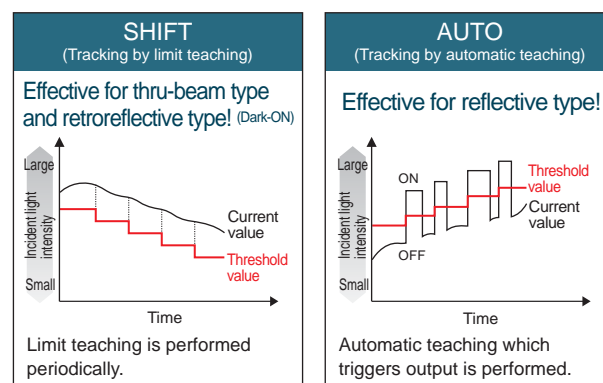

Suitable for preventative maintenance

Self-diagnosis output


FX-502(P) / 505(P)-C2

FX-502(P) / 505(P)-C2 can set Output 2 as self-diagnosis output. When Output 1's threshold value teaching is carried out, Output 2 is set concurrently with the setting randomly shifted by the amount of surplus of threshold value.

■ Detect drops in light intensity (e.g. used in dusty environment)



Self-diagnosis can be used with the threshold tracking function for added effectiveness.

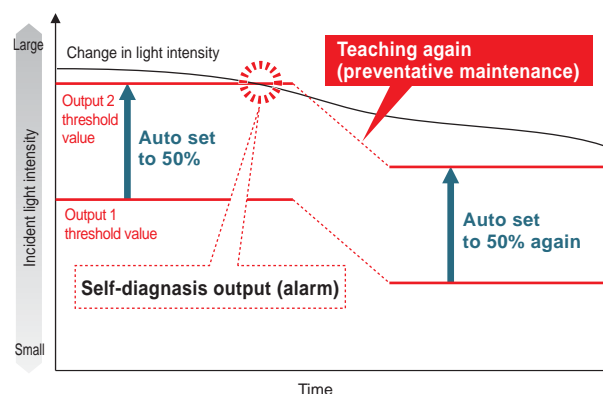

A variety of functions at the industry's leading edge

Stable detection while being eco-friendly

Emission power & gain setting


For cases when the incident light intensity saturates the receiver, the light intensity can be attenuated to the optimal level by AUTO without changing the response time. This allows for stable detection while maintaining an optimal S/N ratio and saves energy by controlling the emitting electric current.

Detecting a transparent sheet



Object present

Object absent

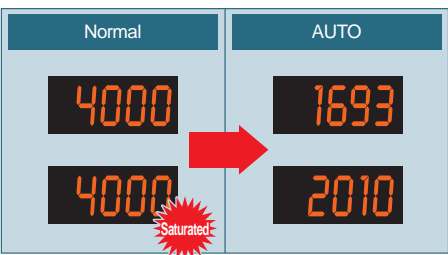


Auto mode (AUTO) and 3-level manual mode (3 levels: H / M / L [adjustable]) are incorporated.

Built-in logic functions


No PLC necessary saving material and programming costs

Logical calculation functions

Three logical calculations (AND, OR, XOR), are selectable using Output 1 of multiple FX-500 series amplifiers. A PLC is not required which helps to reduce material and programming and costs.




Calculation of two neighboring amplifiers



Calculation of two outputs in one amplifier FX-502(P) / 505(P)-C2




Calculation of one amplifier and external input FX-502(P) / 505(P)-C2



Equipped with 5 types timers

A wide variety of timer control operations can be carried out by these fiber sensors alone.

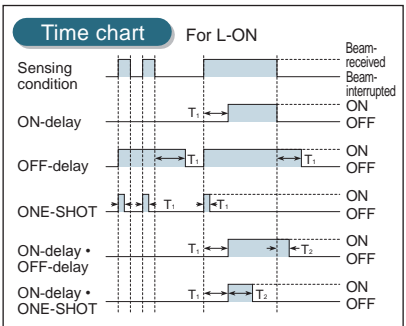


Timer period: 0.05 ms to 32 s
Output 1 has ON-delay + OFF-delay and ON-delay + ONE-SHOT timers.


Analog control is possible

Analog output cable type FX-505(P)-C2

A 4 to 20 mA analog output represents the digital value of incident light intensity



Edge tracking of film or sheet



Drifting path can be tracked as the light intensity changes.

8 data banks

Smooth setup changes

The number of data banks used for saving the setup conditions of the amplifier is increased to eight. Setup conditions can be saved and loaded to make setup changes easy at worksite that manufactures multiple models.

External input

Remote control improves work efficiency FX-502(P) / 505(P)-C2


Work efficiency can be improved by operating via a PLC output or other external signal. (FX-502(P)) can operate via external signal when switching from Output 2 to external input.)

Functions operable by external input

Full-auto / Limit / 2-point teaching	Display adjustment setting
Data bank load / save	Logical calculation (self-unit only)
Emission halt	Copying function lock (self-unit only)

Selectable interference prevention


In addition to the automatic interference prevention function which is enabled through the optical communication of cascade connected amplifiers, an alternate frequency interference prevention function is also incorporated. So even for layouts where optical communication cannot be carried out, switching of emission frequencies allows interference prevention.

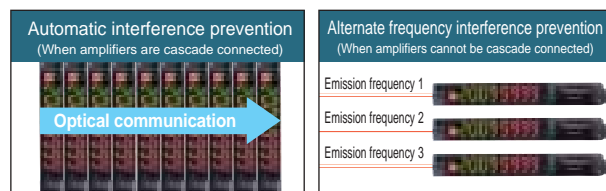

* Refer to specifications for details of number of sensors allowed in interference prevention.

No need to specify a main unit or sub unit

All **FX-500** amplifiers can be used as either a main unit or a sub unit. Just use a main cable or a sub cable to distinguish the two. This reduces the costs of inventory management.

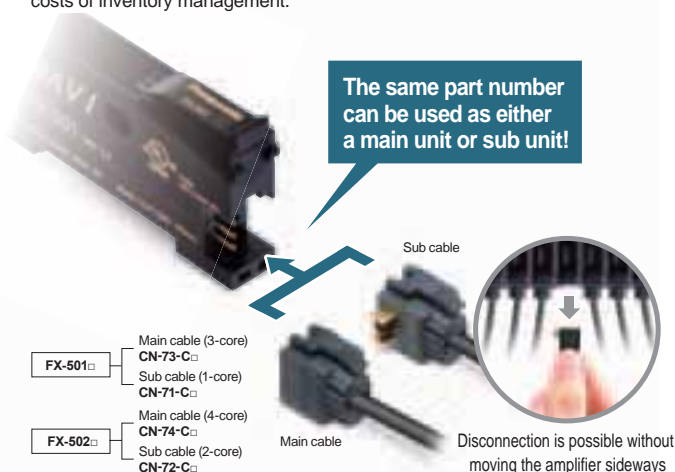


PRO mode functions

PRO1	Response time setting
	Timer setting
	Hysteresis setting
	Shift amount setting
	Emission power setting
	Timer range setting
PRO2	Teaching lock setting
	Digital display item setting
	Digital display turning on setting
	ECO setting
	Period hold setting
PRO3	Data bank loading setting
	Data bank saving setting
	Back up setting
	Input / output setting ^{*1}
PRO4	Copy setting
	Copy action setting
	Copy lock setting
	Communication protocol setting
	External input setting ^{*2}


An optical communication function allows sensors to be adjusted simultaneously

The optical communication function allows the data that is currently set to be copied and saved all at once for all amplifiers connected together from the right side. This greatly reduces troublesome setup tasks and makes setup much smoother.

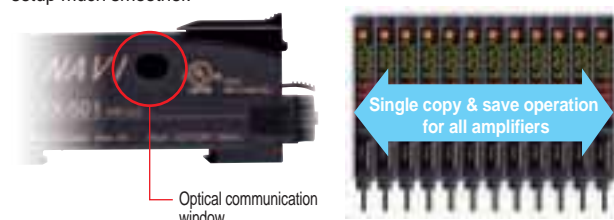

Wire-saving, space-saving

The quick-connection cables enable reduction in wiring. The connections and man-hours required for the relay terminal block setup can be reduced and valuable space is saved.

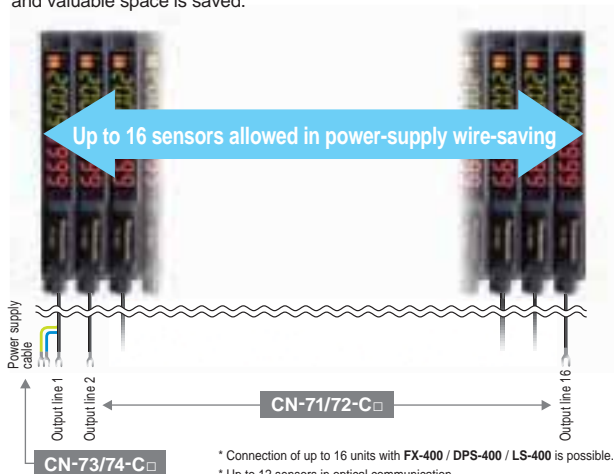




PRO5	Code setting	
	Display adjustment setting	
	Reset setting	
	CUSTOM setting	
	Interference prevention setting	
PRO6	Sensing output mode	Normal mode
		Window comparator mode ^{*3}
		Rising differential mode
		Trailing differential mode
		Hysteresis mode
		Forced ON output mode
		Forced OFF output mode
		Self-diagnosis output mode ^{*4}
		Answer back output mode ^{*5}
PRO7	Setting of threshold value tracking	Logical operation setting ^{*6}
		Setting of threshold tracking
		Sensing output setting
		Storage cycle setting
		Algorithm setting

*1: FX-502(P) only *2: FX-502(P) and FX-505(P)-C2 only *3: Output 1 only
 *4: Output 2 only of FX-502(P) and FX-505(P)-C2 *5: Output 2 only of FX-505(P)-C2
 *6: FX-501(P) can do a part of operations.

ORDER GUIDE

Amplifiers

Quick-connection cable is not supplied with **FX-501(P)** and **FX-502(P)**. Please order it separately.

Type	Appearance	Model No.	Emitting element	Output	External input
Standard type		FX-501	Red LED	NPN open-collector transistor	
		FX-501P		PNP open-collector transistor	
2-output type		FX-502		NPN open-collector transistor 2 outputs	Incorporated (Switchable with Output 2)
		FX-502P		PNP open-collector transistor 2 outputs	
Cable type		FX-505-C2		NPN open-collector transistor 2 outputs analog output	Incorporated
		FX-505P-C2		PNP open-collector transistor 2 outputs analog output	

Quick-connection cables


For FX-501(P)

Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Model No.	Description	
Main cable (3-core)	CN-73-C1	Length: 1 m 3.281 ft	0.15 mm ² 3-core cabtyre cable, with connector on one end Cable outer diameter: ø3.0 mm ø0.118 in
	CN-73-C2	Length: 2 m 6.562 ft	
	CN-73-C5	Length: 5 m 16.404 ft	
Sub cable (1-core)	CN-71-C1	Length: 1 m 3.281 ft	0.15 mm ² 1-core cabtyre cable, with connector on one end Cable outer diameter: ø3.0 mm ø0.118 in Connectable to a main cable up to 15 cables.
	CN-71-C2	Length: 2 m 6.562 ft	
	CN-71-C5	Length: 5 m 16.404 ft	


Main cable

- **CN-73-C□**



Sub cable

- **CN-71-C□**




For FX-502(P)

Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Model No.	Description	
Main cable (4-core)	CN-74-C1	Length: 1 m 3.281 ft	0.15 mm ² 4-core cabtyre cable, with connector on one end Cable outer diameter: ø3.0 mm ø0.118 in
	CN-74-C2	Length: 2 m 6.562 ft	
	CN-74-C5	Length: 5 m 16.404 ft	
Sub cable (2-core)	CN-72-C1	Length: 1 m 3.281 ft	0.15 mm ² 2-core cabtyre cable, with connector on one end Cable outer diameter: ø3.0 mm ø0.118 in Connectable to a main cable up to 15 cables.
	CN-72-C2	Length: 2 m 6.562 ft	
	CN-72-C5	Length: 5 m 16.404 ft	


Main cable

- **CN-74-C□**




Sub cable

- **CN-72-C□**



End plates


End plates are not supplied with the amplifier. Please order them separately when the amplifiers are mounted in cascade.

Appearance	Model No.	Description
	MS-DIN-E	When cascading multiple amplifiers, or when it moves depending on the way it is installed on a DIN rail, these end plates clamp amplifiers into place on both sides. Make sure to use end plates when cascading multiple amplifiers together. Two pcs. per set

OPTIONS


Amplifier mounting bracket

- **MS-DIN-2**



Amplifier protection seal

- **FX-MB1**
10 sets of 2 communication window seals and 1 connector seal



SPECIFICATIONS

Item	Model No.	Type	Standard type	2-output type	Cable type
		NPN output	FX-501	FX-502	FX-505-C2
		PNP output	FX-501P	FX-502P	FX-505P-C2
Supply voltage		12 to 24 V DC ⁺¹⁰ ₋₁₅ % Ripple P-P 10 % or less			
Power consumption		Normal operation: 960 mW or less (current consumption 40 mA or less at 24 V supply voltage, excluding analog output of cable type) ECO mode: 680 mW or less (current consumption 28 mA or less at 24 V supply voltage, excluding analog output of cable type)			
Output (2-output type and cable type: Output 1, Output 2)			<NPN output type> NPN open-collector transistor <ul style="list-style-type: none">Maximum sink current: 100 mA (2-output type and cable type are 50 mA) (Note 2)Applied voltage: 30 V DC or less (between output and 0 V)Residual voltage: 2 V or less (Note 3) (at maximum sink current)	<PNP output type> PNP open-collector transistor <ul style="list-style-type: none">Maximum source current: 100 mA (2-output type and cable type are 50 mA) (Note 2)Applied voltage: 30 V DC or less (between output and +V)Residual voltage: 2 V or less (Note 3) (at maximum source current)	
	Output points		1 point	2 points	
	Output operation		Switchable either Light-ON or Dark-ON by L/D mode		
	Short-circuit protection		Incorporated		
Response time		H-SP: 25 μs or less, FAST: 60 μs or less, STD: 250 μs or less, LONG: 2 ms or less, U-LG: 4 ms or less, HYPR: 24 ms or less, selectable			
Analog output (Cable type only)		Output current: 4 to 20 mA approx. [H-SP, FAST STD: At 0 to 4,000 digits, LONG: At 0 to 8,000 digits (Note 4)], Response time: 2 ms or less, Zero point: Within 4 mA ±1 % F.S., Span: Within 16 mA ±5 % F.S., Linearity: Within ±3 % F.S., Load resistance: 0 to 250 Ω			
External input (2-output type only, switchable with Output 2)		<div>_____</div>		<NPN output type> NPN non-contact input <ul style="list-style-type: none">Signal condition High: +8 V to +V DC or Open Low: 0 to +1.2 V DC (at 0.5 mA source current)Input impedance: 10 kΩ approx.	<PNP output type> PNP non-contact input <ul style="list-style-type: none">Signal condition High: +4 V to +V DC (at 3 mA sink current) Low: 0 to +0.6 V DC or OpenInput impedance: 10 kΩ approx.
Possible external input function		<div>_____</div>		Emission halt / Teaching (Full-auto, Limit, 2-point) / Logic operation setting / Copy lock / Display adjustment / Data bank load / Data bank save, selectable	
Sensitivity setting		2-point teaching / Limit teaching / Full-auto teaching / Manual adjustment			
Incident light intensity display range		H-SP / FAST / STD: 0 to 4,000, LONG: 0 to 8,000, U-LG / HYPR: 0 to 9,999			
Timer function		Incorporated with variable OFF-delay / ON-delay / ONE SHOT / ON-delay • OFF-delay / ON-delay • ONE SHOT timer, switchable either effective or ineffective		<Output 1> Incorporated with variable OFF-delay / ON-delay / ONE SHOT / ON-delay • OFF-delay / ON-delay • ONE SHOT timer, switchable either effective or ineffective	
				<Output 2> Incorporated with variable OFF-delay / ON-delay / ONE SHOT timer, switchable either effective or ineffective	
Timer period		Timer range "ms": 0.5 ms approx., 1 to 9,999 ms approx., 1 ms approx., Timer range "sec.": 0.5 s approx., 1 to 32 s approx., 1 s approx., Timer range "1/10 ms": 0.05 ms approx., 0.1 to 999.9 ms approx., 0.1 ms approx., each output is set individually			
Light emitting amount selection function		Incorporated, 3 levels (each level 25 to 100 %) + Auto setting [1 level (25 to 100 %) when using H-SP mode]			
Interference prevention function		Incorporated (Note 5), selectable either automatic interference prevention or different frequency			
Various settings		Hysteresis setting / Shift amount setting / Emission power setting / Display turning setting / ECO setting / Data bank loading saving setting / Copying setting / Code setting / Reset setting / Logical calculation setting / Threshold tracking setting, etc.			
Protection		IP40 (IEC)			
Ambient temperature		-10 to +55 °C +14 to +131 °F [If 4 to 7 units are mounted in cascade: -10 to +50 °C +14 to +122 °F or if 8 to 16 units (cable type: 8 to 12 units) are mounted in cascade: -10 to +45 °C +14 to +113 °F] (No dew condensation or icing allowed), Storage: -20 to +70 °C -4 to +158 °F			
Emitting element (modulated)		Red LED (Peak emission wavelength: 643 nm 0.025 mil)			
Material		Enclosure, Case cover: Polycarbonate, Switch: Polyacetal			
Cable		<div>_____</div>			0.2 mm ² 6-core cabtyre cable, 2 m 6.562 ft long
Cable extension		<div>_____</div>			Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable. (however, supply voltage 12 V DC)
Weight		Net weight: 15 g approx., Gross weight: 70 g approx.			Net weight: 60 g approx., Gross weight: 100 g approx.
Accessory		FX-MB1 (Amplifier protection seal): 1 set			

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) 50 mA max. if 5 or more standard types are connected together. (25 mA in case of 2-output type and cable type)

3) In case of using the quick-connection cable (cable length 5 m **16.404 ft**) (optional).

4) If display adjustment was conducted, it is not in this range.

5) Number of sensor heads which is possible to be mounted closely in auto interference prevention function depends on response time as shown in table below. Number of sensor heads which is possible to be mounted closely in different frequency Interference prevention function is up to 3 units.

• Number of sensor heads mountable closely (Unit: set)


Response time	H-SP	FAST	STD	LONG	U-LG	HYPR
IP-1	0	2	4	8	8	12

I/O CIRCUIT AND WIRING DIAGRAMS

FX-501


NPN output type

I/O circuit diagram

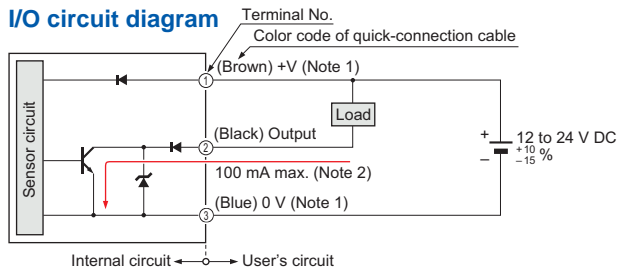


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 50 mA max., if five amplifiers, or more, are connected together.

Wiring diagram

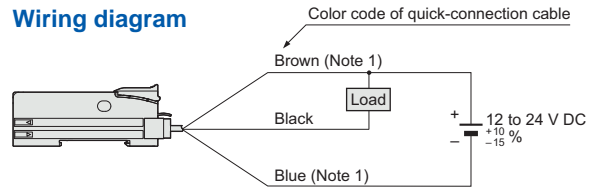

Note: The quick-connection sub cable does not have brown lead wire and blue lead wire.


Terminal arrangement diagram



FX-501P


PNP output type

I/O circuit diagram

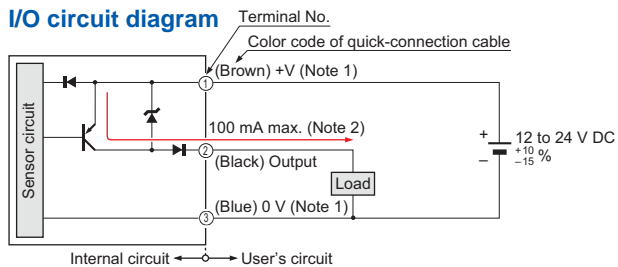


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 50 mA max., if five amplifiers, or more, are connected together.

Wiring diagram

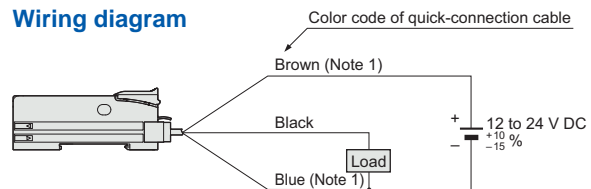

Note: The quick-connection sub cable does not have brown lead wire and blue lead wire.


Terminal arrangement diagram



FX-502


NPN output type

I/O circuit diagram

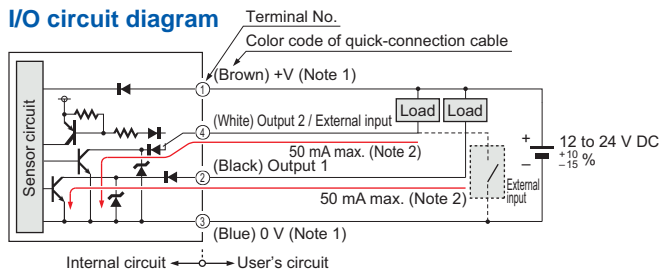


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 25 mA max., if five amplifiers, or more, are connected together.

Wiring diagram

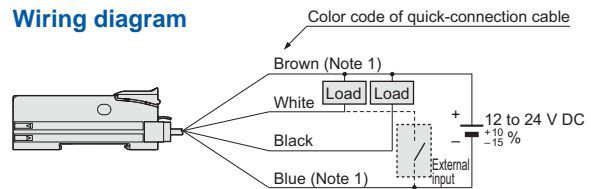

Note: The quick-connection sub cable does not have brown lead wire and blue lead wire.


Terminal arrangement diagram

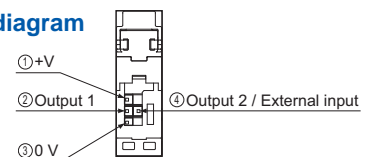

FX-502P


PNP output type

I/O circuit diagram

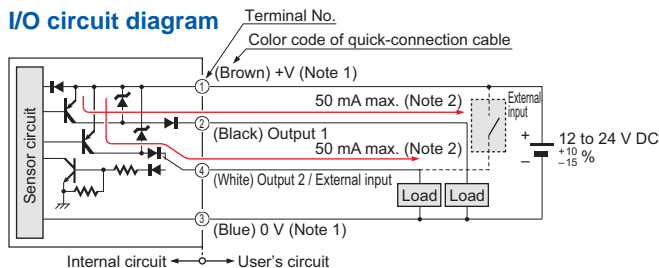


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
2) 25 mA max., if five amplifiers, or more, are connected together.

Wiring diagram

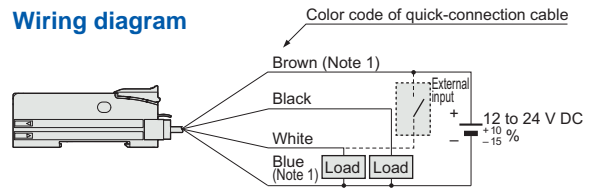

Note: The quick-connection sub cable does not have brown lead wire and blue lead wire.

Terminal arrangement diagram

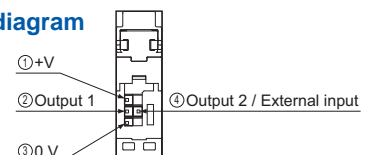


I/O CIRCUIT AND WIRING DIAGRAMS


FX-505-C2

NPN output type

I/O circuit diagram

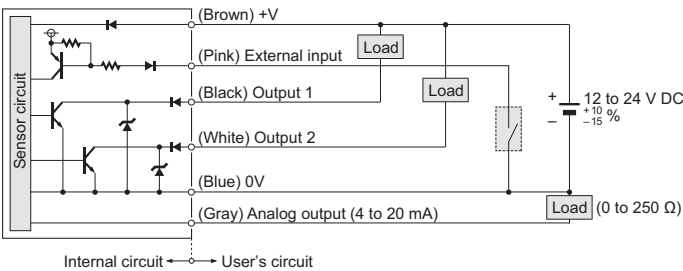


Wiring diagram

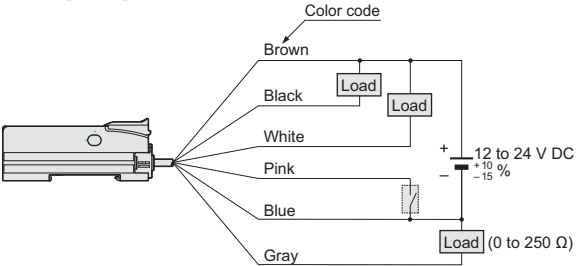


FX-505P-C2

PNP output type

I/O circuit diagram

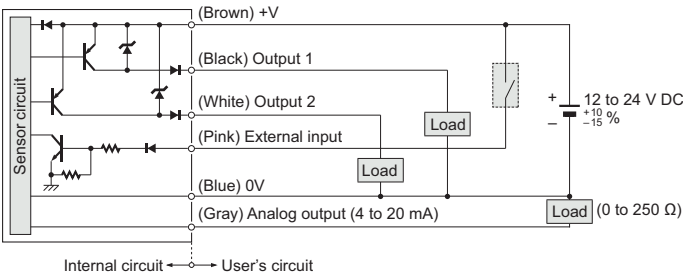

Wiring diagram

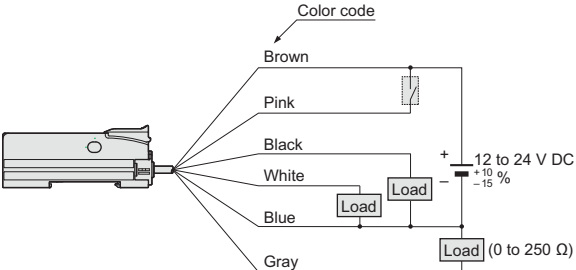

LIST OF FIBERS

Tough : It is a fiber which possesses both unbreakable (bending radius: R10 mm, reciprocating bending: 180°) and bendable (bending radius: R4 mm or less) features.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut (Note 1)	Sensing range FX-500 STD mode (mm in)
Super quality	Thru-beam	M3	Tough R2 Bending durability	2 m	400 15.748
		M4	Tough R4 Bending durability		1,200 47.244
		ø1.5	Tough R2 Bending durability		400 15.748
		ø3	Tough R4 Bending durability		1,200 47.244
	Reflective (Note 2)	M3	Tough R2 Bending durability		160 6.299
		M4	Tough R2 Bending durability		520 20.472
		M6	Tough R4 Bending durability		160 6.299
	Cylindrical	ø3	Tough R4 Bending durability		160 6.299
		ø3	Tough R4 Bending durability		160 6.299
		ø3	Tough R4 Bending durability		160 6.299
Thru-beam	M3	FT-31	Tough R2 Bending durability	2 m	315 12.402
		FT-31W	R1		260 10.236
		FT-43	R4 Bending durability		1,400 55.118
		FT-42	Tough R4 Bending durability		1,130 44.488
		FT-42W	R1		800 31.496
		FT-45X	R4		1,200 47.244
	M4	FT-R40	Tough R4 Bending durability	1 m	930 36.614
		FT-R41W	R1		800 31.496
		FT-R42W	R1		2,200 86.614
	Elbow	FT-140	Tough R4 Bending durability	10 m	19,600 771.654 (Note 3)
		FT-140	Tough R4 Bending durability		19,600 771.654 (Note 3)
		FT-140	Tough R4 Bending durability		19,600 771.654 (Note 3)
	Square head	FT-140	Tough R4 Bending durability	10 m	19,600 771.654 (Note 3)
		FT-140	Tough R4 Bending durability		19,600 771.654 (Note 3)
		FT-140	Tough R4 Bending durability		19,600 771.654 (Note 3)
	Long range	FT-140	Tough R4 Bending durability	10 m	19,600 771.654 (Note 3)
		FT-140	Tough R4 Bending durability		19,600 771.654 (Note 3)
		FT-140	Tough R4 Bending durability		19,600 771.654 (Note 3)
Reflective (Note 2)	M3	FD-31	Tough R2 Bending durability	2 m	125 4.921
		FD-31W	R1		80 3.150
		FD-32G	Tough R2 Bending durability		200 7.874
		FD-32GX	R2		200 7.874
		FD-EG30	R4		48 1.890
		FD-EG31	R4		20 0.787
	Ultra-small diameter	FD-EG30	R4	500 mm	48 1.890
		FD-EG31	R4		20 0.787
		FD-EG30	R4		48 1.890
		FD-EG31	R4		20 0.787

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut (Note 1)	Sensing range FX-500 STD mode (mm in)
Thru-beam	M4	FD-41	Tough R2 Bending durability	2 m	125 4.921
		FD-41W	R1		270 10.630
		FD-42G	Tough R2 Bending durability		200 7.874
		FD-42GW	R1		150 5.906
	M6	FD-62	R4 Bending durability		520 20.472
		FD-61	Tough R4 Bending durability		450 17.717
		FD-61W	R1		270 10.630
		FD-61G	Tough R4 Bending durability		420 16.535
	Stainless-jacketed	FD-64X	R4		280 11.024
		FD-R60	Tough R4 Bending durability		290 11.417
Cylindrical	Thru-beam	FT-S11	Tough R2 Bending durability	2 m	90 3.543
		FT-S21	Tough R2 Bending durability		315 12.402
		FT-S21W	R1		260 10.236
		FT-S32	R10 Bending durability		3,100 122.047
	Ultra-small diameter	FT-S31W	R1		800 31.496
		FT-E13	Tough R2 Bending durability		15 0.591
		FT-E23	Tough R2 Bending durability		75 2.953
		FT-V40	Tough R4 Bending durability		3,500 137.795
	Side-view	FD-S21	Tough R2 Bending durability		80 3.150
		FD-S32	Tough R4 Bending durability		420 16.535
		FD-S32W	R1		270 10.630
		FD-S31	Tough R2 Bending durability		125 4.921
Reflective (Note 2)	Ultra-small diameter	FD-S33GW	R1	1 m	150 5.906
		FD-E13	R4		12 0.472
		FD-E23	R4		55 2.165
		FD-E23	R4		55 2.165

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.
3) The fiber cable length practically limits the sensing range.
4) The allowable cutting range is 700 mm 27.559 in from the end that the amplifier inserted.

LIST OF FIBERS

Tough : It is a fiber which possesses both unbreakable (bending radius: R10 mm, reciprocating bending: 180°) and bendable (bending radius: R4 mm or less) features.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length 3< : Free-cut (Note 1)	Sensing range FX-500 STD mode (mm in)
Sleeve	Thru-beam	M3	Tough	R2 Bending durability (Note 3)	315 12.402
	Thru-beam	M4	Tough	R4 Bending durability (Note 3)	1,130 44.488
	Ultra-small diameter	ø3	Tough	R2 Bending durability	15 0.591
	Ultra-small diameter	ø3	Tough	R2 Bending durability	75 2.953
	Side-view	ø2	Tough	R4 Bending durability	450 17.717
		ø2	Tough	R2 Bending durability	240 9.449
	Side-view	ø2.5	Tough	R1	110 4.331
	Side-view	ø2.5	Tough	R4 Bending durability	680 26.772

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length 3< : Free-cut (Note 1)	Sensing range FX-500 STD mode (mm in)
Sleeve	Thru-beam	M3	Tough	R4	1 m 1.969
	Thru-beam	M4	Tough	R2 Bending durability (Note 3)	125 4.921
	Thru-beam	M4	Tough	R1 (Note 3)	80 3.150
	Thru-beam	M6	Tough	R4 Bending durability (Note 3)	420 16.535
	Side-view	ø1.5	Tough	R4	12 0.472
		ø3	Tough	R2 Bending durability	55 2.165
	Side-view	ø3	Tough	R1	20 0.787
	Side-view	ø5	Tough	R4 Bending durability	120 4.724

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.
3) Bending radius of sleeve part is R10 mm or more.

Type	Designation	Shape of fiber head (mm)	Spot diameter (mm in) (Note)	Distance to focal point (mm in) (Note)	Lens		Applicable fibers								
					Model No.	Ambient temp.	Model No.	Fiber cable length : Free-cut	Bending radius (mm)	Protection	Ambient temp.				
Small spot	Finest spot lens		ø0.1 ø0.004	7±0.5 0.276±0.020	FX-MR6	-20 to +60 °C	FD-EG31	500 mm		IP40	-20 to +60 °C				
		FD-EG30	-40 to +70 °C												
			ø0.4 ø0.016				FD-42G	2 m	Bending durability		-55 to +80 °C				
							FD-42GW				-40 to +60 °C				
							FD-32G		Bending durability		-55 to +80 °C				
							FD-32GX				1 m				
			ø0.15 ø0.006		7.5±0.5 0.295±0.020	FX-MR3	-40 to +70 °C	FD-EG31	500 mm			-20 to +60 °C			
								FD-EG30				-40 to +70 °C			
									ø0.5 ø0.020		FD-42G	2 m	Bending durability	-55 to +80 °C	
											FD-42GW			-40 to +60 °C	
	FD-32G	Bending durability	-55 to +80 °C												
	FD-32GX		1 m												
	Pinpoint spot lens		ø0.5 ø0.020	6±1 0.236±0.039	FX-MR1	-40 to +70 °C	FD-42G	2 m			-55 to +80 °C				
	Zoom lens		ø0.7 to ø2.0 ø0.028 to ø0.079		Approx. 18.5 to 43 Approx. 0.728 to 1.693	FX-MR2	-40 to +70 °C		FD-42GW			-40 to +60 °C			
FD-42G										-55 to +80 °C					
FD-42GW										-40 to +60 °C					
Zoom lens (Side-view type)									ø0.5 to ø3.0 ø0.020 to ø0.118		Approx. 13 to 30 Approx. 0.512 to 1.181	FX-MR5	-40 to +70 °C	FD-42G	
	FD-42GW		-40 to +60 °C												

Note: Spot diameter and distance to focal point are specified for FX-500/FX-100 series.

LIST OF FIBERS

Tough : It is a fiber which possesses both unbreakable (bending radius: R10 mm, reciprocating bending: 180°) and bendable (bending radius: R4 mm or less) features.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut (Note 1)	Sensing range FX-500 STD mode (mm in)
Flat	Thru-beam	Top sensing W3 × H8 × D12 	Tough R2 Bending durability	2 m	3,500 137.795
		Top sensing W3 × H8 × D12 	R1		
		Side sensing W3 × H12 × D8 	Tough R2 Bending durability		
		Side sensing W3 × H12 × D8 	R1		
		Front sensing W8.5 × H12 × D3 	Tough R2 Bending durability		
		Front sensing W8.5 × H12 × D3 	R1		
	With boss	Front sensing W10 × H7 × D2 	R1	1 m	620 24.409
		Fiber bending type W2 × H10 × D10 			
		Front sensing W14 × H7 × D3.5 			
		Fiber bending type W3.5 × H14 × D11 			
		Front sensing W10 × H7 × D2 		1 m	1 to 65 0.039 to 2.559
		Fiber bending type W2 × H10 × D10 			
	With boss	Front sensing W14 × H7 × D3.5 			
		Fiber bending type W3.5 × H14 × D11 			
	Thru-beam		Tough R2 Bending durability	2 m	3,600 141.732 (Note 3)
			Tough		
			R1		
			Tough R2 Bending durability		
			R1		
			Tough		
	Retroreflective (Note 4)	Top sensing W5.2 × H9.5 × D21 W10.6 × H28 × D10.1 	Tough R2 Bending durability	2 m	20 to 300 0.787 to 11.811
		Side sensing W9.5 × H25 × D5.2 W28 × H10.6 × D10.1 	Tough		
		Long range W5.2 × H9.5 × D16 	R1		

Type		Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut (Note 1)	Sensing range	
Thru-beam	Wide beam		Tough FT-A32	R2 Bending durability	2 m	3,600 141.732 (Note 3)	
			FT-A32W	R1			
			Tough FT-A11	R2 Bending durability			
			FT-A11W	R1			
	Array		Tough FT-AL05	R2 Bending durability		860 33.858	
Reflective (Note 2)	Wide beam		Tough FD-A16	R4 Bending durability		200 7.874	
	Array		Tough FD-AL11	R2 Bending durability		320 12.598	
Convergent Reflective (Note 5)	Glass substrate detection		FD-L32H	R4 Bending durability	4 m	0 to 56 0 to 2.205	
			FD-L30A	R2 Bending durability	3 m	0 to 43 0 to 1.693	
			FD-L31A	R4 Bending durability		4 to 33 0.157 to 1.299	
			FD-L22A	R2 Bending durability	2 m	0 to 24 0 to 0.945	
			FD-L23		3 m	0 to 29 0 to 1.142	
			FD-L11	R4 Bending durability	2 m	0 to 9.5 0 to 0.374	
			FD-L10			0 to 5 0 to 0.197	
			FD-L21	R2 Bending durability	2 m	1.5 to 16 0.059 to 0.630	
			FD-L21W	R1		3 to 14 0.118 to 0.551	
	General purpose		Tough FD-L20H	R2 Bending durability		23 0.906	
	Ultra-small		FD-L12W	R1	1 m	8 0.315	
Retroreflective (Note 4)	With polarizing filters		FR-Z50HW	R1	2 m	100 to 990 3.937 to 38.976	
	Wafer mapping		Tough FR-KZ22E			15 to 310 0.591 to 12.205	
	Narrow beam	Top sensing		Tough FR-KZ50H		R2 Bending durability	20 to 300 0.787 to 11.811
		Side sensing		Tough FR-KZ50E			

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.
3) The fiber cable length practically limits the sensing range.
4) The sensing range is the possible setting range for the attached reflector. The fiber can detect an object less than setting range for the reflector.
5) The sensing range is specified for transparent glass 100 × 100 × 10.7 mm 3.937 × 3.937 in (FD-L32H: R edge, FD-L21 and FD-L21W: t2 mm 0.079 in) (FD-L20H: white non-glossy paper, FD-L10: silicon wafers 100 × 100 mm 3.937 × 3.937 in).

LIST OF FIBERS

Tough : It is a fiber which possesses both unbreakable (bending radius: R10 mm, reciprocating bending: 180°) and bendable (bending radius: R4 mm or less) features.

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut (Note 1)	Sensing range FX-500 STD mode (mm in)
Chemical-resistant	Thru-beam Easy mounting • Rectangular head SEMI S2 compliant W7 × H15 × D13 Heat-resistant 115 °C ø5.5 (25) Side-view ø5.5 (25)	FT-Z802Y	R25	2 m	3,100 122.047
		FT-HL80Y	R30	2 m (Note 3)	3,600 141.732 (Note 2)
		FT-L80Y			
		FT-V80Y			
Heat-resistant	Thru-beam	Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27	R25	2 m	430 16.929
		Allows flexible wiring Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27	R10	1 m	470 18.504
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27	R25	1 m	540 21.260
		Lens mountable (FX-LE2 only) Sleeve 60 mm ø2.1 27			700 27.559
		Lens mountable (FX-LE2 only) Sleeve 60 mm ø2.1 27			700 27.559
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27	Heat-resistant side R18 (Note 5)	200 mm (Note 6)	470 18.504
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27			
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27			
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27			
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27			
	Joint	Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27	Heat-resistant side R18 (Note 5)	300 mm (Note 6)	470 18.504
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27			
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27			
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27			
		Lens mountable (FX-LE1/L2/SV1) Sleeve 60 mm ø2.1 27			
	Reflective (Note 7)	Coaxial Sleeve 60 mm ø2.8 22	R25	2 m	260 10.236
		Coaxial Sleeve 60 mm ø2.8 22	R25	1 m	330 12.992
		Coaxial Sleeve 60 mm ø2.8 22			
		Coaxial Sleeve 60 mm ø2.8 22			
		Coaxial Sleeve 60 mm ø2.8 22	R25	1 m	230 9.055
		Coaxial Sleeve 60 mm ø2.8 22			
		Coaxial Sleeve 60 mm ø2.8 22			
		Coaxial Sleeve 60 mm ø2.8 22	R25	1 m	350 13.780
		Coaxial Sleeve 60 mm ø2.8 22			
		Coaxial Sleeve 60 mm ø2.8 22			
Convergent reflective (Note 7)	Glass substrate detection	W19 × H27 × D5	R25	2 m	17 0.669
		W21 × H33.2 × D5	R25	3 m	1.5 to 26 0.059 to 1.024
		W21 × H34.5 × D5			5 to 42 0.197 to 1.654
		W19 × H27 × D5			16 0.630

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut (Note 1)	Sensing range FX-500 STD mode (mm in)
Vacuum-resistant	Thru-beam 300 °C Lens mountable (FV-LE1/SV2) M4 30	FT-H30-M1V-S (Note 9)	R18	1 m	270 10.630
	Reflective (Note 8) 300 °C, Rectangular head W9.5 × H5.2 × D15	FD-H30-KZ1V-S (Note 9)			20 to 200 0.787 to 7.874
	Convergent reflective (Note 8) 300 °C, Glass substrate detection W19 × H5 × D27	FD-H30-L32V-S (Note 9)			8 0.315
Metal-free	Thru-beam M4 15	FT-41	R25	2 m	1,100 43.307
	Thru-beam M4 25	FD-G40			140 5.512
	Thru-beam M6 20	FD-G60			420 16.535
Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length Free-cut (Note 1)	Sensing range FX-500 STD mode (mm in)
Heat-resistant	Contact type Liquid level sensing Heat resistant 125 °C Fluorine resin coating ø6 Heat resistant 105 °C Fluorine resin coating ø4 Heat resistant 70 °C Fluorine resin coating throughout the fiber ø4	FD-F8Y	Protective tube R40 Fiber R15	2 m (Note 10)	Liquid surface not contacted: Beam received, Liquid surface contacted: Beam not received
		FD-HF40Y	Protective tube R20 Fiber R10	2 m	Beam received, Liquid surface contacted: Beam not received
		FD-F41Y	Protective tube R20 Fiber R10	2 m	Beam received, Liquid surface contacted: Beam not received
		FD-F71	R4 Bending durability	5 m	Leak absent: Beam received, Leak present: Beam interrupted
		FD-F41	R10	2 m	Leak absent: Beam received, Leak present: Beam interrupted
	Pipe-mountable type Liquid level sensing Standard W25 × H13 × D20 For 1 mm thick PFA pipe W25 × H13 × D20 Mountable on pipe-array fiber W6.5 × H28.3 × D17 SEMI S2 compliant	FD-F41	R10	2 m	Leak absent: Beam received, Leak present: Beam interrupted
		FD-F4	R4 Bending durability	2 m	Liquid absent: Beam not received, Liquid present: Beam received
		FD-FA93	R4 Bending durability	2 m	Liquid absent: Beam not received, Liquid present: Beam received
	Thru-beam Liquid sensing SEMI S2 compliant W23 × H20 × D17	FT-F93	Protective tube R20 Fiber R2 Bending durability	2 m	Liquid absent: Beam not received, Liquid present: Beam received
		FT-F93	Protective tube R20 Fiber R2 Bending durability	2 m	Liquid absent: Beam not received, Liquid present: Beam received

- Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.
3) The allowable cutting range is 500 mm 19.685 in from the end that the amplifier inserted.
4) Heat-resistant side fiber + ordinary temperature fiber (FT-FM2, From production since October, 2012: FT-42) are sold together as a set.
5) R25 mm R0.984 in or more for ordinary temperature side.
6) Fiber length (fixed-length) for heat-resistant fiber side. Fiber length for ordinary temperature side is 2 m 6.562 ft (free-cut).
7) The sensing range of reflective type is the value for white non-glossy paper (50 × 50 mm 1.969 × 1.969 in glass substrate for FD-H30-L32, FD-H18-L31, transparent glass 100 × 100 × 10.7 mm 3.937 × 3.937 × 0.028 in for FD-H25-L43 and FD-H25-L45).
8) The sensing range of reflective type is the value for transparent glass 100 × 100 × 10.7 mm 3.937 × 3.937 × 0.028 in.
9) Sold as a set comprising vacuum type fiber + photo-terminal (FV-BR1) + fiber at atmospheric side (FT-J8).
10) The allowable cutting range is 1,000 mm 39.370 in from the end that the amplifier inserted.

PRECAUTIONS FOR PROPER USE



- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

Wiring

- Make sure that the power supply is OFF while adding or removing the amplifiers.
- Note that if a voltage exceeding the rated range is applied, or if an AC power supply is directly connected, the product may get burnt or damaged.
- Note that short-circuit of the load or wrong wiring may burn or damage the product.
- Do not run the wires together with high-voltage lines or power lines, or put them in the same raceway. This can cause malfunction due to induction.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this product, connect the frame ground (F.G.) terminal of the equipment to an actual ground.
- Make sure to use the quick-connection cable (optional) for the connection of the controller.
Extension up to total 100 m [328.084 ft](#) is possible with 0.3 mm² or more, cable.
However, in order to reduce noise, make the wiring as short as possible.
- Make sure that stress by forcible bending or pulling is not applied to the sensor cable joint and fiber cable.

Others

- This product has been developed / produced for industrial use only.
- The specification may not be satisfied in a strong magnetic field.
- The ultra long distance (U-LG, HYPR) mode is more likely to be affected by extraneous noise since the sensitivity of that is higher than the other modes. Make sure to check the environment before use.
- Do not use during the initial transient time (H-SP, FAST, STD: 0.5 sec., LONG, U-LG, HYPR: 1 sec.) after the power supply is switched ON.
- This product is suitable for indoor use only.
- Avoid dust, dirt, and steam.
- Make sure that the product does not come in contact with oil, grease, organic solvents such as thinner, etc., strong acid or alkaline.
- This product cannot be used in an environment containing inflammable or explosive gases.
- Never disassemble or modify this product.
- This product adopts EEPROM. Settings cannot be done 100 thousand times or more because of the EEPROM's lifetime.

Disclaimer

The applications described in the catalog are all intended for examples only.

The purchase of our products described in the catalog shall not be regarded as granting of a license to use our products in the described applications.


We do NOT warrant that we have obtained some intellectual properties, such as patent rights, with respect to such applications, or that the described applications may not infringe any intellectual property rights, such as patent rights, of a third party.

■ DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from our website.

	FX-501(P)	FX-502(P)
● 最大出力	7.5kW	7.5kW
● 最大電流	16A	16A
● 最大電圧	208V	208V
● 最大トルク	1.9Nm	1.9Nm
● 最大回転数	3000rpm	3000rpm
● 最大速度	10m/min	10m/min
● 最大加速度	1000mm/s²	1000mm/s²
● 最大減速度	1000mm/s²	1000mm/s²
● 最大位置決め精度	±0.01mm	±0.01mm
● 最大繰り返し精度	±0.01mm	±0.01mm
● 最大動作時間	10min	10min
● 最大待機時間	10min	10min
● 最大消費電力	10W	10W
● 最大待機電力	10W	10W
● 最大騒音レベル	65dB(A)	65dB(A)
● 最大振動レベル	0.5mm/s²	0.5mm/s²
● 最大重量	10kg	10kg
● 最大寸法	100mm×100mm×100mm	100mm×100mm×100mm
● 最大価格	10万円	10万円


Amplifier

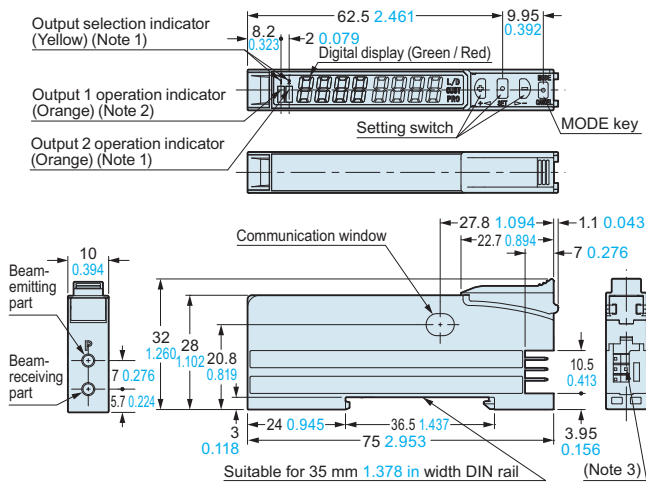

- Notes: 1) **FX-502(P)** only
2) **FX-501(P)**: Operation indicator
3) **FX-501(P)**: 3-pin, **FX-502(P)**: 4-pin

FX-505-C2 FX-505P-C2

Amplifier

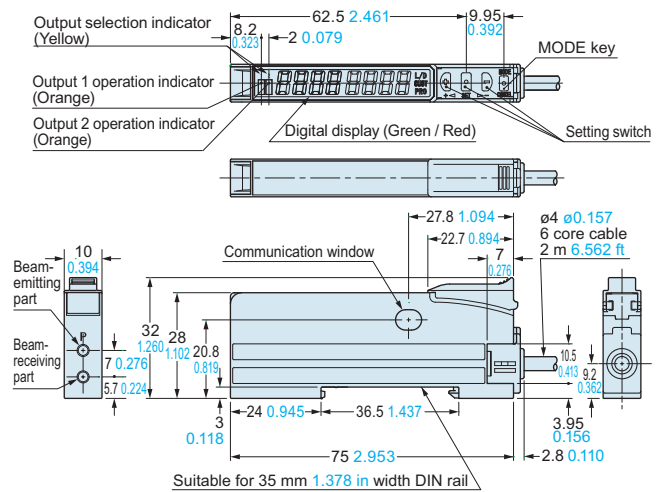


Note: The shape of setting switch and cable will be changed from production at the end of November, 2011. Please see drawing below.

CN-73-C **CN-74-C**

Main cable (Optional)

- Length L

Model No.	Length L
CN-73/74-C1	1,000 39.370
CN-73/74-C2	2,000 78.740
CN-73/74-C5	5,000 196.850

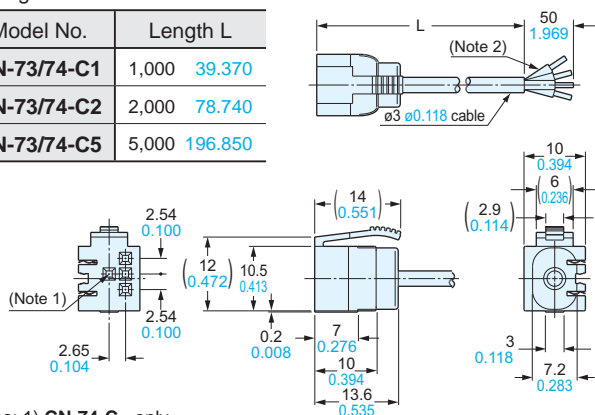


- Notes: 1) **CN-74-C□** only
2) **CN-73-C□**: 3-core

CN-71-C_□ CN-72-C_□

Sub cable (Optional)

- Length L


Model No.	Length L
CN-71/72-C1	1,000 39.370
CN-71/72-C2	2,000 78.740
CN-71/72-C5	5,000 196.850

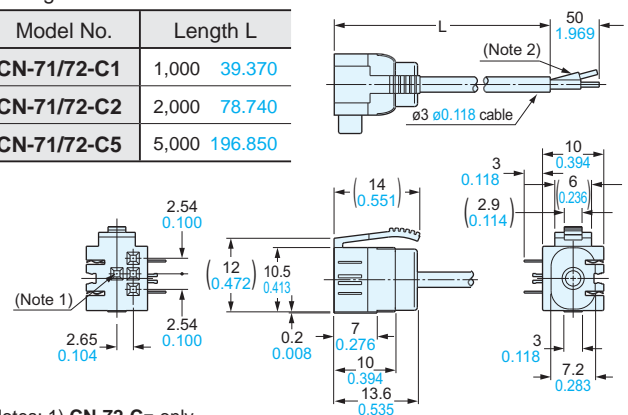

- Notes: 1) **CN-72-C**□ only
2) **CN-71-C**□: 1-core

MS-DIN-2


Amplifier mounting bracket (Optional)

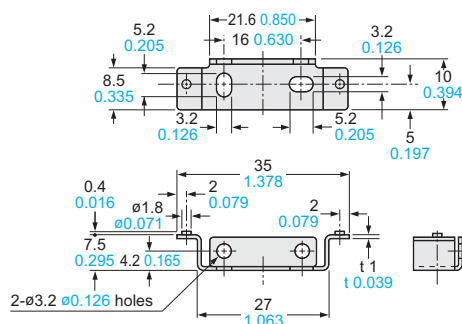

Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)

MS-DIN-E

End plate (Optional)

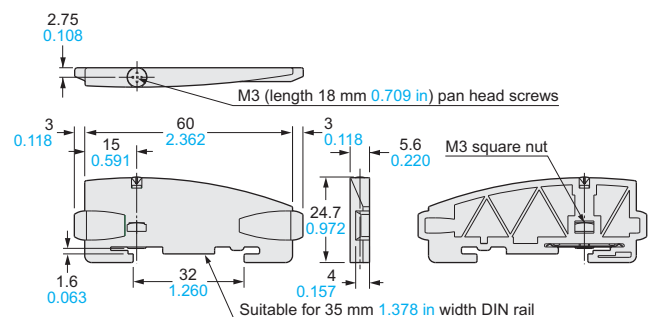

Material: Polycarbonate

Introduction of Related Products

Communication Unit for Open Network

SC-GU3 SERIES

The digital sensor can be connected directly
to the 3 types of open network!

Other types of analog input sensors can also be connected!



Scattered digital sensors can be centrally managed and set through an open network.

Applicable Digital Sensor	Digital Fiber Sensor FX-501 FX-502	Digital Laser Sensor LS-403	Digital Pressure Sensor DPS-401 DPS-402
------------------------------	---------------------------------------	--------------------------------	--

Please contact

Panasonic Industrial Devices SUNX Co., Ltd.

2431-1 Ushiyama-cho, Kasugai-shi, Aichi, 486-0901, Japan
■Telephone: +81-568-33-7211 ■Facsimile: +81-568-33-2631
Global Sales Department
■Telephone: +81-568-33-7861 ■Facsimile: +81-568-33-8591
panasonic.net/id/pidsx/global

Panasonic[®]

All Rights Reserved ©Panasonic Industrial Devices SUNX Co., Ltd. 2012