## **DATASHEET - NZMN2-A160**



Circuit-breaker, 3p, 160A

NZMN2-A160 Part no. Catalog No. 259092

**EL-Nummer** (Norway)

4315537






| Delivery program                            |                     |    |                             |
|---|---------------------|----|-----------------------------|
| Product range                               |                     |    | Circuit-breaker             |
| Protective function                         |                     |    | System and cable protection |
| Standard/Approval                           |                     |    | IEC                         |
| Installation type                           |                     |    | Fixed                       |
| Release system                              |                     |    | Thermomagnetic release      |
| Construction size                           |                     |    | NZM2                        |
| Number of poles                             |                     |    | 3 pole                      |
| Standard equipment                          |                     |    | Screw connection            |
| Switching capacity                          |                     |    |                             |
| 400/415 V 50 Hz                             | I <sub>cu</sub>     | kA | 50                          |
| Rated current = rated uninterrupted current |                     |    |                             |
| Rated current = rated uninterrupted current | $I_n = I_u$         | Α  | 160                         |
| Setting range                               |                     |    |                             |
| Overload trip                               |                     |    |                             |
| 中   | l <sub>r</sub>      | Α  | 125 - 160                   |
| Short-circuit releases                      |                     |    |                             |
| Non-delayed                                 | $I_i = I_n x \dots$ |    | 6 - 10                      |
| Short-circuit releases                      | I <sub>rm</sub>     | A  | 960 - 1600                  |

## **Technical data**

| General   |    |   |
|---|----|---|
| Standards   |    | IEC/EN 60947  |
| Protection against direct contact   |    | Finger and back of hand proof to VDE 0106 Part 100                          |
| Climatic proofing   |    | Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature   |    |   |
| Ambient temperature, storage  | °C | <sup>2</sup> C - 40 - + 70  |
| Operation   | °C | °C -25 - +70  |
| Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27 | g  | g 20 (half-sinusoidal shock 20 ms)  |
| Safe isolation to EN 61140  |    |   |
| Between auxiliary contacts and main contacts  | VA | V AC 500  |
| between the auxiliary contacts  | VA | V AC 300  |
| Mounting position   |    | Vertical and 90° in all directions  |



With XFI earth-fault release:
- NZM1, N1, NZM2, N2: vertical and

90° in all directions
with plug-in unit

- NZM1, N1, NZM2, N2: vertical, 90° right/left

with withdrawable unit:

- NZM3, N3: vertical, 90° right/left

- NZM4, N4: vertical with remote operator:

- NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions

|  | unecuons  |
|--|---|
| Direction of incoming supply           | as required   |
| Degree of protection                   |   |
| Device                                 | In the operating controls area: IP20 (basic degree of protection)     |
| Enclosures                             | With insulating surround: IP40 With door coupling rotary handle: IP66 |
| Terminations                           | Tunnel terminal: IP10 Phase isolator and strip terminal: IP00         |
| Other technical data (sheet catalogue) | Temperature dependency, Derating                                      |

#### **Circuit-breakers**

| Rated current = rated uninterrupted current | $I_n = I_u$      | Α    | 160  |
|---|------------------|------|------|
| Rated surge voltage invariability           | $U_{\text{imp}}$ |      |      |
| Main contacts                               |                  | V    | 8000 |
| Auxiliary contacts                          |                  | V    | 6000 |
| Rated operational voltage                   | U <sub>e</sub>   | V AC | 690  |
| Rated operational voltage                   | U <sub>e</sub>   | V DC | 750  |

The following settings are required in order to ensure correct tripping:

The fast-response release will take longer to respond when used for DC applications. Because of this, the setting on the trip block inscription, which is specified for AC currents, must be set to a lower value for DC currents.

 $\ensuremath{\mathsf{DC}}$  correction factor for instantaneous release response value:

o NZM1: 1.25

o NZM2: 1.35


o NZM3: 1.45


Example: NZM3 Ie = 500A. Desired DC tripping current: 10 \* Ie = 5000A.

#### Calculation:

- Desired DC value / correction factor = AC setting on trip block
- $\bullet$  5000A / 1.45 = 3448 A ~ 7 \* Ie = Value that needs to be set on the trip block

Permitted circuit configurations:





| Overvoltage category/pollution degree |    |   | 111/3 |
|---------------------------------------|----|---|-------|
| Rated insulation voltage              | Ui | V | 1000  |
| Use in unearthed supply systems       |    | V | ≦ 690 |

#### **Switching capacity**

| Rated short-circuit making capacity                   | I <sub>cm</sub> |    |     |
|---|-----------------|----|-----|
| 240 V   | I <sub>cm</sub> | kA | 187 |
| 400/415 V   | I <sub>cm</sub> | kA | 105 |
| 440 V 50/60 Hz  | I <sub>cm</sub> | kA | 74  |
| 525 V 50/60 Hz  | I <sub>cm</sub> | kA | 53  |
| 690 V 50/60 H   | Ic              | kA | 40  |
| Rated short-circuit breaking capacity I <sub>cn</sub> | I <sub>cn</sub> |    |     |

| Icu to IEC/EN 60947 test cycle 0-t-C0                                       | lcu             | kA              |   |
|---|-----------------|-----------------|---|
| 240 V 50/60 Hz  | I <sub>cu</sub> | kA              | 85  |
| 400/415 V 50/60 Hz  | I <sub>cu</sub> | kA              | 50  |
| 440 V 50/60 Hz  | I <sub>cu</sub> | kA              | 35  |
| 525 V 50/60 Hz  | I <sub>cu</sub> | kA              | 25  |
| 690 V 50/60 Hz  |                 | kA              | 20  |
|   | Icu             |                 |   |
| 500 V DC  | I <sub>cu</sub> | kA              | 30  |
| 750 V DC  | I <sub>cu</sub> | kA              | 30  |
| Ics to IEC/EN 60947 test cycle 0-t-C0-t-C0                                  | lcs             | kA              | 05  |
| 240 V 50/60 Hz  | I <sub>cs</sub> | kA              | 85  |
| 400/415 V 50/60 Hz  | I <sub>cs</sub> | kA              | 50  |
| 440 V 50/60 Hz  | I <sub>cs</sub> | kA              | 35  |
| 525 V 50/60 Hz  | I <sub>cs</sub> | kA              | 25  |
| 690 V 50/60 Hz  | I <sub>cs</sub> | kA              | 5   |
| 500 V DC  | I <sub>cs</sub> | kA              | 7.5   |
| 750 V DC  | I <sub>cs</sub> | kA              | 7.5   |
|   |                 |                 | Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker. |
| Rated short-time withstand current  |                 |                 |   |
| t = 0.3 s   | I <sub>cw</sub> | kA              | 1.9   |
| t=1 s   | I <sub>cw</sub> | kA              | 1.9   |
| Utilization category to IEC/EN 60947-2                                      |                 |                 | A   |
| Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release) | Operations      |                 | 20000   |
| Lifespan, electrical  |                 |                 |   |
| AC-1  |                 |                 |   |
| 400 V 50/60 Hz  | Operations      |                 | 10000   |
| 415 V 50/60 Hz  | Operations      |                 | 10000   |
| 690 V 50/60 Hz  | Operations      |                 | 7500  |
| AC3   |                 |                 |   |
| 400 V 50/60 Hz  | Operations      |                 | 6500  |
| 415 V 50/60 Hz  | Operations      |                 | 6500  |
| 690 V 50/60 Hz  | Operations      |                 | 5000  |
| DC-1  |                 |                 |   |
| 500 V DC  | Operations      |                 | 7500  |
| 750 V DC  | Operations      |                 | 7500  |
| DC - 3  |                 |                 | ****  |
| 500 V DC  | Operations      |                 | 3000  |
| 750 V DC  | Operations      | One/h           | 3000<br>120   |
| Max. operating frequency  Total break time at short-circuit                 |                 | Ops/h<br>ms     | <10   |
| Terminal capacity   |                 | 1113            |   |
| Standard equipment  |                 |                 | Screw connection  |
| Optional accessories  |                 |                 | Box terminal Tunnel terminal connection on rear   |
| Round copper conductor  |                 |                 |   |
| Box terminal  |                 |                 |   |
| Solid   |                 | mm <sup>2</sup> | 1 x (10 - 16)<br>2 x (6 - 16)   |
| Stranded  |                 | mm <sup>2</sup> | 1 x (25 - 185)<br>2 x (25 - 70)   |
| Tunnel terminal   |                 |                 |   |
| Solid   |                 | mm <sup>2</sup> | 1 x 16  |
| Stranded  |                 |                 |   |
| 1-hole  |                 | mm <sup>2</sup> | 1 x (25 - 185)  |
| Bolt terminal and rear-side connection                                      |                 |                 |   |
|   |                 |                 |   |

| Direct on the switch                                      |      |                 |                                      |
|---|------|-----------------|--------------------------------------|
| Solid   |      | mm <sup>2</sup> | 1 x (10 - 16)<br>2 x (6 - 16)        |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 185)<br>2 x (25 - 70)      |
| Al circular conductor                                     |      |                 |                                      |
| Tunnel terminal   |      |                 |                                      |
| Solid   |      | mm <sup>2</sup> | 1 x 16                               |
| Stranded  |      |                 |                                      |
| Stranded  |      | $\text{mm}^2$   | 1 x (25 - 185)                       |
| Bolt terminal and rear-side connection                    |      |                 |                                      |
| Direct on the switch                                      |      |                 |                                      |
| Solid   |      | mm <sup>2</sup> | 1 x (10 - 16)<br>2 x (10 - 16)       |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 50)<br>2 x (25 - 50)       |
| Cu strip (number of segments x width x segment thickness) |      |                 |                                      |
| Box terminal  |      |                 |                                      |
|   | min. | mm              | 2 x 9 x 0.8                          |
|   | max. | mm              | 10 x 16 x 0.8<br>(2x) 8 x 15.5 x 0,8 |
| Bolt terminal and rear-side connection                    |      |                 |                                      |
| Flat copper strip, with holes                             | min. | mm              | 2 x 16 x 0.8                         |
| Flat copper strip, with holes                             | max. | mm              | 10 x 24 x 0.8                        |
| Copper busbar (width x thickness)                         | mm   |                 |                                      |
| Bolt terminal and rear-side connection                    |      |                 |                                      |
| Screw connection  |      |                 | M8                                   |
| Direct on the switch                                      |      |                 |                                      |
|   | min. | mm              | 16 x 5                               |
|   | max. | mm              | 24 x 8                               |
| Control cables  |      |                 |                                      |
|   |      | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 1.5) |

### **Design verification as per IEC/EN 61439**

| Design vernication as per IEG/EN 01439   |                  |    |  |
|--|------------------|----|--|
| Technical data for design verification   |                  |    |  |
| Rated operational current for specified heat dissipation   | In               | Α  | 160  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub> | W  | 38.4   |
| Operating ambient temperature min.   |                  | °C | -25  |
| Operating ambient temperature max.   |                  | °C | 70   |
| IEC/EN 61439 design verification   |                  |    |  |
| 10.2 Strength of materials and parts   |                  |    |  |
| 10.2.2 Corrosion resistance  |                  |    | Meets the product standard's requirements.                         |
| 10.2.3.1 Verification of thermal stability of enclosures   |                  |    | Meets the product standard's requirements.                         |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                  |    | Meets the product standard's requirements.                         |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |    | Meets the product standard's requirements.                         |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                  |    | Meets the product standard's requirements.                         |
| 10.2.5 Lifting   |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact   |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions  |                  |    | Meets the product standard's requirements.                         |
| 10.3 Degree of protection of ASSEMBLIES  |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances   |                  |    | Meets the product standard's requirements.                         |
| 10.5 Protection against electric shock   |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components   |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections  |                  |    | Is the panel builder's responsibility.                             |
| 10.8 Connections for external conductors   |                  |    | Is the panel builder's responsibility.                             |
| 10.9 Insulation properties   |                  |    |  |


| 10.9.2 Power-frequency electric strength                 | Is the panel builder's responsibility.   |
|--|--|
| 10.9.3 Impulse withstand voltage                         | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                      | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## **Technical data ETIM 7.0**


Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013])


| Number of auxiliary contacts as change-over contact  With switched-off indicator  With under voltage release  No  Number of poles  Position of connection for main current circuit  Number of auxiliary contacts as change-over contact  No  Front side  | protection (eci@ss10.0.1-2/-3/-04-09 [AJZ/16013])         |    |  |
|--|---|----|--|
| Rated short-circuit breaking capacity lou at 400 V, 50 Hz         KA         50           Overload release current setting         A         125 - 160           Adjustment range short-term delayed short-circuit release         A         0 - 0           Adjustment range undelayed short-circuit release         A         960 - 1600           Integrated earth fault protection         B         No           Type of electrical connection of main circuit         Screw connection           Device construction         Built-in device fixed built-in technique           Suitable for DIN rail (top hat rail) mounting         Suitable for DIN rail (top hat rail) mounting optional         No           Number of auxiliary contacts as normally closed contact         Yes         0           Number of auxiliary contacts as change-over contact         Yes         0           With switched-off indicator         Yes         No           With under voltage release         No         No           Number of poles         3         No           Position of connection for main current circuit         Yes         Front side           Type of control element         Yes         Rocker lever           Complete device with protection unit         Yes         No           Motor drive integrated         Yes         Yes </td <td>Rated permanent current lu</td> <td>Α</td> <td>160</td>   | Rated permanent current lu                                | Α  | 160                                      |
| Overload release current setting         A         125 - 160           Adjustment range short-term delayed short-circuit release         A         0 - 0           Adjustment range undelayed short-circuit release         A         960 - 1600           Integrated earth fault protection         B         60 - 1600           Type of electrical connection of main circuit         Corew connection           Device construction         Built-in device fixed built-in technique           Suitable for DIN rail (top hat rail) mounting         W         W           Number of auxiliary contacts as normally closed contact         W         0           Number of auxiliary contacts as change-over contact         W         0           With switched-off indicator         W         0           With under voltage release         No         No           Number of poles         3         No           Position of connection for main current circuit         Font side         No           Type of control element         Font side         Rocker lever           Complete device with protection unit         Rocker lever         No           Motor drive optional         Yes         Rocker lever  | Rated voltage   | V  | 690 - 690                                |
| Adjustment range short-term delayed short-circuit release Adjustment range undelayed short-circuit release Adjustment range undelayed short-circuit release Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional DIN rail (top hat rail) mounting optional DIN rail (top hat rail) mounting optional Sumber of auxiliary contacts as normally closed contact Unmber of auxiliary contacts as normally open contact Unmber of auxiliary contacts as change-over contact Unmber of auxiliary contacts as change-over contact Unmber of pausiliary contacts as change-over contact Unmber of pausiliary contacts as change-over contact Unmber of poles Unmber of poles Vifth switched-off indicator Unmber of poles Vifth under voltage release Vignature of poles Vignature of poles Vignature of poles Vignature of poles Vignature of connection for main current circuit Vignature of connection for main current circuit Vignature of connection for main current circuit Vignature of control element Complete device with protection unit Vignature of vignated Vignature of  | Rated short-circuit breaking capacity Icu at 400 V, 50 Hz | kA | 50                                       |
| Adjustment range undelayed short-circuit release Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting SUIN rail (top hat rail) mounting optional Sunber of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Number of pauxiliary contacts as change-over contact Number of poles Number of poles Number of poles No No No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive integrated Motor drive optional   | Overload release current setting                          | Α  | 125 - 160                                |
| Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as normally open contac | Adjustment range short-term delayed short-circuit release | Α  | 0 - 0                                    |
| Type of electrical connection of main circuit  Device construction  Device construction  Suitable for DIN rail (top hat rail) mounting  DIN rail (top hat rail) mounting optional  Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  With switched-off indicator  With under voltage release  Number of poles  Number of poles  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive integrated  Motor drive optional   | Adjustment range undelayed short-circuit release          | Α  | 960 - 1600                               |
| Device construction Suitable for DIN rail (top hat rail) mounting Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of polex Number of polex Number of poles No   | Integrated earth fault protection                         |    | No                                       |
| Suitable for DIN rail (top hat rail) mounting optional DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Number of puxiliary contacts as change-over contact Nith switched-off indicator No  | Type of electrical connection of main circuit             |    | Screw connection                         |
| DIN rail (top hat rail) mounting optional  Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  Number of auxiliary contacts as change-over contact  Number of auxiliary contacts as change-over contact  No  With switched-off indicator  No  No  Number of poles  No  No  No  No  No  No  No  No  No  N  | Device construction                                       |    | Built-in device fixed built-in technique |
| Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  Number of auxiliary contacts as change-over contact  No  With switched-off indicator  With under voltage release  No  Number of poles  No  Number of poles  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive integrated  Motor drive optional  O  O  O  O  O  O  O  O  O  O  O  O  O   | Suitable for DIN rail (top hat rail) mounting             |    | No                                       |
| Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  With switched-off indicator  With under voltage release  No  Number of poles  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive integrated  Motor drive optional   | DIN rail (top hat rail) mounting optional                 |    | Yes                                      |
| Number of auxiliary contacts as change-over contact  With switched-off indicator  With under voltage release  No  Number of poles  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive integrated  Motor drive optional  O  O  O  O  O  O  O  O  O  O  O  O  O   | Number of auxiliary contacts as normally closed contact   |    | 0  |
| With switched-off indicator With under voltage release No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional No  | Number of auxiliary contacts as normally open contact     |    | 0  |
| With under voltage release  No  Number of poles  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive optional  No  No  No  No  No  No  No  No  No  N   | Number of auxiliary contacts as change-over contact       |    | 0  |
| Number of poles  Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive optional  Selected as a selec | With switched-off indicator                               |    | No                                       |
| Position of connection for main current circuit  Type of control element  Complete device with protection unit  Motor drive optional  Front side  Rocker lever  Rocker lever  Yes  No  Yes   | With under voltage release                                |    | No                                       |
| Type of control element Rocker lever  Complete device with protection unit Yes  Motor drive integrated No  Motor drive optional Yes  | Number of poles   |    | 3  |
| Complete device with protection unit  Yes  Motor drive optional  Yes  Yes  | Position of connection for main current circuit           |    | Front side                               |
| Motor drive optional No  Motor drive optional Yes  | Type of control element                                   |    | Rocker lever                             |
| Motor drive optional Yes   | Complete device with protection unit                      |    | Yes                                      |
| ·  | Motor drive integrated                                    |    | No                                       |
| Degree of protection (IP) IP20   | Motor drive optional                                      |    | Yes                                      |
|  | Degree of protection (IP)                                 |    | IP20                                     |

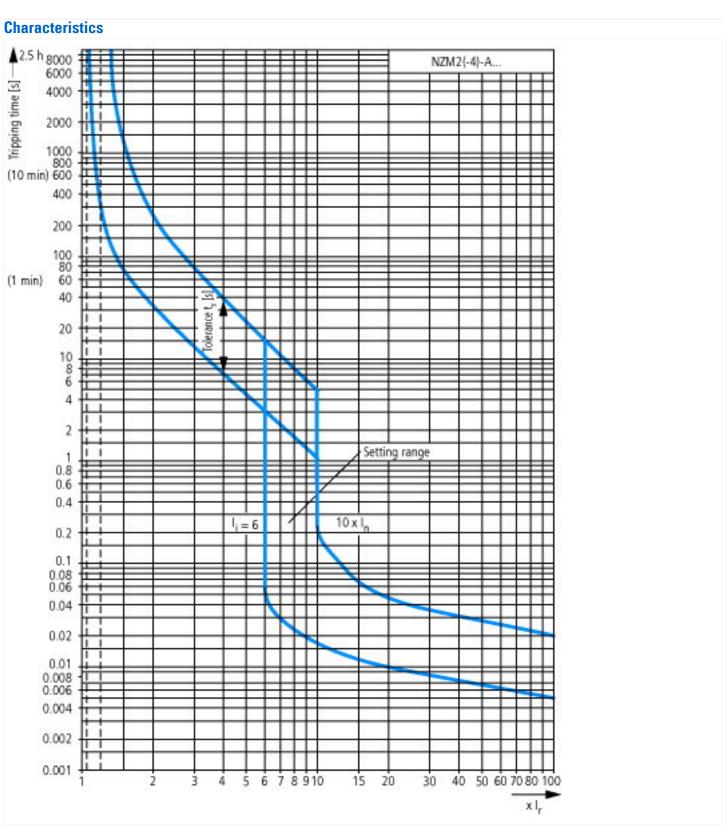

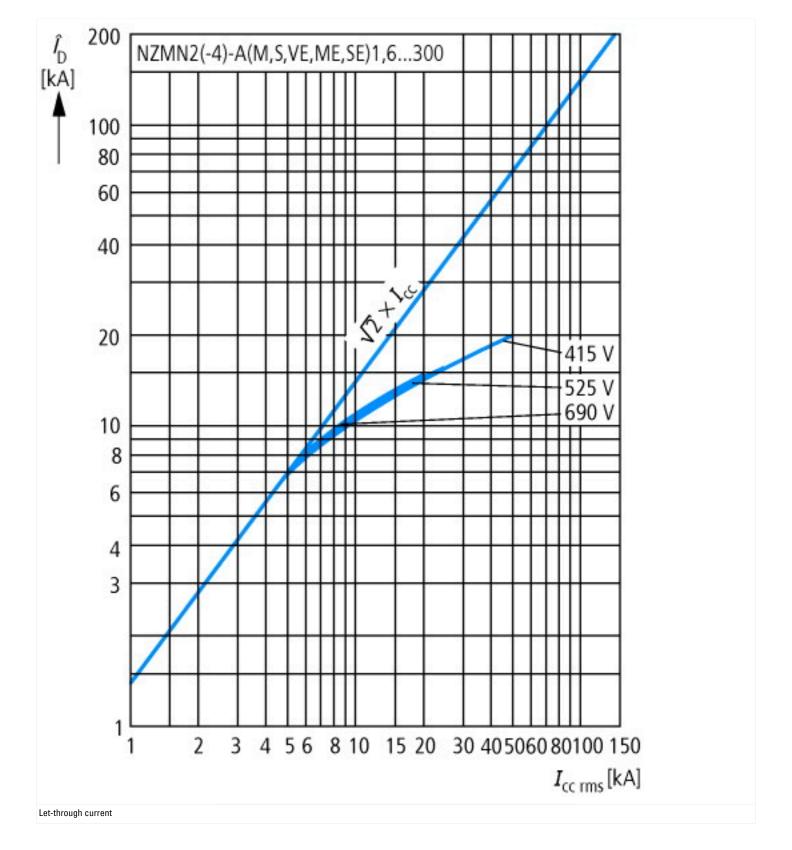


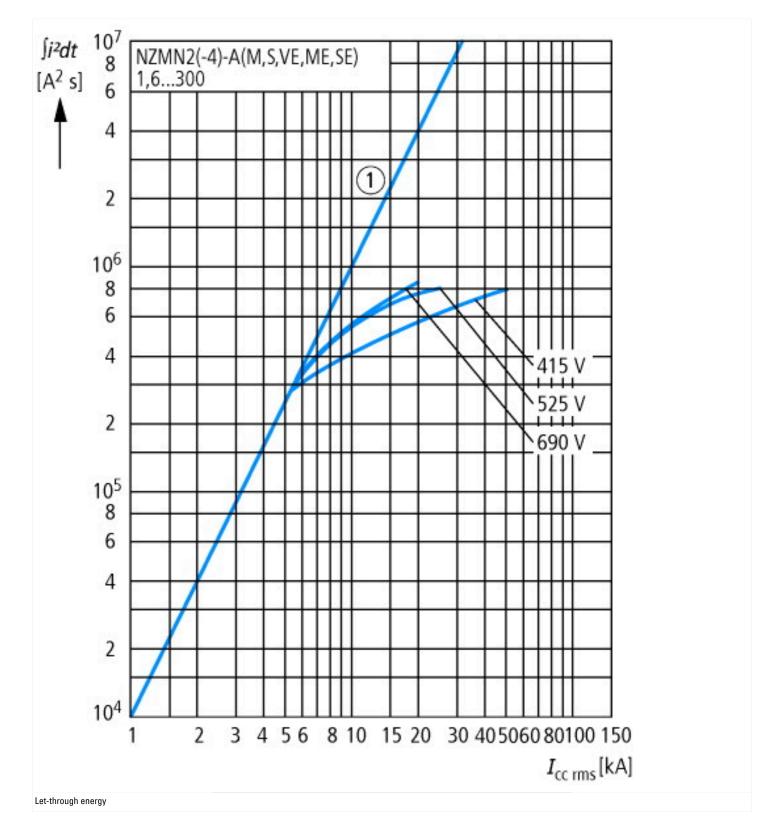

## **Dimensions**

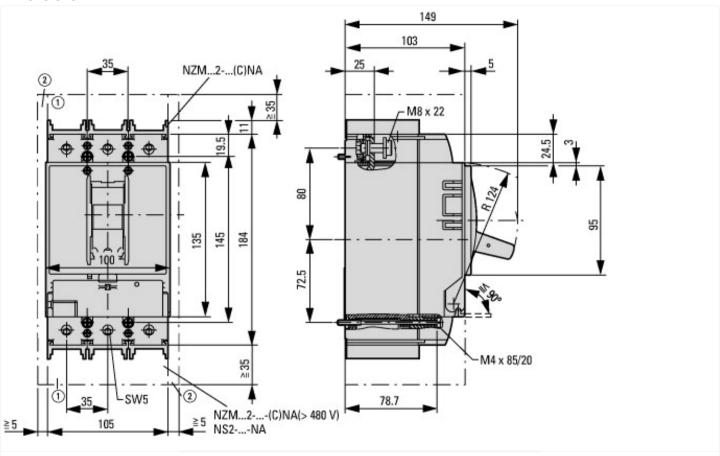

Blow out area, minimum clearance to adjacent parts
 Minimum clearance to adjacent parts

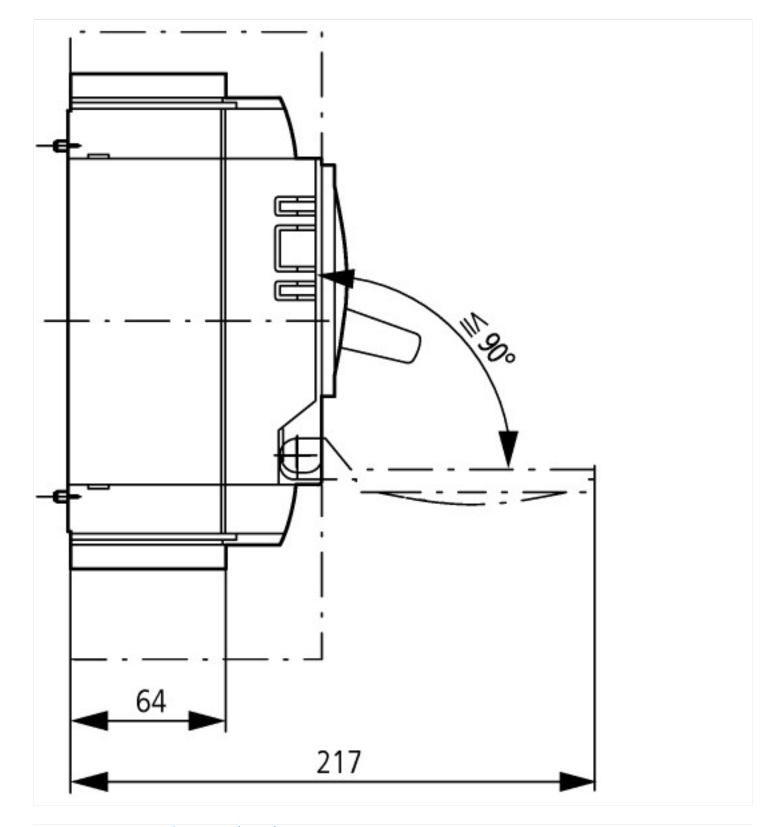

# Additional product information (links)

| Temperature dependency, Derating                      | http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172   |
|---|--|
| CurveSelect characteristics program                   | http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm |
| additional technical information for NZM power switch | https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf  |