

# SF-CL1T264T

Related Information

- General terms and conditions..... F-7
- SF4B..... P.565~
- SF-C10 ..... P.703~
- General precautions ..... P.1501



[panasonic.net/id/pidsx/global](http://panasonic.net/id/pidsx/global)





## Combining light curtains and safety components into a single network with less wiring

### Network control is possible for light curtains and safety devices

Light curtains and safety devices can be controlled with a network by connecting them to the safety field network CC-Link Safety.

■ Can monitor safety circuits from general control

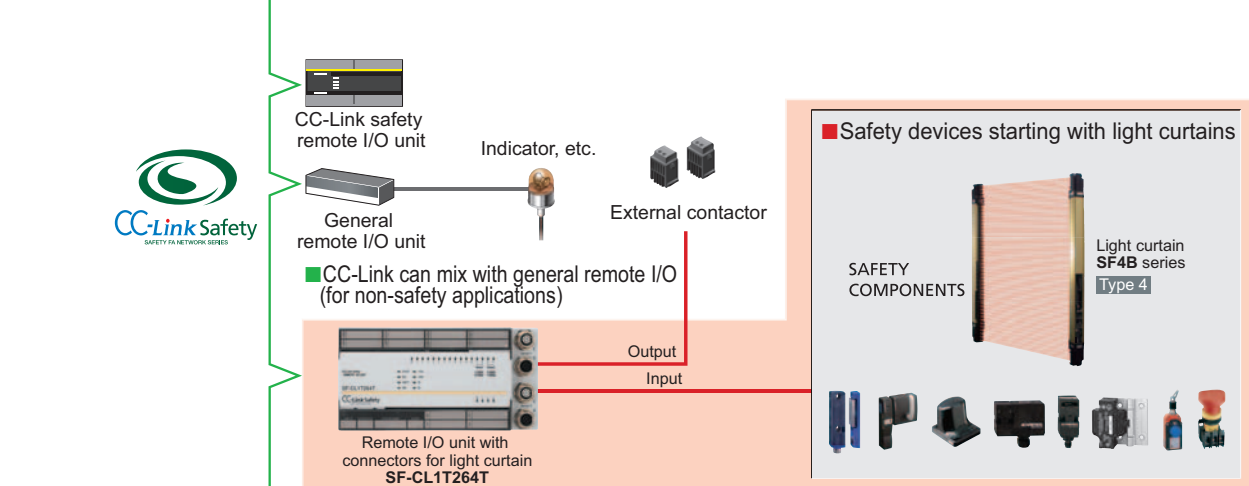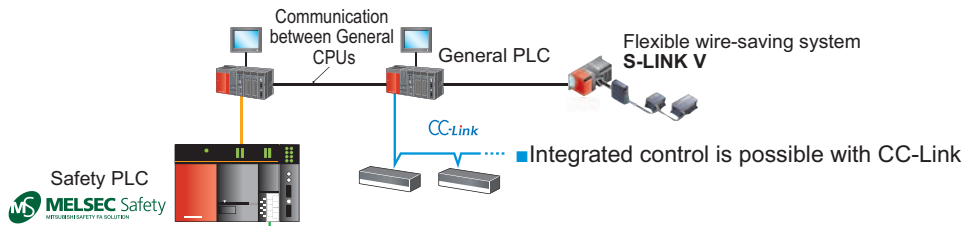

CC-Link Safety is an expanded safety field network which reinforces the communication error sensing function of CC-Link field network to provide greater equipment safety features. It complies with Category 4 control as specified in the ISO 13849-1 (JIS B 9705-1) international standard.

- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS / SAFETY COMPONENTS**
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC ELECTRICITY PREVENTION DEVICES
- LASER MARKERS
- PLC
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS


- Selection Guide
- Light Curtains
- Safety Components
- Optical Touch Switch
- Control Units
- Definition of Sensing Heights
- SF-C10
- SF-CL1T264T**
- SF-AC

## Wire-saving! Easy connection to the SF4B series of light curtains

Up to two sets of the **SF4B** series of light curtains can be easily connected using connectors. (If a terminal block is used, more than two sets can be connected.)

### Quick connection

Wiring for every two sets of light curtains can be easily connected with connectors.

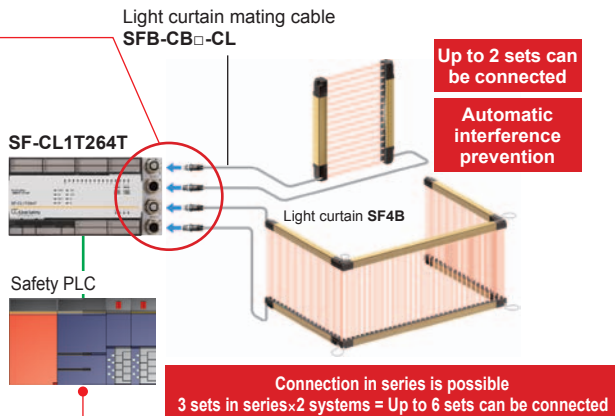

<Previous>  
Connected using  
approx. 20 lead wires



Eliminate wiring errors

### Safety PLC parameters have been set for light curtains

The parameters in the CSP file have already been default set to values such as "Do not carry out input dark test" to make operation of the light curtains easy

\* The CSP file can be downloaded from our website.  
In addition, refer to the instruction manual for details on parameter settings.

## Terminal block can be installed and removed

Because the terminal block can be installed and removed with the cables still attached, the man-hours required for maintenance is greatly reduced.



## Cost reduction

It contributes to the cost reduction due to shortening of the time for development, design change and maintenance, and saving wiring.

FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Light Curtains

Safety Components

Optical Touch Switch

Control Units

Definition of Sensing Heights


SF-C10

SF-CL1T264T

SF-AC


### Connect all your safety components to a single network

In addition to light curtains, peripheral I/O units such as safety components can also be connected so that safety circuit signals can all be transmitted to CC-Link Safety and be centrally controlled.

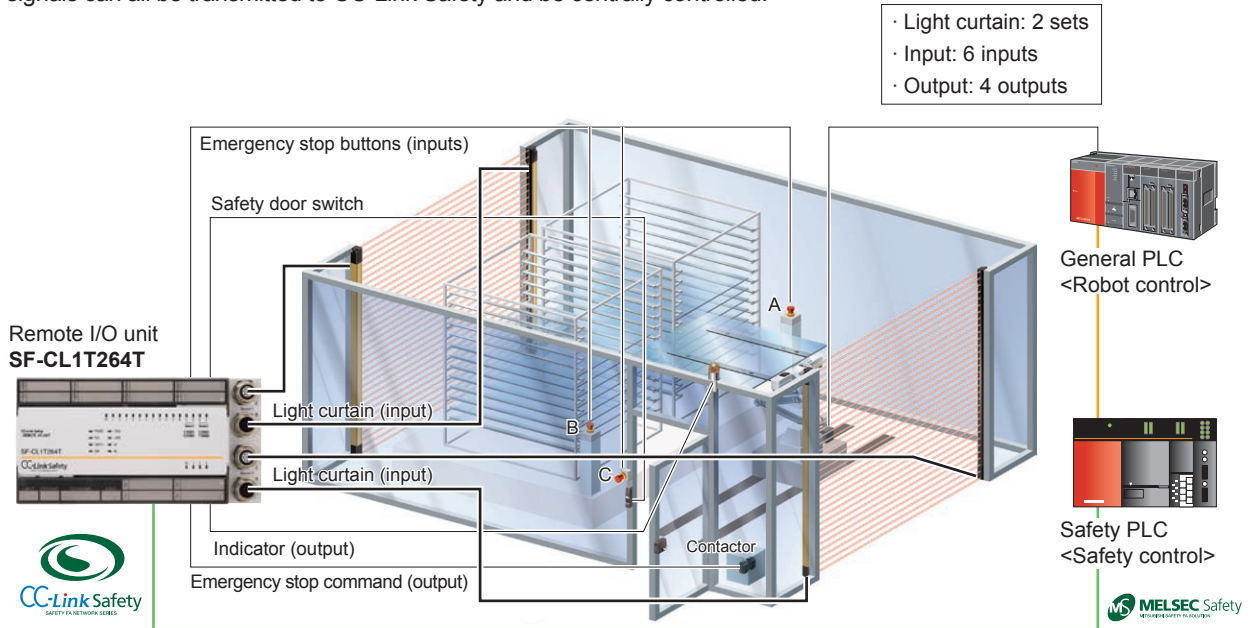

### Muting control can also be set using sequence program

Light curtain muting can also be controlled by means of a program, so that the line will only stop when a person passes through, and will not stop when a workpiece passes through.

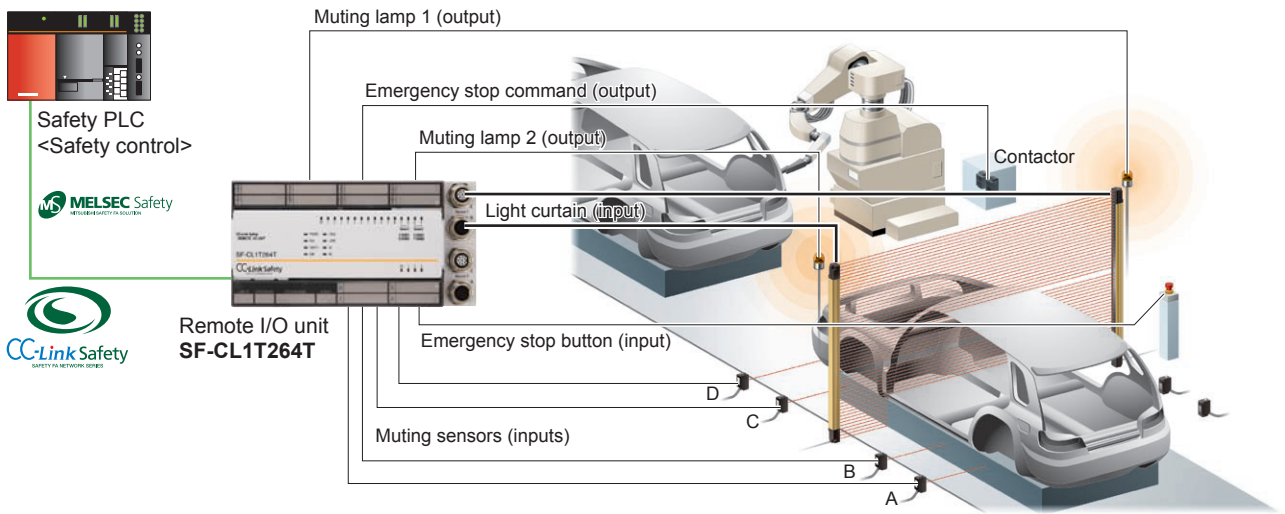


#### Muting control



This carries out control so that the line will not be stopped when a workpiece passes in between the emitter and receiver of the light curtain. The line will be stopped when a person passes between them. When two or more of the four muting sensors are interrupted simultaneously, the cause is judged to be a workpiece passing through. This prevents the line from stopping when a workpiece passes through the light curtain, thereby maintaining productivity. Refer to **SF4B** series pages for details.

FIBER SENSORS
LASER SENSORS
PHOTOELECTRIC SENSORS
MICRO PHOTOELECTRIC SENSORS
AREA SENSORS
LIGHT CURTAINS / SAFETY COMPONENTS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASUREMENT SENSORS
STATIC ELECTRICITY PREVENTION DEVICES
LASER MARKERS
PLC
HUMAN MACHINE INTERFACES
ENERGY CONSUMPTION VISUALIZATION COMPONENTS
FA COMPONENTS
MACHINE VISION SYSTEMS
UV CURING SYSTEMS
Selection Guide
Light Curtains
Safety Components
Optical Touch Switch
Control Units
Definition of Sensing Heights
SF-C10
SF-CL1T264T
SF-AC

**ORDER GUIDE****Remote I/O unit**

Designation	Appearance	Model No.	Connectable light curtains
CC-Link Safety system I/O unit with connectors for light curtain		<b>SF-CL1T264T</b>	<b>SF4B series</b>

**Light curtain mating cable**

Type	Appearance	Model No.	Description
Bottom cap cable		<b>SFB-CB05-CL</b>	Length: 0.5 m <b>1.640 ft</b> Net weight 110 g approx. (2 cables)
		<b>SFB-CB5-CL</b>	Length: 5 m <b>16.404 ft</b> Net weight 620 g approx. (2 cables)
		<b>SFB-CB10-CL</b>	Length: 10 m <b>32.808 ft</b> Net weight 1,200 g approx. (2 cables)
Extension cable		<b>SFB-CCJ10E-CL</b>	Length: 10 m <b>32.808 ft</b> Net weight 560 g approx. (1 cable)
		<b>SFB-CCJ10D-CL</b>	Length: 10 m <b>32.808 ft</b> Net weight 640 g approx. (1 cable)

FIBER  
SENSORSLASER  
SENSORSPHOTO-  
ELECTRIC  
SENSORSMICRO  
PHOTO-  
ELECTRIC  
SENSORSAREA  
SENSORSLIGHT  
CURTAINS/  
SAFETY  
COMPONENTSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE  
SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASURE-  
MENT  
SENSORSSTATIC  
ELECTRICITY  
PREVENTION  
DEVICESLASER  
MARKERS

PLC

HUMAN  
MACHINE  
INTERFACESENERGY  
CONSUMPTION  
VISUALIZATION  
COMPONENTSFA  
COMPONENTSMACHINE  
VISION  
SYSTEMSUV  
CURING  
SYSTEMSSelection  
GuideLight  
CurtainsSafety  
ComponentsOptical Touch  
SwitchControl  
UnitsDefinition of  
Sensing  
Heights**SF-C10****SF-CL1T264T****SF-AC**

## SPECIFICATIONS

Designation		CC-Link Safety system I/O unit with connectors for light curtain
Item	Model No.	<b>SF-CL1T264T</b>
Connectable light curtain		<b>SF4B series</b>
Applicable standard		IEC / EN 61508 (SIL 3), EN ISO 13849-1 (JIS B 9705-1) (Category 4, PLLe), UL 508
Unit power (Note 2)	Supply voltage	24 V DC $\pm 10\%$ Ripple P-P 10 % or less
	Current consumption	140 mA or less (24 V DC, with all points ON)
	Protective function	Unit power overvoltage / overcurrent protection function
	Fuse	0.8 A (Not replaceable)
	Momentary power failure period	10ms or less
Input specifications	No. of input points (Note 3)	Input of light curtain: 2 points (with interference prevention function), Input of terminal block: 6 points (input terminals: 12 points)
	Insulation method	Photocoupler
	Rated input voltage	24 V DC
	Rated input current	4.6 mA approx.
	Operating voltage range	24 V DC $\pm 10\%$ Ripple P-P 10 % or less
	Max. simultaneous input points	100 %
	ON voltage / ON current	15 V DC or more / 2 mA or more
	OFF voltage / OFF current	5 V DC or less / 0.5 mA or less
	Input resistance	5.6 k $\Omega$ approx.
	Input type	Negative common
	Response time	OFF $\rightarrow$ ON: 0.4 ms or less (at 24 V DC, excluding connecting device), ON $\rightarrow$ OFF: 0.4 ms or less (at 24 V DC, excluding connecting device)
	Safety remote station input response time	32 ms or less + filter-out time (1 ms, 5 ms, 10 ms, 20 ms, 50 ms)
	Output specifications	No. of output points
Insulation method		Photocoupler
Rated load voltage		24 V DC
Rated load voltage range		24 V DC $\pm 10\%$ Ripple P-P 10 % or less
Max. load current		0.5 A / point
Inrush current		1.0 A (10 ms or less)
Leakage current		0.5 mA or less
Residual voltage		1.0 V DC or less
Protective function		Output short-circuit protection function
Output type		Source + sink type, Source + source type
Response time		OFF $\rightarrow$ ON: 0.4 ms or less (at 24 V DC), ON $\rightarrow$ OFF: 0.4 ms or less (at 24 V DC)
Safety remote station input response time		32 ms or less
Surge protection		Incorporated (Zener diode)
External power supply (For external device) (Note 3)	Voltage	24 V DC $\pm 10\%$ Ripple P-P 10 % or less
	Current	60 mA (24 V DC, with all points ON, excluding external load current)
	Protective function	External power supply overvoltage / overcurrent protection function
	Fuse	8 A (Not replaceable)
Wiring method for common		16 input points / common, 4 output points / common (Terminal block 2-wire type)
Common current		Max. 4 A (Total of inputs and outputs)
No. of stations occupied		1 station
No. of access to nonvolatile memory		10 <sup>12</sup> times
Safety refresh response processing		38 ms
Excess voltage category		II
Pollution degree		2
Environmental resistance	Protection	IP20
	Ambient temperature	0 to +55 °C <b>+32 to +131 °F</b> (No dew condensation), Storage: -40 to +75 °C <b>-40 to +167 °F</b>
	Ambient humidity	5 to 95 % RH, Storage: 5 to 95 % RH
	Dielectric withstand voltage	500V AC between all external DC terminals and ground, for 1 minute
	Insulation resistance	10 M $\Omega$ or more between all external DC terminals and ground, by a 500 V DC insulation resistance tester
	Vibration resistance / Shock resistance	Conforming to JIS B 3502, IEC 61131-2
Material		Enclosure: ABS
External connection system		Terminal block, 2 crimp-style terminals or less
Cable		0.3 to 2.0 mm <sup>2</sup>
Applicable crimp-style terminal		RAV1.25-3 (Conforming to JIS B 2805) (Applicable wire size: 0.3 to 1.25 mm <sup>2</sup> )
Weight		Net weight: 0.7 kg approx.

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C **+68 °F**.

2) The power supply connected to this product must satisfy the following conditions:

- ① SELV (Safety Extra Low Voltage): Reinforced insulated from hazardous potential part (48 V or more)
- ② Compliance with the LVD (Low Voltage Directive)
- ③ Output voltage within 21.6 V to 26.4 V DC (Ripple P-P: 10 % or less.)

3) Total number of input points is 8 points, and use 2 points for control output (OSSD 1, 2) of 2 light curtains. Two inputs terminals are assigned for each input since dual wiring is supported.


**PRECAUTIONS FOR PROPER USE**

Refer to p.1501 for general precautions.

- When installing this product to a control panel, provide clearance of at least 60 mm **2.362 in** between the unit's top / bottom and any other structure or component to ensure proper airflow and to make unit replacement easy.

**DIMENSIONS (Unit: mm in)**

The CAD data in the dimensions can be downloaded from our website.

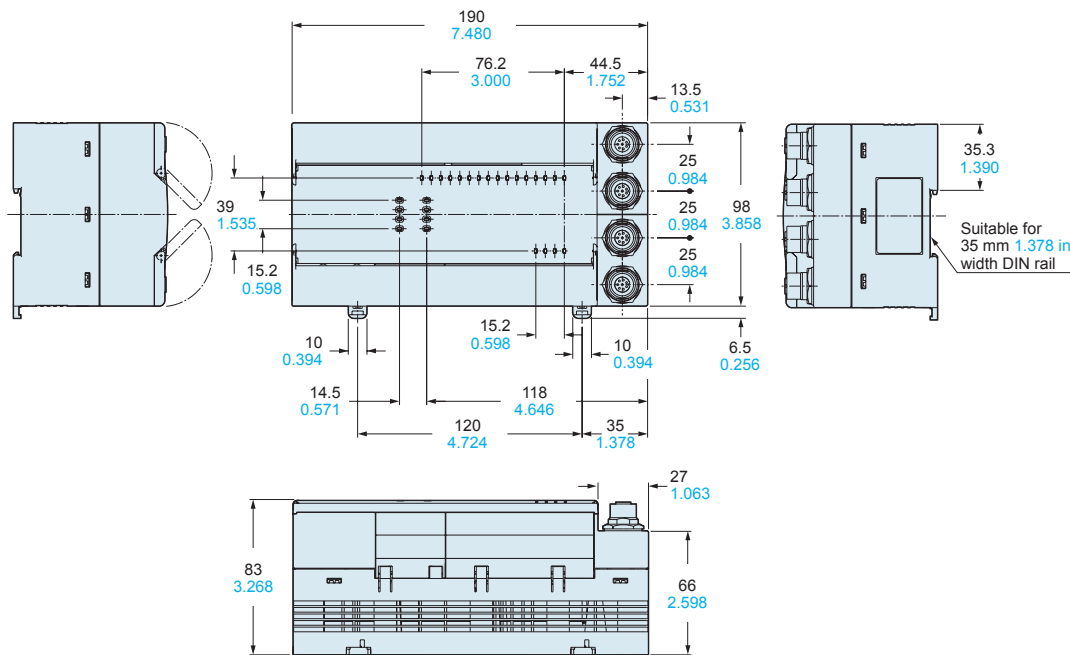

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Light Curtains

Safety Components

Optical Touch Switch

Control Units

Definition of Sensing Heights

SF-C10

SF-CL1T264T

SF-AC