### **DATASHEET - T3-2-15442/E**



Changeoverswitches, T3, 32 A, flush mounting, 2 contact unit(s), Contacts: 4, 90  $^{\circ}$ , maintained, Without 0 (Off) position, 1-2, design no. 15442



Part no. T3-2-15442/E Catalog No. 018116

Similar to illustration

Delivery program			
Product range			Control switches
Part group reference			T3
Basic function			Changeoverswitches
			with black thumb grip and front plate
Contacts			4
Degree of Protection			Front IP65
Design			flush mounting
Contact sequence			1 2 1 0 2 0 3 0 4 0 X 5 0 6 0 7 0 8 0 X
Switching angle		0	90
Switching performance			maintained Without 0 (Off) position
Design number			15442
Front plate no.			FS 196536
front plate			1-2
Motor rating AC-23A, 50 - 60 Hz			
400 V	Р	kW	15
Rated uninterrupted current	I <sub>u</sub>	Α	32
Note on rated uninterrupted current !u	_		Rated uninterrupted current $I_{\rm u}$ is specified for max. cross-section.
Number of contact units		contact unit(s)	

#### Technical data General

General			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3
Climatic proofing			Damp heat, constant, to IEC 60068-2-78
			Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +50
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree	.,	V/ A.C.	111/3
Rated impulse withstand voltage	U <sub>imp</sub>	V AC	6000
Mechanical shock resistance		g	15
Mounting position  Contacts			As required
Electrical characteristics			
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current	Iu	A	32
Note on rated uninterrupted current !u	u		Rated uninterrupted current $I_u$ is specified for max. cross-section.
Load rating with intermittent operation, class 12			Tatada alimitat aprodu aut antique appointed for malit a coope account
AB 25 % DF		x I <sub>e</sub>	2
AB 40 % DF		x l <sub>e</sub>	1.6
AB 60 % DF		x I <sub>e</sub>	1.3
Short-circuit rating		A = 0 / 1	OF.
Fuse  Petrol chart time withstead current (1 a current)		A gG/gL	
Rated short-time withstand current (1 s current)	I <sub>cw</sub>	A <sub>rms</sub>	650
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	Iq	kA	1
Switching capacity cos φ rated making capacity as per IEC 60947-3		Α	320
Rated breaking capacity cos φ to IEC 60947-3		A	
230 V		A	260
400/415 V		A	260
500 V		Α	240
690 V		Α	170
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at I <sub>e</sub>		W	1.1
Current heat loss per auxiliary circuit at I <sub>e</sub> (AC-15/230 V)		CO	1.1
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	> 0.5
Maximum operating frequency	Operations/h	X 10	1200
AC	Operations/ii		1200
AC-3			
Rating, motor load switch	Р	kW	
220 V 230 V	Р	kW	5.5
230 V Star-delta	Р	kW	7.5
400 V 415 V	P	kW	11
400 V Star-delta	P	kW	15
500 V	Р	kW	15
500 V Star-delta	Р	kW	18.5
690 V	Р	kW	11
690 V Star-delta	Р	kW	22
Rated operational current motor load switch			
230 V	I <sub>e</sub>	Α	23.7
230 V star-delta	l <sub>e</sub>	Α	32
400V 415 V	I <sub>e</sub>	A	23.7
4UUV 415 V	1 <sub>e</sub>	А	23.1

400 V star-delta	l <sub>e</sub>	Α	32
500 V	l <sub>e</sub>	Α	23.7
500 V star-delta	l <sub>e</sub>	Α	32
690 V	I <sub>e</sub>	Α	14.7
690 V star-delta	I <sub>e</sub>	Α	25.5
AC-23A	·e	,	
	D.	114/	
Motor rating AC-23A, 50 - 60 Hz	P	kW	
230 V	Р		7.5
400 V 415 V	Р	kW	15
500 V	Р	kW	15
690 V	Р	kW	15
Rated operational current motor load switch			
230 V	le	Α	32
400 V 415 V	l <sub>e</sub>	Α	32
500 V	I <sub>e</sub>	Α	26.4
690 V	I <sub>e</sub>	Α	17
DC	·		
DC-1, Load-break switches L/R = 1 ms			
		۸	75
Rated operational current	l <sub>e</sub>	A	25
Voltage per contact pair in series		V	60
DC-21A	l <sub>e</sub>	Α	
Rated operational current	l <sub>e</sub>	Α	1
Contacts		Quantity	1
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	I <sub>e</sub>	Α	25
Contacts		Quantity	1
48 V			
Rated operational current	l <sub>e</sub>	Α	25
Contacts		Quantity	2
60 V			
Rated operational current	I <sub>e</sub>	A	25
Contacts	C	Quantity	
120 V		Quantity	
Rated operational current	I <sub>e</sub>	Α	12
	'e		
Contacts		Quantity	3
240 V			_
Rated operational current	l <sub>e</sub>	A	5
Contacts		Quantity	5
DC-13, Control switches L/R = 50 ms			
Rated operational current	le	Α	20
Voltage per contact pair in series		V	24
Control circuit reliability at 24 V DC, 10 mA	Fault probability	H <sub>F</sub>	$< 10^{-5}, < 1$ failure in 100,000 switching operations
Terminal capacities	probability		
Solid or stranded		mm <sup>2</sup>	1 x (1 - 6)
			2 x (1 - 6)
Flexible with ferrules to DIN 46228		$\mathrm{mm}^2$	1 x (0.75 - 4) 2 x (0.75 - 4)
Terminal screw			M4
Tightening torque for terminal screw		Nm	
Technical safety parameters:		Nm	1.6
Notes			B10 <sub>d</sub> values as per EN ISO 13849-1, table C1
Rating data for approved types			
Contacts			
Rated operational voltage	U <sub>e</sub>	V AC	600
-			

Rated uninterrupted current max.			
Main conducting paths			
General use		Α	25
Auxiliary contacts			
General Use	I <sub>U</sub>	Α	10
Pilot Duty			A 600
Switching capacity			
Maximum motor rating			
Single-phase			
120 V AC		HP	1.5
200 V AC		HP	3
240 V AC		HP	3
Three-phase			
200 V AC		HP	3
240 V AC		HP	3
480 V AC		HP	7.5
600 V AC		HP	10
Short Circuit Current Rating		SCCR	
Basic Rating		kA	5
max. Fuse		Α	40
High fault rating		kA	10
max. Fuse		Α	40, Class J
Terminal capacity			
Solid or flexible conductor with ferrule		AWG	14 - 10
Terminal screw			M4
Tightening torque		lb-in	17.7

## **Design verification as per IEC/EN 61439**

Fechnical data for design verification			
Rated operational current for specified heat dissipation	In	Α	32
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	1.1
Equipment heat dissipation, current-dependent	$P_{vid}$	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
EC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects $$			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.

10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

### **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Control switch (EC002611)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Control switch (ecl@ss10.0.1-27-37-14-14 [ACN998011])

[AGN330011]/		
Type of switch		Reverser
Number of poles		2
Max. rated operation voltage Ue AC	V	690
Rated permanent current lu	Α	32
Number of switch positions		2
With 0 (off) position		No
With retraction in 0-position		No
Device construction		Built-in device
Width in number of modular spacings		0
Suitable for ground mounting		No
Suitable for front mounting 4-hole		Yes
Suitable for distribution board installation		No
Suitable for intermediate mounting		No
Complete device in housing		No
Type of control element		Toggle
Front shield size		48x48 mm
Degree of protection (IP), front side		IP65
Degree of protection (NEMA), front side		12

# Approvals

Product Standards	UL 60947-4-1;CSA - C22.2 No. 60947-4-1-14; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Specially designed for North America	Yes, with an alternative front plate and/or terminal markings to those of the IEC type in combination with "+NA" (105864)
Suitable for	Branch circuits, suitable as motor disconnect
Degree of Protection	IEC: IP65; UL/CSA Type 1, 12

### **Dimensions**

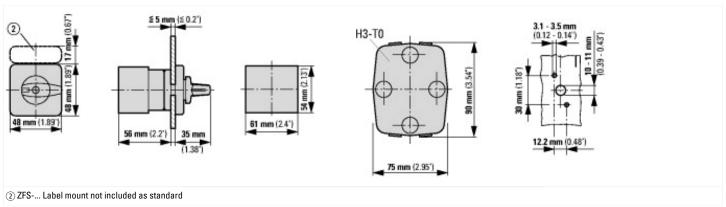

Additional product information (links)	
Display flip catalog page.	http://ecat.moeller.net/flip-cat/?edition=K115A&startpage=43
Technical overview cam switch, switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.2
System overview cam switch T	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.4
System overview switch-disconnector P	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.6
Key to part numbers Cam switch	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8
Key to part numbers Switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8
Switches for ATEX	http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html