DATASHEET - MSC-D-6,3-M7(24VDC)/BBA



DOL starter, 380 V 400 V 415 V: 2.2 kW, Ir= 4 - 6.3 A, 24 V DC, DC voltage

F-T•N Powering Business Worldwide"

Catalog No. No. **EL-Numme** (Norway)

Part no.

MSC-D-6,3-M7(24VDC)/BBA 102971 Alternate Catalog XTSC6P3B007BTDNL-A

er	4315432

Delivery program

Basic function			DOL starters (complete devices)
Basic device			MSC
			IE3 🗸
Notes			Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging.
Connection to SmartWire-DT			no
Motor ratings			
Motor rating			
AC-3			
380 V 400 V 415 V	Р	kW	2.2
Rated operational current			
AC-3			
380 V 400 V 415 V	l _e	А	5
Rated short-circuit current 380 - 415 V	Iq	kA	100
Setting range			
Setting range of overload releases	Ir	A	4 - 6.3
Coordination			Type of coordination "1" Type of coordination "2"
Contact sequence			
Actuating voltage			24 V DC
Material Annual DV2140.00			DC voltage
Motor-protective circuit-breakers PKZM0-6,3			
Contactor DILM7-10()			
DOL starter wiring set Mechanical connection element and electrical electric contact module PKZM0-XI	DM12		

03/15/2020

BK25/3-PKZ0-E extension terminal and if necessary B3.../...-PKZ0 three-phase commoning link can be added to motor-starter combinations to make Type F starters in accordance with UL508.

Notes

The DOL starters (complete units) consist of a PKZM0 motor protective circuit breaker and a DILM contactor. These combinations are mounted on the busbar adapters.

The connection of the main circuit between the motor protective circuit breaker and the contactor is established with an electrical contact module.

Cannot be combined with NHI-E-...-PKZ0-C standard auxiliary contact with spring-cage terminal.

Further information Technical data PKZM0 Accessories PKZ Technical data DILM Accessories DILM	Page → PKZM0 → 072896 → DILM → 281199	
---	---	--

Technical data

General			
Standards			UL 508 (on request) CSA C 22.2 No. 14 (on request)
Altitude		m	Max. 2000
Ambient temperature			-25 - +55
Main conducting paths			
Rated impulse withstand voltage	U _{imp}	V AC	6000
Overvoltage category/pollution degree			III/3
Rated operational voltage	U _e	V	230 - 415
Rated operational current			
Open, 3-pole: 50 – 60 Hz			
380 V 400 V	Ι _e	А	6.3
Additional technical data			
Motor protective circuit breaker PKZM0, PKE			PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/ PKZM0 product group DILM contactors, see contactor product group DILET timing relay, ETR, see contactors, electronic timing relays product group
Power consumption			
DC operated	Sealing	W	3
Rating data for approved types			
Auxiliary contacts			
Pilot Duty			
AC operated			A600
DC operated			P300
General Use			
AC		V	600
AC		А	15
DC		V	250
DC		А	1
Short Circuit Current Rating		SCCR	
600 V High Fault			
SCCR (fuse)		kA	100
max. Fuse		А	1 Class J/CC

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	А	6.3
Heat dissipation per pole, current-dependent	P _{vid}	W	2.3
Equipment heat dissipation, current-dependent	P _{vid}	W	6.9
Static heat dissipation, non-current-dependent	P _{vs}	W	2.6
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.

102.3.2 Verification of resistance of insulating materials to normal head and fire due to internal electric effectsMets the product standard's requirements.102.3.3 Verification of resistance of insulating materials to abnormal head and fire due to internal electric effectsMets the product standard's requirements.102.4 Resistance to ultra-violet (UV) radiationMets the product standard's requirements.102.5 LiftingDes not apply, since the entire switchgear needs to be evaluated.102.6 Mechanical inpactDes not apply, since the entire switchgear needs to be evaluated.103.0 Egree of protection of ASSEMBLIESDes not apply, since the entire switchgear needs to be evaluated.104.0 Elearances and creepage distancesMets the product standard's requirements.105.0 Encorporation of switching devices and componentsMets the product standard's requirements.105.0 Encorections for external conductorsIs the panel builder's responsibility.103.0 Supplex either standard by electric strengthIs the panel builder's responsibility.103.0 Supplex either strengthIs the panel builder's responsibility.103.1 Supplex either strengthIs the panel builder's responsibility. </th <th></th> <th></th>		
and fire due to internal electric effectsA fire due to internal electric effects10.2.4 Resistance to ultra-violet (UV) radiationMeets the product standard's requirements.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.2.7 InscriptionsMeets the product standard's requirements.10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.2.7 InscriptionsMeets the product standard's requirements.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.1 Supply switchstand voltageIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Inpulse withstand voltageThe panel builder's responsibility.10.10 Temperature riseThe panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be shorted.10.12 Electromagnetic compatibility.Ste panel builder's responsibility. The specifications for the switchgear must be shorted.10.12 Electromagnetic compat	10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.25 LiftingDees not apply, since the entire switchgear needs to be evaluated.10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.2.1 InscriptionsMeets the product standard's requirements.10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsDoes not apply, since the entire switchgear needs to be evaluated.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Inpulse withstand voltageIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionIs	8	Meets the product standard's requirements.
102.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.102.7 InscriptionsDoes not apply, since the entire switchgear needs to be evaluated.10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesDoes not apply, since the entire switchgear needs to be evaluated.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 Sulation propertiesIs the panel builder's responsibility.10.3.1 mpulse withstand voltageIs the panel builder's responsibility.10.3.1 stret riseIs the panel builder's responsibility.10.13 hort-circuit ratingIs the panel builder's responsibility.10.15 Nort-circuit ratingIs the panel builder's responsibility.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionIs the panel builder's responsibility. The specifications for the switchgear must be observed.	10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9.1 nsulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.1 Temperature rise The panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provide th	10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder is responsibility. 10.10 Temperature rise Is the panel builder is responsibility. 10.10 Temperature rise Is the panel builder is responsibility. 10.11 Short-circuit rating Is the panel builder is responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provide the information in the instruction <td>10.2.6 Mechanical impact</td> <td>Does not apply, since the entire switchgear needs to be evaluated.</td>	10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.1 Power-frequency electric strength Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.1 Temperature rise Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provide the information in the instruction	10.2.7 Inscriptions	Meets the product standard's requirements.
10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseThe panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction	10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.1 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionIt the panel builder's responsibility. The specifications for the switchgear must be observed.	10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise The panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.9 Insulation propertiesImage: Properties of the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction	10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise The panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provide the information in the instruction	10.9 Insulation properties	
10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise The panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.10 Temperature rise The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provide the information in the instruction	10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function Image: Compatibility of the switchgear must be observed.	10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.10 Temperature rise	
10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.11 Short-circuit rating	
	10.12 Electromagnetic compatibility	
	10.13 Mechanical function	

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])

[AJZ/10015])		
Kind of motor starter		Direct starter
With short-circuit release		Yes
Rated control supply voltage Us at AC 50HZ	V	0 - 0
Rated control supply voltage Us at AC 60HZ	V	0 - 0
Rated control supply voltage Us at DC	V	24 - 24
Voltage type for actuating		DC
Rated operation power at AC-3, 230 V, 3-phase	kW	1.5
Rated operation power at AC-3, 400 V	kW	2.2
Rated power, 460 V, 60 Hz, 3-phase	kW	0
Rated power, 575 V, 60 Hz, 3-phase	kW	0
Rated operation current le	А	5
Rated operation current at AC-3, 400 V	А	6.3
Overload release current setting	А	4 - 6.3
Rated conditional short-circuit current, type 1, 480 Y/277 V	А	0
Rated conditional short-circuit current, type 1, 600 Y/347 V	А	0
Rated conditional short-circuit current, type 2, 230 V	А	50000
Rated conditional short-circuit current, type 2, 400 V	А	50000
Number of auxiliary contacts as normally open contact		1
Number of auxiliary contacts as normally closed contact		0
Ambient temperature, upper operating limit	°C	60
Temperature compensated overload protection		Yes
Release class		CLASS 10
Type of electrical connection of main circuit		Screw connection
Type of electrical connection for auxiliary- and control current circuit		Screw connection
Rail mounting possible		Yes
With transformer		No
Number of command positions		0
Suitable for emergency stop		No

Coordination class according to IEC 60947-4-3		Class 2
Number of indicator lights		0
External reset possible		No
With fuse		No
Degree of protection (IP)		IP20
Degree of protection (NEMA)		Other
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		No
Width	mm	45
Height	mm	200
Depth	mm	154

Approvals

Product Standards	UL60947-4-1A; CSA-C22.2 No. 14-10; IEC60947-4-1; CE marking
UL File No.	E123500
UL Category Control No.	NKJH
CSA File No.	12528
CSA Class No.	3211-04
North America Certification	UL listed, CSA certified
Specially designed for North America	No

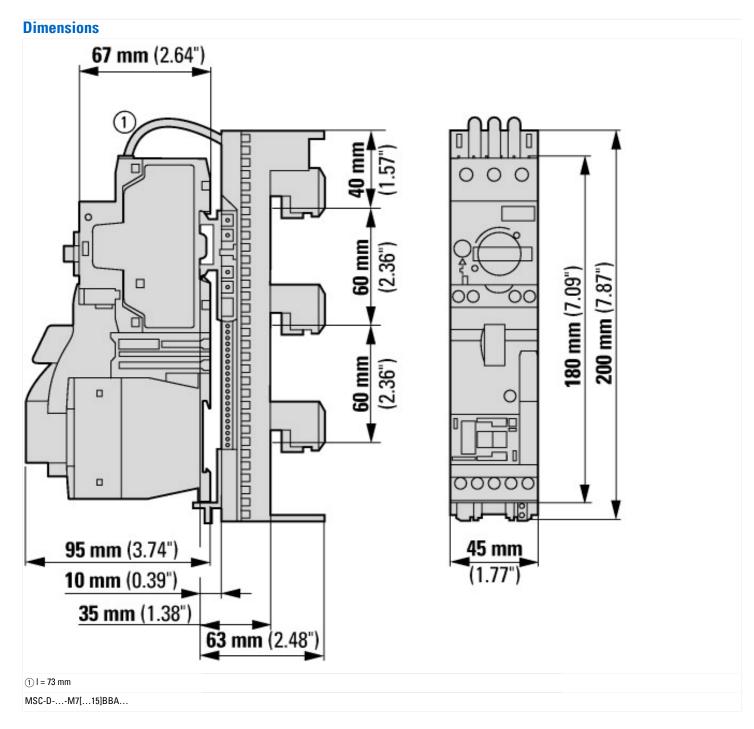

Assets (links)

Declaration of CE Conformity 00002885 **Instruction Leaflets** IL034038ZU2018_06

Additional product information (links)

IL034038ZU (AWA1210-2246) Direct-on-line starter up to 15 A		
IL034038ZU (AWA1210-2246) Direct-on-line ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL034038ZU2018_06.pdf starter up to 15 A		
IL03402015Z (AWA1210-2324) Busbar adapter		
IL03402015Z (AWA1210-2324) Busbar adapter	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402015Z2018_05.pdf	
Motor starters and "Special Purpose Ratings" for the North American market	http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf	
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf	