DATASHEET - STN4,0(*/*)



Control transformer, 4 kVA, Rated input voltage 100 – 690 \pm 5 % V, Rated output voltage 12 – 250 V



Part no.STN4,0(*/*)Catalog No.204998Alternate Catalog-No.-

Delivery program

| Product range | | Single-phase control transformers ST |
|----------------------|-----|---------------------------------------|
| Basic function | | Single-phase STN control transformers |
| Rated input voltage | V | 100 - 690 ± 5 % |
| Rated output voltage | V | 12 – 250 |
| Rated power | kVA | 4 |
| Short-time rating | kVA | 12.2 |
| Cu factor 8,00 | | |

Notes

• The STN transformers are suitable for use in control circuits to VDE 0113 or IEC/EN 60204.

- UL/CSA only up to primary and secondary 600 V (incl. tappings).
- When ordering, the type reference must include the following details:

STN0,1(*/*)

1st wildcard \triangleq Nominal input voltage

2nd wildcard \triangleq Rated output voltage

Ordering example

- Desired part no.: STN0,1
- Desired rated input voltage 200 V
- Desired rated output voltage 18.5 V

The correct type reference is

STN0,1(200/18,5)

Transformer-protective circuit-breaker →#088907

Technical data

| General | | | |
|----------------------------|---|------|---|
| Standards | | | |
| Built and tested to | | | IEC/EN 61558-2-2 VDE 0570 Part 2-2 |
| Suitable for use to | | | IEC/EN 60204-1, ÖVE-EN 13 VDE 0113, VDE 0100 Part 410 |
| Ambient temperature | | | -25 - 40 |
| Characteristics | | | |
| Terminations | | | ● (< 115 A) |
| Connection lugs | | | ● (> 115 A) |
| Insulation class | | | В |
| Rated frequency | I | Hz | 50 - 60 |
| Primary tapping | | | ± 5 % |
| Degree of Protection | | | IP00 |
| Separate windings | | | • |
| Fully vacuum-impregnated | | | • |
| Rated duty factor | | % DF | 100 |
| Electrical characteristics | | | |
| Note | | | The following applies for the no-load loss, short-circuit loss (copper losses), short-circuit voltage and efficiency values: all details relate to a temperature of 20 $^\circ C$ |
| Total weight | I | kg | 27 |
| | | | |

No-load losses

Short-circuit losses

W

W

28

143

| Shortcircuit voltage | % | 2.4 |
|----------------------|---|------|
| Efficiency | | 0.96 |

Design verification as per IEC/EN 61439

| Technical data for design verification | | | |
|---|-------------------|----|--|
| Rated operational current for specified heat dissipation | l _n | Α | 0 |
| Heat dissipation per pole, current-dependent | P _{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P _{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P _{vs} | W | 171 |
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 40 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |
| | | | |

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / One-phase control transformer (EC002486)


| Electric engineering, automation, process control engineering / Transformer, converter, coil / Control transformer / One-phase control transformer (ecl@ss10.0.1-27-03-13-02 [AAB620015]) | | |
|---|---|-----------|
| | | No |
| | | No |
| | | No |
| | V | 100 - 690 |
| | V | 0 - 0 |
| | V | 0 - 0 |
| | V | 0 - 0 |
| | V | 0 - 0 |
| | V | 0 - 0 |
| | V | 0 - 0 |
| | V | 0 - 0 |
| | V | 0 - 0 |
| | | |

| Primary voltage 10V0 - 0Secondary voltage 1V12 - 250Secondary voltage 2V0 - 0Secondary voltage 3V0 - 0Secondary voltage 4V0 - 0Secondary voltage 5V0 - 0Secondary voltage 6V0 - 0Secondary voltage 7V0 - 0Secondary voltage 8V0 - 0Secondary voltage 9V0 - 0Secondary voltage 9V0 - 0Secondary voltage 10V0 - 0Secondary voltage 10V0 - 0 |
|---|
| Secondary voltage 2 V 0 - 0 Secondary voltage 3 V 0 - 0 Secondary voltage 4 V 0 - 0 Secondary voltage 5 V 0 - 0 Secondary voltage 6 V 0 - 0 Secondary voltage 7 V 0 - 0 Secondary voltage 8 V 0 - 0 Secondary voltage 9 V 0 - 0 |
| Secondary voltage 3V0 - 0Secondary voltage 4V0 - 0Secondary voltage 5V0 - 0Secondary voltage 6V0 - 0Secondary voltage 7V0 - 0Secondary voltage 8V0 - 0Secondary voltage 9V0 - 0Secondary voltage 9V0 - 0Secondary voltage 9V0 - 0 |
| Secondary voltage 4V0 - 0Secondary voltage 5V0 - 0Secondary voltage 6V0 - 0Secondary voltage 7V0 - 0Secondary voltage 8V0 - 0Secondary voltage 9V0 - 0 |
| Secondary voltage 5V0 - 0Secondary voltage 6V0 - 0Secondary voltage 7V0 - 0Secondary voltage 8V0 - 0Secondary voltage 9V0 - 0 |
| Secondary voltage 6V0 - 0Secondary voltage 7V0 - 0Secondary voltage 8V0 - 0Secondary voltage 9V0 - 0 |
| Secondary voltage 7 V 0 - 0 Secondary voltage 8 V 0 - 0 Secondary voltage 9 V 0 - 0 |
| Secondary voltage 8 V 0 - 0 Secondary voltage 9 V 0 - 0 |
| Secondary voltage 9 V 0 - 0 |
| |
| Secondary voltage 10 V 0 - 0 |
| |
| Rated apparent power VA 4000 |
| Type of insulation material acc. IEC 85 B |
| Short-circuit-proof No |
| Relative short circuit voltage % 2.4 |
| Width mm 230 |
| Height mm 290 |
| Depth mm 185 |
| Degree of protection (IP) |
| Ring core No |
| Suitable for mounting on PCB No |
| Modular version No |
| Conductor material Copper |

Approvals

| Product Standards | UL 506; UL5085-1; UL 5085-2; CSA-C22.2 No. 66; CSA-C22.2 No. 66.1-06; CSA-C22.2 No. 66.2-06; IEC/EN 61558-2-2; CE marking |
|--------------------------------------|--|
| UL File No. | E167225 |
| UL Category Control No. | ΧΡΤΩ2, ΧΡΤΩ8 |
| CSA File No. | UL report applies to both US and Canada |
| CSA Class No. | - |
| North America Certification | UL recognized, certified by UL for use in Canada |
| Specially designed for North America | No |
| Suitable for | Branch circuits |
| Max. Voltage Rating | 600 V AC |
| Degree of Protection | IEC: IP00, UL/CSA Type: - |

Dimensions

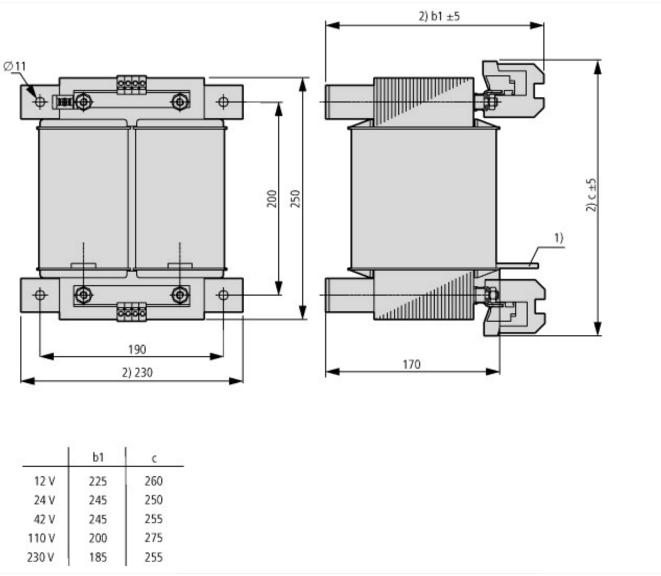

Connection lugs
Maximum space requirement