DATASHEET - NZMB1-A32



Circuit-breaker, 3p, 32A

Part no. NZMB1-A32 Catalog No. 280989

EL-Nummer (Norway) 4358977






Delivery program			
Product range			Circuit-breaker
Protective function			System and cable protection
Standard/Approval			IEC
Installation type			Fixed
Release system			Thermomagnetic release
Construction size			NZM1
Number of poles			3 pole
Standard equipment			Box terminal
Switching capacity			
400/415 V 50 Hz	I _{cu}	kA	25
Rated current = rated uninterrupted current			
Rated current = rated uninterrupted current	$I_n = I_u$	Α	32
Setting range			
Overload trip			
中	I _r	Α	25 - 32
Short-circuit releases			
Non-delayed	$I_i = I_n \times \dots$		350 A fixed
Short-circuit releases			
min.		Α	350

Technical data

General		
Standards		IEC/EN 60947
Protection against direct contact		Finger and back of hand proof to VDE 0106 Part 100
Climatic proofing		Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature		
Ambient temperature, storage	°C	- 40 - + 70
Operation	°C	-25 - +70
Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27	g	20 (half-sinusoidal shock 20 ms)
Safe isolation to EN 61140		
Between auxiliary contacts and main contacts	V AC	500
between the auxiliary contacts	V AC	300
Mounting position		Vertical and 90° in all directions



With XFI earth-fault release: - NZM1, N1, NZM2, N2: vertical and 90° in all directions 90° in all directions
with plug-in unit
- NZM1, N1, NZM2, N2: vertical, 90°
right/left
with withdrawable unit:
- NZM3, N3: vertical, 90° right/left
- NZM4, N4: vertical

with remote operator:
- NZM2, N(S)2, NZM3, N(S)3,
NZM4, N(S)4: vertical and 90° in all directions

Direction of incoming supply	as required
Degree of protection	
Device	In the operating controls area: IP20 (basic degree of protection)
Enclosures	With insulating surround: IP40 With door coupling rotary handle: IP66
Terminations	Tunnel terminal: IP10 Phase isolator and strip terminal: IP00
Other technical data (sheet catalogue)	Temperature dependency, Derating
Circuit-breakers	

Rated current = rated uninterrupted current	$I_n = I_u$	Α	32
Rated surge voltage invariability	U_{imp}		
Main contacts		V	6000
Auxiliary contacts		V	6000
Rated operational voltage	U _e	V AC	440
Overvoltage category/pollution degree			111/3
Rated insulation voltage	Ui	V	690
Use in unearthed supply systems		V	≦ 440

Switching capacity

Rated short-circuit making capacity	I _{cm}		
240 V	I _{cm}	kA	63
400/415 V	I _{cm}	kA	53
440 V 50/60 Hz	I _{cm}	kA	53
Rated short-circuit breaking capacity $I_{\rm cn}$	I _{cn}		
Icu to IEC/EN 60947 test cycle 0-t-C0	Icu	kA	
240 V 50/60 Hz	I _{cu}	kA	30
400/415 V 50/60 Hz	I _{cu}	kA	25
440 V 50/60 Hz	I _{cu}	kA	25
Ics to IEC/EN 60947 test cycle 0-t-C0-t-C0	lcs	kA	
240 V 50/60 Hz	I _{cs}	kA	30
400/415 V 50/60 Hz	I _{cs}	kA	25
440 V 50/60 Hz	I _{cs}	kA	18.5
			Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker.
Utilization category to IEC/EN 60947-2			A
Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release)	Operations		20000
Lifespan, electrical			
AC-1			
400 V 50/60 Hz	Operations		7500
415 V 50/60 Hz	Operations		7500
Max. operating frequency		0ps/h	120
Total break time at short-circuit		ms	< 10

Terminal capacity

Terminar capacity		
Standard equipment		Box terminal
Optional accessories		Screw connection Tunnel terminal connection on rear
Round copper conductor		
Box terminal		
Solid	mm ²	1 x (10 - 16)

			2 x (6 - 16)
Stranded		mm ²	1 x (10 - 70) ³⁾ 2 x (6-25)
			³⁾ Up to 95 mm² can be connected depending on the cable manufacturer.
Tunnel terminal			
Solid		mm ²	1 x 16
Stranded			
1-hole		mm ²	1 x (25 - 95)
Bolt terminal and rear-side connection			
Direct on the switch			
Solid		mm ²	1 x (10 - 16) 2 x (6 - 16)
Stranded		mm ²	1 x (10 - 70) ³⁾ 2 x 25
			³⁾ Up to 95 mm ² can be connected depending on the cable manufacturer.
Al circular conductor			
Tunnel terminal			
Solid		mm^2	1 x 16
Stranded			
Stranded		mm ²	1 x (25 - 95)
Bolt terminal and rear-side connection			
Direct on the switch			
Solid		mm ²	1 x (10 - 16) 2 x (10 - 16)
Stranded		mm ²	1 x (25 - 35) 2 x (25 - 35)
Cu strip (number of segments x width x segment thickness)			
Box terminal			
	min.	mm	2 x 9 x 0.8
	max.	mm	9 x 9 x 0.8
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M6
Direct on the switch			
	min.	mm	12 x 5
	max.	mm	16 x 5
Control cables			
		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)

Design verification as per IEC/EN 61439

Design vernication as per illo/liv 01433			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	32
Equipment heat dissipation, current-dependent	P_{vid}	W	9.31
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
EC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.

10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013])

Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional No DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact No With under voltage release No No No No No No No No No N	protection (eci@ss10.0.1-2/-3/-04-09 [AJZ/16013])		
Rated short-circuit breaking capacity lou at 400 V, 50 Hz KA 25 Overload release current setting A 25 - 32 Adjustment range short-term delayed short-circuit release A 0 - 0 Adjustment range undelayed short-circuit release A 350 - 350 Integrated earth fault protection Frame clamp No Type of electrical connection of main circuit Built-in device fixed built-in technique Device construction Built-in device fixed built-in technique Suitable for DIN rail (top hat rail) mounting No Number of auxiliary contacts as normally closed contact Yes Number of auxiliary contacts as normally open contact 0 With switched-off indicator Yes With switched-off indicator No With under voltage release No Number of poles 3 Position of connection for main current circuit Front side Type of control element Front side Complete device with protection unit Yes Motor drive integrated No Motor drive integrated No	Rated permanent current lu	Α	32
Overload release current setting A 25-32 Adjustment range short-term delayed short-circuit release A 0 - 0 Adjustment range undelayed short-circuit release A 350-350 Integrated earth fault protection M Frame clamp Type of electrical connection of main circuit M Built-in device fixed built-in technique Suitable for DIN rail (top hat rail) mounting M Yes Number of auxiliary contacts as normally closed contact M 0 Number of auxiliary contacts as change-over contact M 0 With switched-off indicator M No With under voltage release No No Number of poles 3 3 Position of connection for main current circuit M No Type of control element M No Complete device with protection unit M Font side Motor drive integrated No No Motor drive optional No No	Rated voltage	V	440 - 440
Adjustment range short-term delayed short-circuit release A 0 - 0 Adjustment range undelayed short-circuit release A 350 - 350 Integrated earth fault protection No No Type of electrical connection of main circuit Frame clamp Built-in device fixed built-in technique Suitable for DIN rail (top hat rail) mounting Built-in device fixed built-in technique Wester show the province fixed built-in technique Number of auxiliary contacts as normally closed contact Yes Ves Number of auxiliary contacts as normally open contact O O Number of auxiliary contacts as change-over contact Yes No With switched-off indicator No No With switched-off indicator No No With under voltage release No No Number of poles 3 Front side Postion of connection for main current circuit Front side Rocker lever Complete device with protection unit Yes No Motor drive integrated Yes No Motor drive integrated No No	Rated short-circuit breaking capacity Icu at 400 V, 50 Hz	kA	25
Adjustment range undelayed short-circuit release Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact With switched-off indicator With switched-off indicator With switched-off indicator Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive	Overload release current setting	Α	25 - 32
Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Number of poles Number of poles Number of poles Number of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive integrated Motor drive optional	Adjustment range short-term delayed short-circuit release	А	0 - 0
Type of electrical connection of main circuit Device construction Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional No DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact With switched-off indicator With under voltage release No No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional	Adjustment range undelayed short-circuit release	А	350 - 350
Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Number of indicator Number of poles Number of poles Number of poles Number of poles No No Number of poles No No No No Number of poles No No No Number of connection for main current circuit No	Integrated earth fault protection		No
Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Number of puxiliary contacts as change-over contact Nith switched-off indicator No	Type of electrical connection of main circuit		Frame clamp
DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact With switched-off indicator With under voltage release No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional	Device construction		Built-in device fixed built-in technique
Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact With switched-off indicator With switched-off indicator With under voltage release No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional	Suitable for DIN rail (top hat rail) mounting		No
Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact With switched-off indicator With under voltage release No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional O O O O O O O O O O O O O	DIN rail (top hat rail) mounting optional		Yes
Number of auxiliary contacts as change-over contact With switched-off indicator With under voltage release No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional O O O O O O O O O O O O O	Number of auxiliary contacts as normally closed contact		0
With switched-off indicator With under voltage release No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional	Number of auxiliary contacts as normally open contact		0
With under voltage release No Number of poles Societion of connection for main current circuit Type of control element Complete device with protection unit Motor drive optional No	Number of auxiliary contacts as change-over contact		0
Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive optional 3 Front side Rocker lever Rocker lever Yes No No No No No No No No No N	With switched-off indicator		No
Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive optional Front side Rocker lever Yes No No No	With under voltage release		No
Type of control element Complete device with protection unit Motor drive optional Rocker lever Yes No No No	Number of poles		3
Complete device with protection unit Yes Motor drive integrated No Motor drive optional No	Position of connection for main current circuit		Front side
Motor drive integrated No	Type of control element		Rocker lever
Motor drive optional No	Complete device with protection unit		Yes
·	Motor drive integrated		No
Degree of protection (IP) IP20	Motor drive optional		No
	Degree of protection (IP)		IP20


Characteristics

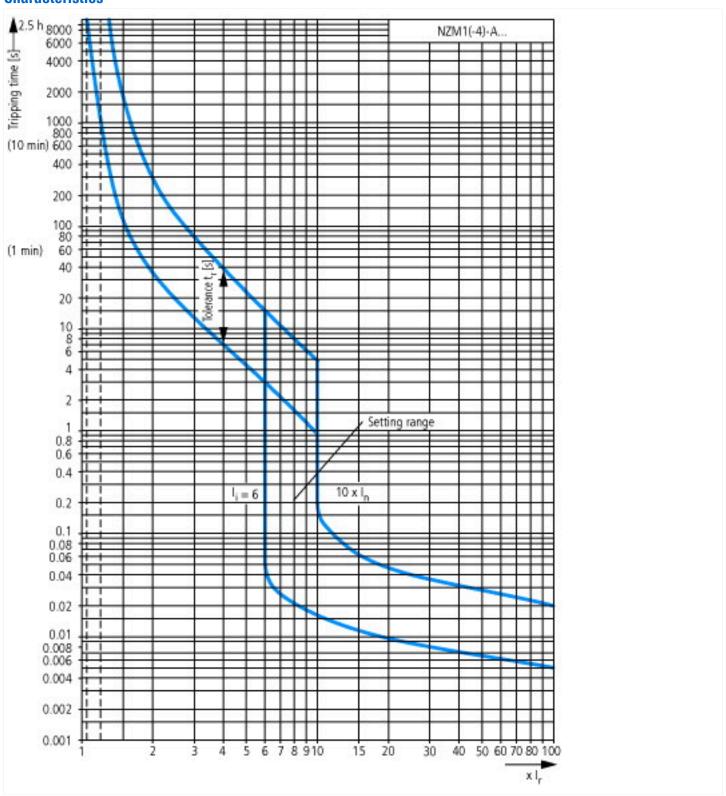


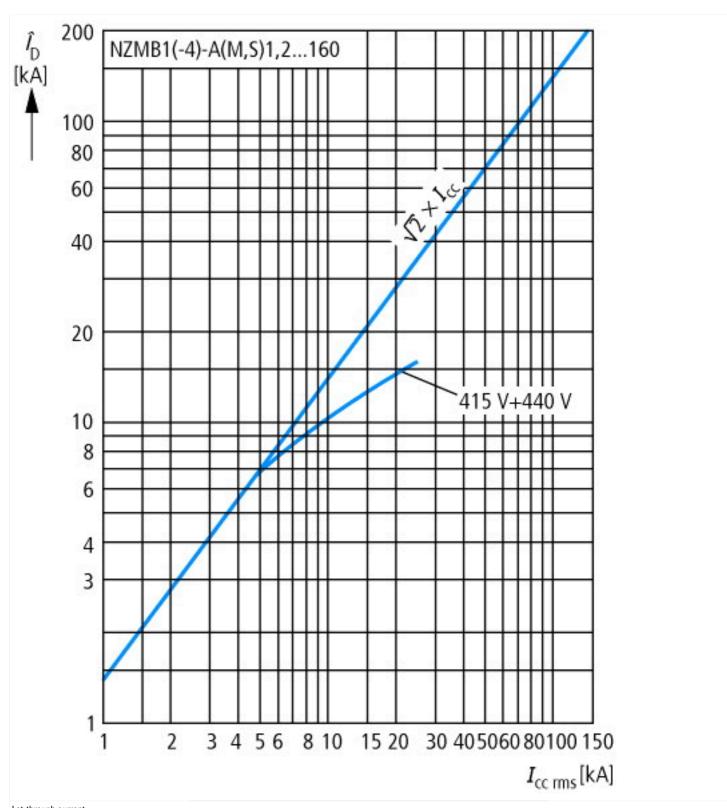

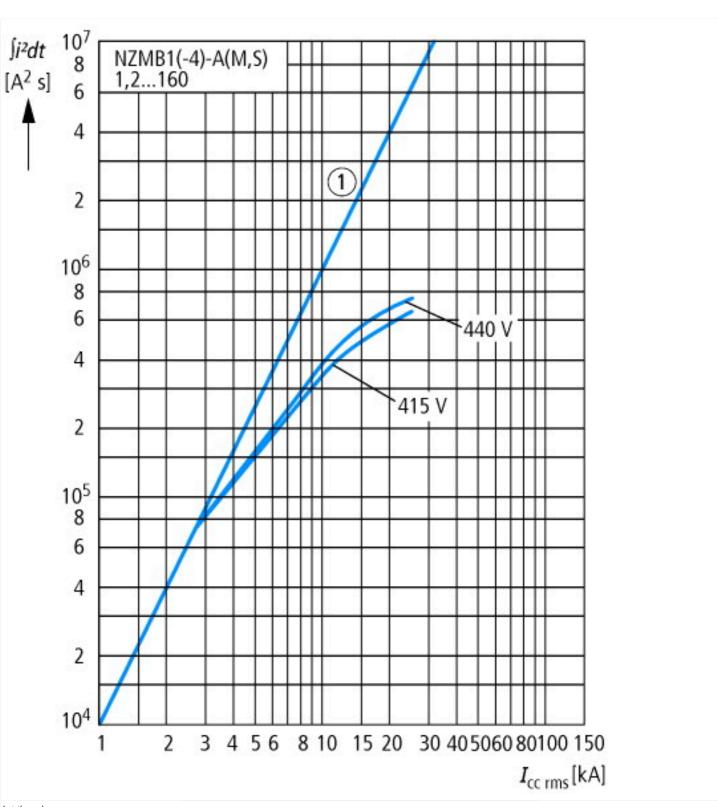

Dimensions

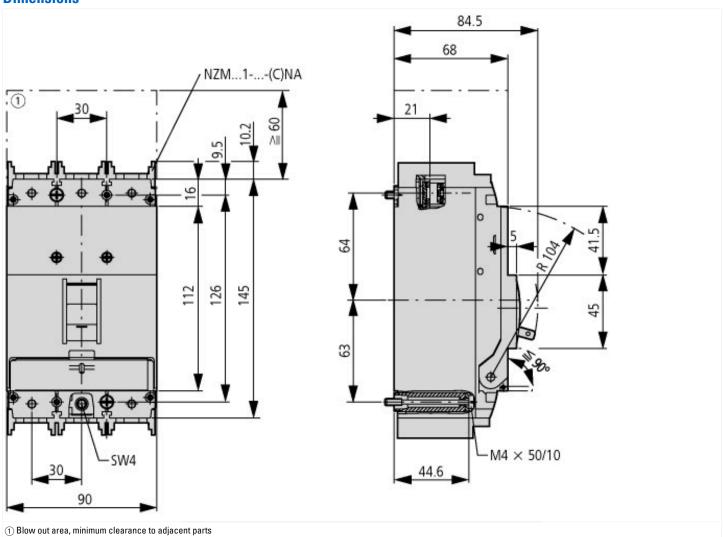

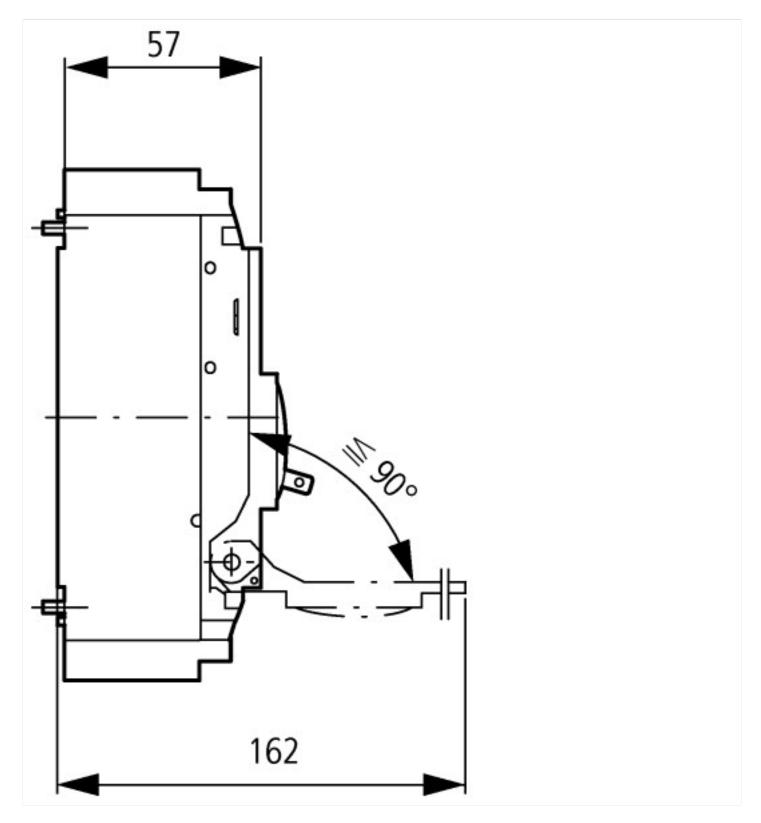

Additional product information (links)

Temperature dependency, Derating	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172
CurveSelect characteristics program	http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm
additional technical information for NZM power switch	https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf