


LUXOMAT® SCT1

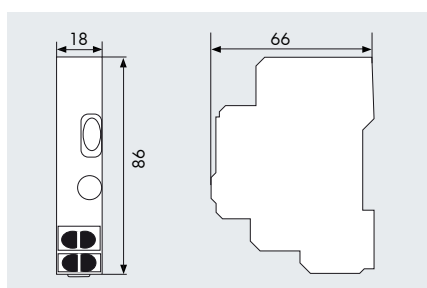

TECHNICAL DATA

	230 VAC $\pm 10\%$, 50 - 60 Hz
	IP20 / Class II / CC
	L 18 x W 85 x D 65 mm
	-25°C to +50°C
	UV- and shock-resistant polycarbonate
	2300 W/10 A, $\cos\varphi = 1$ 3 or 4-wire circuit max. 100 mA in standby mode for illuminated switches with glow lamps
	30 sec. - 10 min.

When the SCT1 is used in conjunction with the Indoor 180-SC, existing manual stair light circuits can be upgraded to an automatic system without the need for any complex new wiring. The automatic system only switches on the lighting as required, based on movement and luminosity.

PRODUCT INFORMATION

- The LUXOMAT® SCT1 stair light timer switch is easy to install
- The casing used is DIN rail casing the size of a single space unit
- For use with B.E.G. LUXOMAT® Indoor-180-SC stair light switches or for pushbuttons
- Manual switch for timer or continuous light function
- Quick-fitting attachment for 35 mm DIN rail
- The wall switch (Indoor 180-SC, complete: 92650 and sensor insert for the Indoor 180-SC-FM: 92668 available as an accessory) switches on the stair light switches for a period of time that can be selected according to the light conditions present and when a movement is detected.
- Can be retrofitted
- Low-noise
- Advance warning of switch-off for lag times > 2 min.
- **Application examples:** staircases, hallways, underground car parks

ACCESSORY (OPTIONAL)

Indoor 180-SC,
fully fitted



Indoor 180-SC,
sensor insert



Description	Colour	Part number
SCT 1	white	92655
Accessory (optional)		
Indoor 180-SC, fully fitted	pure white, RAL9010	92650
Sensor insert for Indoor 180-SC-FM	–	92668