







**Circuit-breaker, 3p, 250A, +residual current circuit-breaker, 30mA, AC/DC sensitive**



**Part no. NZMH2-A250-FIA30**  
**Catalog No. 112629**


Similar to illustration

### Delivery program

|   |                                       |      |  |  |
|---|---------------------------------------|------|--|--|
| Product range   |                                       |      |  | Circuit-breaker  |
| Protective function   |                                       |      |  | System and cable protection, fire protection, personnel protection   |
| Standard/Approval   |                                       |      |  | IEC  |
| Installation type   |                                       |      |  | Fixed  |
| Release system  |                                       |      |  | Thermomagnetic release, AC/DC sensitive earth-fault release  |
| Construction size   |                                       |      |  | NZM2   |
| Description   |                                       |      |  | For equipment with power electronics, such as inverters and variable frequency drives<br>Ready-to-connect combination consisting of type B circuit-breaker and residual current circuit-breaker and type A passive section<br>Suitability for the application in three-phase systems without neutral conductor<br>Personnel protection and preventive fire protection for 0 - 100 kHz fault current frequency<br>Operational voltage range Type B 50 - 400 V AC (+ 10 %)<br>Type A functionality even without operational voltage for rated frequency of 50 Hz<br>Not UL/CSA approved<br>Adjusting buttons can be sealed.<br>Rated operating voltage 400 V AC (+/- 10 %)<br>Rated frequency 50 Hz<br>Rated fault current $I_{\Delta n} = 0.03$ A<br>Depending on the cable manufacturer up to 240 mm <sup>2</sup> can be connected |
| Number of poles   |                                       |      |  | 3 pole   |
| Standard equipment  |                                       |      |  | Screw connection   |
| Rated operational voltage   | U <sub>e</sub>                        | V AC |  | 400  |
| <b>Switching capacity</b>   |                                       |      |  |  |
| 400/415 V 50 Hz   | I <sub>cu</sub>                       | kA   |  | 150  |
| <b>Rated current = rated uninterrupted current</b>                                  |                                       |      |  |  |
| Rated current = rated uninterrupted current   | I <sub>n</sub> = I <sub>u</sub>       | A    |  | 250  |
| <b>Setting range</b>  |                                       |      |  |  |
| Overload trip   |                                       |      |  |  |
|  | I <sub>r</sub>                        | A    |  | 200 - 250  |
| Short-circuit releases  |                                       |      |  |  |
|  |                                       |      |  |  |
| Non-delayed   | I <sub>i</sub> = I <sub>n</sub> x ... |      |  | 6 - 10   |
|  |                                       |      |  |  |
| Short-circuit releases  | I <sub>rm</sub>                       | A    |  | 1500 - 2500  |
|  |                                       |      |  |  |

### Technical data

|                                   |  |  |  |  |
|-----------------------------------|--|--|--|--|
| <b>General</b>                    |  |  |  |  |
| Standards                         |  |  |  | IEC/EN 60947, VDE 0660, EN 62423: Type B                                       |
| Protection against direct contact |  |  |  | Finger and back of hand proof to VDE 0106 Part 100                             |
| Climatic proofing                 |  |  |  | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |

|   |      |  |  |
|---|------|--|--|
| Ambient temperature   |      |  |  |
| Ambient temperature, storage  | °C   |  | - 40 - + 70  |
| Operation   | °C   |  | -25 - +70  |
| Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27 | g    |  | 20 (half-sinusoidal shock 20 ms)   |
| Safe isolation to EN 61140  |      |  |  |
| Between auxiliary contacts and main contacts  | V AC |  | 500  |
| between the auxiliary contacts  | V AC |  | 300  |
| Weight  | kg   |  | 2.345  |
| Mounting position   |      |  | Vertical and 90° in all directions<br><br>With XFI earth-fault release:<br>- NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit<br>- NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit:<br>- NZM3, N3: vertical, 90° right/left<br>- NZM4, N4: vertical with remote operator:<br>- NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions |
| Direction of incoming supply  |      |  | bottom   |
| Degree of protection  |      |  |  |
| Device  |      |  | In the operating controls area: IP20 (basic degree of protection)  |
| Enclosures  |      |  | With insulating surround: IP40<br>With door coupling rotary handle: IP66   |
| Terminations  |      |  | Tunnel terminal: IP10<br>Phase isolator and strip terminal: IP00   |
| Other technical data (sheet catalogue)  |      |  | Temperature dependency, Derating   |

### Circuit-breakers

|   |             |      |       |
|---|-------------|------|-------|
| Rated current = rated uninterrupted current | $I_n = I_u$ | A    | 250   |
| Rated surge voltage invariability           |             |      |       |
| Main contacts                               | $U_{imp}$   | V    | 8000  |
| Auxiliary contacts                          |             | V    | 6000  |
| Rated operational voltage                   | $U_e$       | V AC | 400   |
| Overvoltage category/pollution degree       |             |      | III/3 |
| Rated insulation voltage                    | $U_i$       | V    | 1000  |
| Use in unearthed supply systems             |             | V    | ≤ 400 |

### Switching capacity

|   |            |    |       |
|---|------------|----|-------|
| Rated short-circuit making capacity   |            |    |       |
| 240 V   | $I_{cm}$   | kA | 330   |
| 400/415 V   | $I_{cm}$   | kA | 330   |
| Rated short-circuit breaking capacity $I_{cn}$  |            |    |       |
| Icu to IEC/EN 60947 test cycle O-t-CO   |            |    |       |
| 240 V 50/60 Hz  | $I_{cu}$   | kA | 150   |
| 400/415 V 50/60 Hz  | $I_{cu}$   | kA | 150   |
| Ics to IEC/EN 60947 test cycle O-t-CO-t-CO  |            |    |       |
| 240 V 50/60 Hz  | $I_{cs}$   | kA | 150   |
| 400/415 V 50/60 Hz  | $I_{cs}$   | kA | 150   |
| Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker. |            |    |       |
| Rated short-time withstand current  |            |    |       |
| t = 0.3 s   | $I_{cw}$   | kA | 1.9   |
| t = 1 s   | $I_{cw}$   | kA | 1.9   |
| Utilization category to IEC/EN 60947-2  |            |    | A     |
| Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release)   | Operations |    | 20000 |
| Lifespan, electrical  |            |    |       |
| AC-1  |            |    |       |
| 400 V 50/60 Hz  | Operations |    | 10000 |

|                                   |            |       |
|-----------------------------------|------------|-------|
| 415 V 50/60 Hz                    | Operations | 10000 |
| AC--3                             |            |       |
| 400 V 50/60 Hz                    | Operations | 6500  |
| 415 V 50/60 Hz                    | Operations | 6500  |
| Max. operating frequency          | Ops/h      | 120   |
| Total break time at short-circuit | ms         | < 10  |

### Terminal capacity

|   |      |                 |   |
|---|------|-----------------|---|
| Standard equipment  |      |                 | Screw connection                                      |
| Optional accessories                                      |      |                 | Box terminal<br>Tunnel terminal<br>connection on rear |
| Round copper conductor                                    |      |                 |   |
| Box terminal  |      |                 |   |
| Solid   |      | mm <sup>2</sup> | 1 x (10 - 16)<br>2 x (6 - 16)                         |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 185)<br>2 x (25 - 70)                       |
| Tunnel terminal   |      |                 |   |
| Solid   |      | mm <sup>2</sup> | 1 x 16  |
| Stranded  |      |                 |   |
| 1-hole  |      | mm <sup>2</sup> | 1 x (25 - 185)  |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Direct on the switch                                      |      |                 |   |
| Solid   |      | mm <sup>2</sup> | 1 x (10 - 16)<br>2 x (6 - 16)                         |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 185)<br>2 x (25 - 70)                       |
| Al circular conductor                                     |      |                 |   |
| Tunnel terminal   |      |                 |   |
| Solid   |      | mm <sup>2</sup> | 1 x 16  |
| Stranded  |      |                 |   |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 185)  |
| Cu strip (number of segments x width x segment thickness) |      |                 |   |
| Box terminal  |      |                 |   |
|   | min. | mm              | 2 x 9 x 0.8   |
|   | max. | mm              | 10 x 16 x 0.8<br>(2x) 8 x 15.5 x 0,8                  |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Flat copper strip, with holes                             | min. | mm              | 2 x 16 x 0.8  |
| Flat copper strip, with holes                             | max. | mm              | 10 x 24 x 0.8   |
| Copper busbar (width x thickness)                         |      | mm              |   |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Screw connection  |      |                 | M8  |
| Direct on the switch                                      |      |                 |   |
|   | min. | mm              | 16 x 5  |
|   | max. | mm              | 24 x 8  |
| Control cables  |      |                 |   |
|   |      | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 1.5)                  |

### Design verification as per IEC/EN 61439

|  |                  |    |       |
|--|------------------|----|-------|
| Technical data for design verification                   |                  |    |       |
| Rated operational current for specified heat dissipation | I <sub>n</sub>   | A  | 250   |
| Equipment heat dissipation, current-dependent            | P <sub>vid</sub> | W  | 58.13 |
| Operating ambient temperature min.                       |                  | °C | -25   |
| Operating ambient temperature max.                       |                  | °C | 70    |
| IEC/EN 61439 design verification                         |                  |    |       |
| 10.2 Strength of materials and parts                     |                  |    |       |

|  |  |  |
|--|--|--|
| 10.2.2 Corrosion resistance  |  | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |  | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |  | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013])


|   |    |  |
|---|----|--|
| Rated permanent current I <sub>u</sub>                                | A  | 250                                      |
| Rated voltage   | V  | 690 - 690                                |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz | kA | 150                                      |
| Overload release current setting                                      | A  | 200 - 250                                |
| Adjustment range short-term delayed short-circuit release             | A  | 0 - 0                                    |
| Adjustment range undelayed short-circuit release                      | A  | 1500 - 2500                              |
| Integrated earth fault protection                                     |    | No                                       |
| Type of electrical connection of main circuit                         |    | Screw connection                         |
| Device construction   |    | Built-in device fixed built-in technique |
| Suitable for DIN rail (top hat rail) mounting                         |    | No                                       |
| DIN rail (top hat rail) mounting optional                             |    | Yes                                      |
| Number of auxiliary contacts as normally closed contact               |    | 0  |
| Number of auxiliary contacts as normally open contact                 |    | 0  |
| Number of auxiliary contacts as change-over contact                   |    | 0  |
| With switched-off indicator   |    | No                                       |
| With under voltage release  |    | No                                       |
| Number of poles   |    | 3  |
| Position of connection for main current circuit                       |    | Front side                               |
| Type of control element   |    | Rocker lever                             |
| Complete device with protection unit                                  |    | Yes                                      |
| Motor drive integrated  |    | No                                       |
| Motor drive optional  |    | Yes                                      |
| Degree of protection (IP)   |    | IP20                                     |

# Characteristics





Let-through current

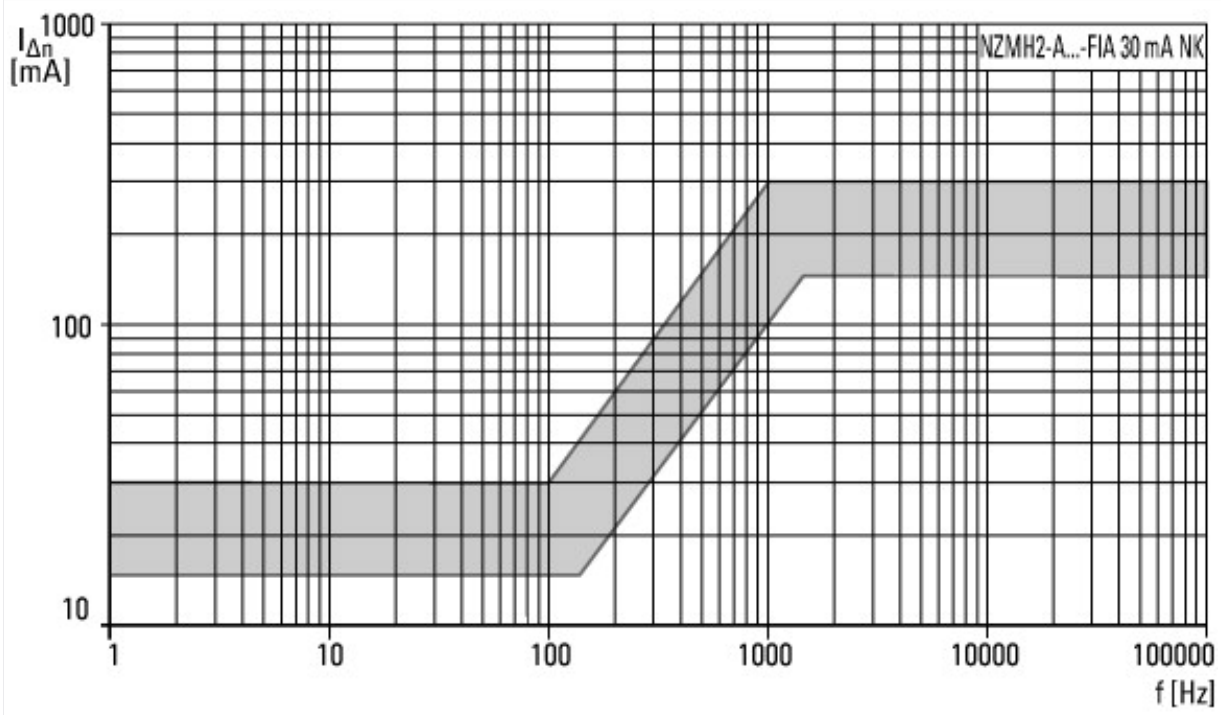

Let-through energy







## Additional product information (links)

### IL01219040Z Residual current device with 3 pole NZM2, AC/DC

|   |   |
|---|---|
| IL01219040Z Residual current device with 3 pole NZM2, AC/DC | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219040Z2017_03.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219040Z2017_03.pdf</a>   |
| Temperature dependency, Derating                            | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172</a>   |
| CurveSelect characteristics program                         | <a href="http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm">http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm</a> |
| additional technical information for NZM power switch       | <a href="ftp://ftp.moeller.net/DOCUMENTATION/PDF/nzm_technic_de_en.pdf">ftp://ftp.moeller.net/DOCUMENTATION/PDF/nzm_technic_de_en.pdf</a>   |