



**DOL starter, 380 V 400 V 415 V: 0.37 kW, 100 kA, I<sub>r</sub>: 0.3 - 1.2 A, Connection to SmartWire-DT: yes, 24 V DC, DC Voltage**



**Part no. MSC-DEA-1,2-M17(24VDC)**  
**Catalog No. 168804**  
**Alternate Catalog No. XTSEA1P2B017CTDNL**

**Delivery program**

|   |                |    |           |  |
|---|----------------|----|-----------|--|
| Basic function                                |                |    |           | DOL starters (complete devices)  |
| Basic device                                  |                |    |           | MSC  |
|   |                |    |           |  |
| Notes   |                |    |           | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. |
| Connection to SmartWire-DT                    |                |    |           | yes<br>in conjunction with PKE-SWD-32 SmartWire DT PKE module  |
| <b>Motor ratings</b>                          |                |    |           |  |
| Motor rating                                  |                |    |           |  |
| AC-3  |                |    |           |  |
| 380 V 400 V 415 V                             | P              | kW | 0.37      |  |
| 500 V   | P              | kW | 0.37      |  |
| Rated operational current                     |                |    |           |  |
| AC-3  |                |    |           |  |
| 380 V 400 V 415 V                             | I <sub>e</sub> | A  | 1.1       |  |
| 500 V   | I <sub>e</sub> | A  | 0.9       |  |
| Rated short-circuit current 380 - 415 V       | I <sub>q</sub> | kA | 100       |  |
| Rated conditional short-circuit current 500 V | I <sub>q</sub> | kA | 10        |  |
| <b>Setting range</b>                          |                |    |           |  |
| Setting range of overload releases            | I <sub>r</sub> | A  | 0.3 - 1.2 |  |
|   |                |    |           |  |
| Coordination                                  |                |    |           | Type of coordination "1"<br>Type of coordination "2"   |
| Contact sequence                              |                |    |           |  |
| Actuating voltage                             |                |    |           | 24 V DC  |

**Motor-protective circuit-breakers PKE12/XTUA-1,2**

Contactor DILM17-01(...)

**DOL starter wiring set**

Mechanical connection element and electrical electric contact module PKZM0-XDM32

**Notes**

The DOL starter (complete devices) consists of a PKE motor protective circuit breaker and a DILM contactor.

With the adapter-less top-hat rail mounting of starters up to 15 A, only the motor-protective circuit-breaker on the top-hat rail requires an adapter.

The contactors are provided with mechanical support via a mechanical connection element.

Control wire guide with max. 6 conductors up to 2.5°mm external diameter or 4 conductors up to 3.5°mm external diameter.

From 16 A, the motor-protective circuit-breaker and contactor are mounted on the top-hat rail adapter plate.

The connection of the main circuit between PKE and contactor is established with electrical contact modules.

When using DILA-XHIT... auxiliary contacts with MSC-DE-... DOL starters, the plug-in electrical connectors can be removed without removing the front-mounted auxiliary contact.


Cannot be combined with NHI-E...PKZ0-C.

MSC-DEA... DOL starters are prepared for communications via SmartWire-DT. In order to be used this way, they first need to be expanded with the PKE-SWD-32 communications module.

Motor output/rated motor current

| Motor rating | Rated motor current    |                        |                       |                       |                       |                        |                      |
|--------------|------------------------|------------------------|-----------------------|-----------------------|-----------------------|------------------------|----------------------|
| AC-3         | 220 V                  | 380 V                  | 415 V                 | 440 V                 | 500 V                 | 500 V                  | 660 V                |
|              | 230 V                  | 400 V                  |                       |                       |                       | with                   | 690 V                |
|              | 240 V                  |                        |                       |                       |                       | CL-PKZ0                |                      |
|              | $I_q = 100 \text{ kA}$ | $I_q = 100 \text{ kA}$ | $I_q = 65 \text{ kA}$ | $I_q = 65 \text{ kA}$ | $I_q = 10 \text{ kA}$ | $I_q = 100 \text{ kA}$ | $I_q = 3 \text{ kA}$ |
| P            | l                      | l                      | l                     | l                     | l                     | l                      | l                    |
| kW           | A                      | A                      | A                     | A                     | A                     | A                      | A                    |
| 0.06         | 0.37                   | -                      | -                     | -                     | -                     | -                      | -                    |
| 0.09         | 0.54                   | 0.31                   | 0.31                  | -                     | -                     | -                      | -                    |
| 0.12         | 0.72                   | 0.41                   | 0.41                  | 0.37                  | 0.33                  | 0.33                   | -                    |
| 0.18         | 1.04                   | 0.6                    | 0.6                   | 0.54                  | 0.48                  | 0.48                   | 0.35                 |
| 0.25         | -                      | 0.8                    | 0.8                   | 0.76                  | 0.7                   | 0.7                    | 0.5                  |
| 0.37         | -                      | 1.1                    | 1.1                   | 1.02                  | 0.9                   | 0.9                    | 0.7                  |
| 0.55         | -                      | -                      | -                     | -                     | -                     | -                      | 0.9                  |
| 0.75         | -                      | -                      | -                     | -                     | -                     | -                      | 1.1                  |

**Technical data****General**
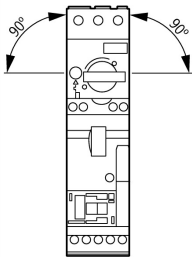
|                     |  |  |
|---------------------|--|--|
| Standards           |  | IEC/EN 60947-4-1, VDE 0660   |
| Mounting position   |  |  |
| Ambient temperature |  | -25 - +55  |

**Main conducting paths**

|                                       |           |      |  |
|---------------------------------------|-----------|------|--|
| Rated impulse withstand voltage       | $U_{imp}$ | V AC | 6000   |
| Overvoltage category/pollution degree |           |      | III/3  |
| Rated operational voltage             | $U_e$     | V    | 230 - 415  |
| Rated operational current             |           |      |  |
| Open, 3-pole: 50 – 60 Hz              |           |      |  |
| 380 V 400 V                           | $I_e$     | A    | 1.2  |
| AC-4 cycle operation                  |           |      |  |
| Minimum current flow times            |           | ms   | 500 (Class 5)<br>700 (Class 10)<br>900 (Class 15)<br>1000 (Class 20)   |
| Minimum cut-out periods               |           | ms   | 500  |
| Note                                  |           | ms   | In AC-4 cycle operation, going below the minimum current flow time can cause overheating of the load (motor).<br>For all combinations with an SWD activation, you need not adhere to the minimum current flow times and minimum cut-out periods. |

## Additional technical data

|   |  |   |   |
|---|--|---|---|
| Motor protective circuit breaker PKZM0, PKE |  |   | PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/<br>PKZM0 product group<br>DILM contactors, see contactor product group<br>DILET timing relay, ETR, see contactors, electronic timing relays product group |
| DILM contactors                             |  |   |   |
| Current heat loss                           |  |   |   |
| Current heat loss at $I_g$ to AC-3/400 V    |  | W | 1.2   |

## Power consumption

|             |         |   |      |
|-------------|---------|---|------|
| DC operated | Sealing | W | 0.86 |
|-------------|---------|---|------|

## Design verification as per IEC/EN 61439


|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 1.2  |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 0.4  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 1.2  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 0.86   |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 55   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |            |    |  |
| 10.9.2 Power-frequency electric strength   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |            |    |  |
|  |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |            |    |  |
|  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |            |    |  |
|  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |            |    |  |
|  |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

|  |  |   |                |
|--|--|---|----------------|
| Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)  |  |   |                |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013]) |  |   |                |
| Kind of motor starter  |  |   | Direct starter |
| With short-circuit release   |  |   | Yes            |
| Rated control supply voltage $U_s$ at AC 50HZ  |  | V | 0 - 0          |
| Rated control supply voltage $U_s$ at AC 60HZ  |  | V | 0 - 0          |
| Rated control supply voltage $U_s$ at DC   |  | V | 24 - 24        |

|  |    |                  |
|--|----|------------------|
| Voltage type for actuating   |    | DC               |
| Rated operation power at AC-3, 230 V, 3-phase                            | kW | 0.18             |
| Rated operation power at AC-3, 400 V                                     | kW | 1.1              |
| Rated power, 460 V, 60 Hz, 3-phase                                       | kW | 0                |
| Rated power, 575 V, 60 Hz, 3-phase                                       | kW | 0                |
| Rated operation current I <sub>e</sub>                                   | A  | 1.2              |
| Rated operation current at AC-3, 400 V                                   | A  | 1.2              |
| Overload release current setting   | A  | 0.3 - 1.2        |
| Rated conditional short-circuit current, type 1, 480 Y/277 V             | A  | 0                |
| Rated conditional short-circuit current, type 1, 600 Y/347 V             | A  | 0                |
| Rated conditional short-circuit current, type 2, 230 V                   | A  | 100000           |
| Rated conditional short-circuit current, type 2, 400 V                   | A  | 100000           |
| Number of auxiliary contacts as normally open contact                    |    | 0                |
| Number of auxiliary contacts as normally closed contact                  |    | 1                |
| Ambient temperature, upper operating limit                               | °C | 60               |
| Temperature compensated overload protection                              |    | Yes              |
| Release class  |    | Adjustable       |
| Type of electrical connection of main circuit                            |    | Screw connection |
| Type of electrical connection for auxiliary- and control current circuit |    | Screw connection |
| Rail mounting possible   |    | Yes              |
| With transformer   |    | No               |
| Number of command positions  |    | 0                |
| Suitable for emergency stop  |    | No               |
| Coordination class according to IEC 60947-4-3                            |    | Class 2          |
| Number of indicator lights   |    | 0                |
| External reset possible  |    | No               |
| With fuse  |    | No               |
| Degree of protection (IP)  |    | IP00             |
| Degree of protection (NEMA)  |    | Other            |
| Supporting protocol for TCP/IP   |    | No               |
| Supporting protocol for PROFIBUS   |    | No               |
| Supporting protocol for CAN  |    | No               |
| Supporting protocol for INTERBUS   |    | No               |
| Supporting protocol for ASI  |    | No               |
| Supporting protocol for MODBUS   |    | No               |
| Supporting protocol for Data-Highway                                     |    | No               |
| Supporting protocol for DeviceNet  |    | No               |
| Supporting protocol for SUCONET  |    | No               |
| Supporting protocol for LON  |    | No               |
| Supporting protocol for PROFINET IO                                      |    | No               |
| Supporting protocol for PROFINET CBA                                     |    | No               |
| Supporting protocol for SERCOS   |    | No               |
| Supporting protocol for Foundation Fieldbus                              |    | No               |
| Supporting protocol for EtherNet/IP                                      |    | No               |
| Supporting protocol for AS-Interface Safety at Work                      |    | No               |
| Supporting protocol for DeviceNet Safety                                 |    | No               |
| Supporting protocol for INTERBUS-Safety                                  |    | No               |
| Supporting protocol for PROFIsafe  |    | No               |
| Supporting protocol for SafetyBUS p                                      |    | No               |
| Supporting protocol for other bus systems                                |    | Yes              |
| Width  | mm | 45               |
| Height   | mm | 242              |
| Depth  | mm | 128              |

## Dimensions

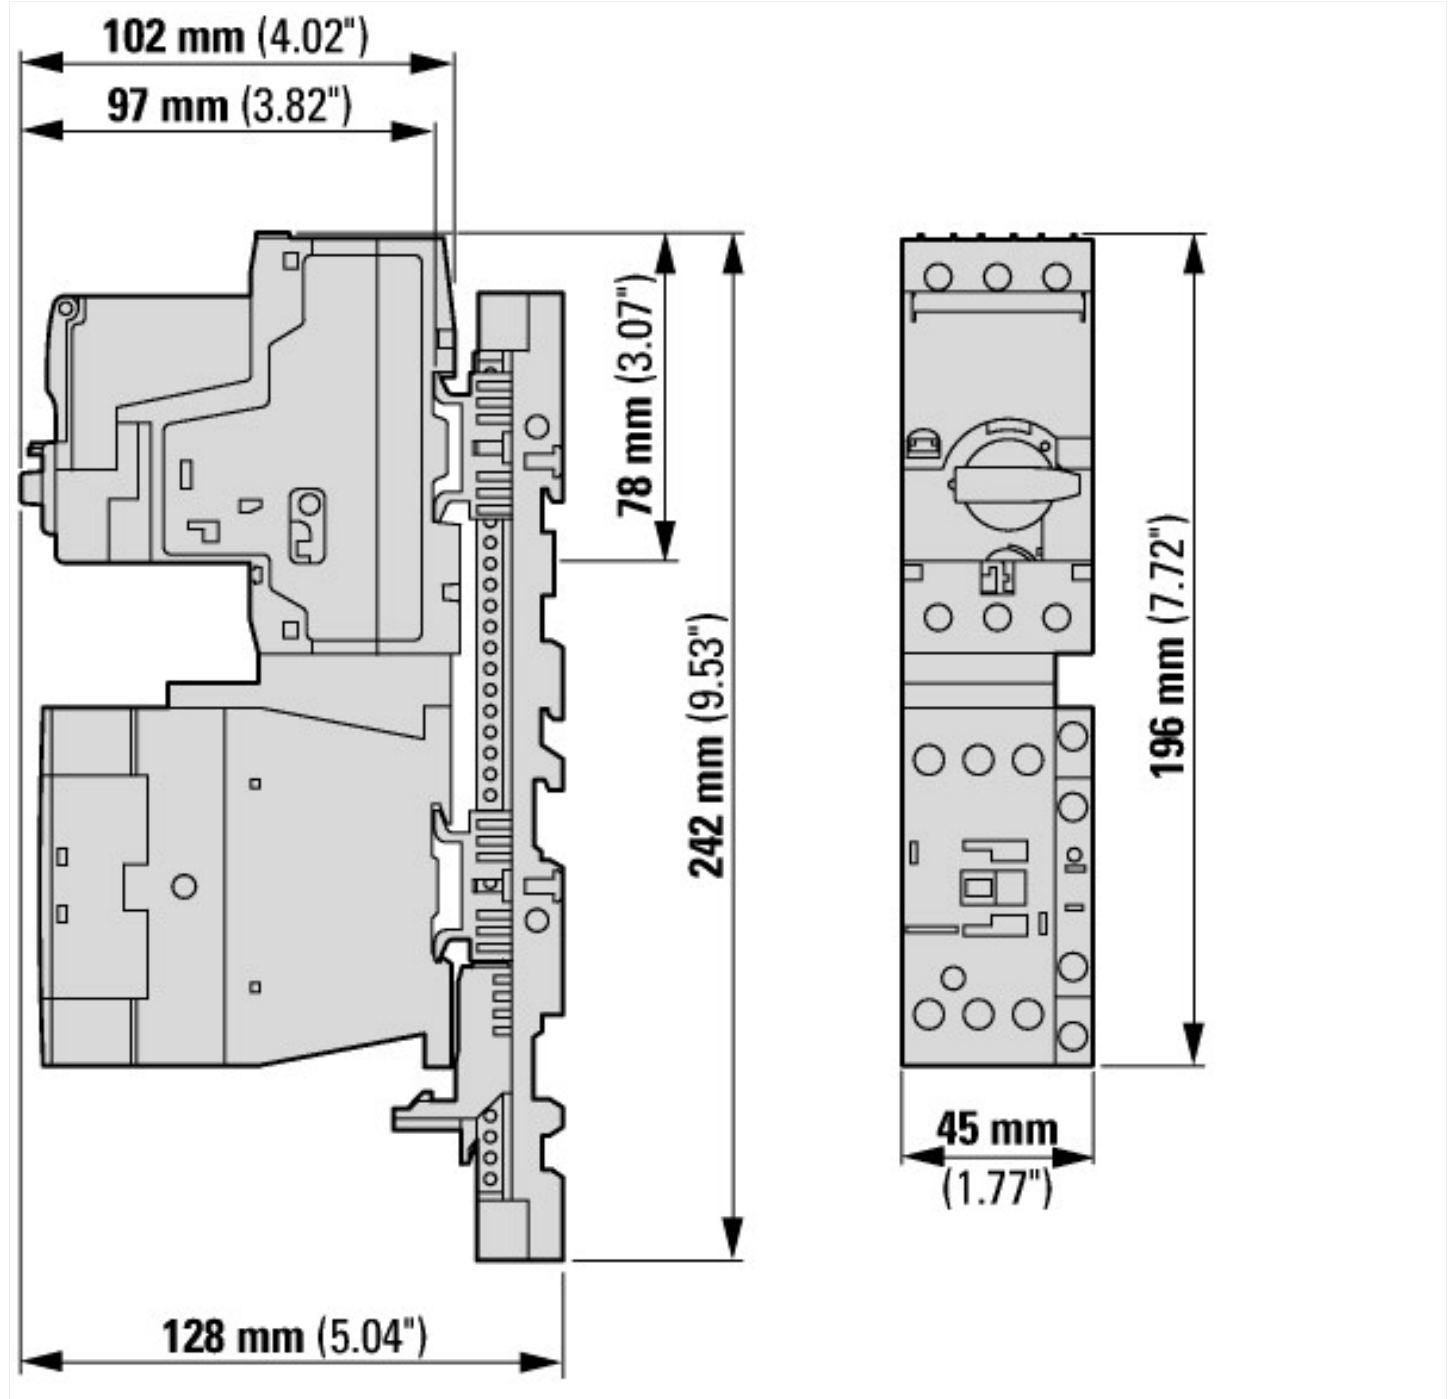

## Assets (links)

### Declaration of CE Conformity

00003119

### Instruction Leaflets

IL03402010Z2018\_05

## Additional product information (links)

### IL03402010Z (AWA1210-2265) DOL starter up to 32 A

IL03402010Z (AWA1210-2265) DOL starter up to 32 A [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03402010Z2018\\_05.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402010Z2018_05.pdf)

Moeller\_Online Selections Aids <http://www.moeller.net/en/support/slider/index.jsp>