






**Circuit-breaker, 3p, 40A 1000V**

**Part no. NZMH2-A40-S1**  
**Catalog No. 290358**

**EL-Nummer (Norway) 0004359034**

Similar to illustration

## Delivery program

|   |                          |    |   |
|---|--------------------------|----|---|
| Product range   |                          |    | Circuit-breaker                                   |
| Protective function   |                          |    | System and cable protection                       |
| Standard/Approval   |                          |    | IEC   |
| Installation type   |                          |    | Fixed   |
| Release system  |                          |    | Thermomagnetic release                            |
| Construction size   |                          |    | NZM2  |
| Description   |                          |    | NZM...S1 terminal type: NZM...XKSA cover required |
| Number of poles   |                          |    | 3 pole  |
| Standard equipment  |                          |    | Screw connection                                  |
| Rated current = rated uninterrupted current   | $I_n = I_u$              | A  | 40  |
| <b>Switching capacity</b>   |                          |    |   |
| 1000 V 50/60 Hz   | $I_{cu}$                 | kA | 10  |
| <b>Setting range</b>  |                          |    |   |
| Overload trip   |                          |    |   |
|  | $I_r$                    | A  | 32 - 40   |
| Short-circuit releases  |                          |    |   |
|  |                          |    |   |
| Non-delayed   | $I_i = I_n \times \dots$ |    | 8 - 10  |
|  |                          |    |   |

## Technical data

### Circuit-breakers

|   |             |      |             |
|---|-------------|------|-------------|
| Rated surge voltage invariability           | $U_{imp}$   |      |             |
| Main contacts                               |             | V    | 8000        |
| Auxiliary contacts                          |             | V    | 6000        |
| Rated operational voltage                   | $U_e$       | V AC | 1000        |
| Rated current = rated uninterrupted current | $I_n = I_u$ | A    | 40          |
| Overvoltage category/pollution degree       |             |      | III/3       |
| Rated insulation voltage                    | $U_i$       | V    | 1000        |
| Utilization category                        |             |      | A           |
| Ambient temperature                         |             |      |             |
| Ambient temperature, storage                |             | °C   | - 40 - + 70 |
| Operation                                   |             | °C   | -25 - +70   |

### Rated short-circuit making capacity

|                    |          |    |     |
|--------------------|----------|----|-----|
| 240 V 50/60 Hz     | $I_{cm}$ | kA | 330 |
| 400/415 V 50/60 Hz | $I_{cm}$ | kA | 330 |
| 440 V 50/60 Hz     | $I_{cm}$ | kA | 286 |
| 525 V 50/60 Hz     | $I_{cm}$ | kA | 105 |
| 690 V 50/60 H      | $I_c$    | kA | 40  |
| 1000 V 50/60 Hz    | $I_{cm}$ | kA | 17  |

## Rated short-circuit breaking capacity $I_{cn}$

|  |                 |    |      |
|--|-----------------|----|------|
| I <sub>cu</sub> to IEC/EN 60947 test cycle O-t-CO      | I <sub>cu</sub> | kA |      |
| 240 V 50/60 Hz   | I <sub>cu</sub> | kA | 150  |
| 400/415 V 50 Hz  | I <sub>cu</sub> | kA | 150  |
| 440 V 50/60 Hz   | I <sub>cu</sub> | kA | 130  |
| 525 V 50/60 Hz   | I <sub>cu</sub> | kA | 50   |
| 690 V 50/60 Hz   | I <sub>cu</sub> | kA | 20   |
| 1000 V 50/60 Hz  | I <sub>cu</sub> | kA | 10   |
| I <sub>cs</sub> to IEC/EN 60947 test cycle O-t-CO-t-CO | I <sub>cs</sub> | kA |      |
| 230 V 50/60 Hz   | I <sub>cs</sub> | kA | 150  |
| 400/415 V 50/60 Hz                                     | I <sub>cs</sub> | kA | 150  |
| 440 V 50/60 Hz   | I <sub>cs</sub> | kA | 130  |
| 525 V 50/60 Hz   | I <sub>cs</sub> | kA | 37.5 |
| 690 V 50/60 Hz   | I <sub>cs</sub> | kA | 5    |
| 1000 V AC  | I <sub>cs</sub> | kA | 3    |

## Rated short-time withstand current

|   |                 |       |       |
|---|-----------------|-------|-------|
| t = 0.3 s   | I <sub>cw</sub> | kA    | 1.9   |
| t = 1 s   | I <sub>cw</sub> | kA    | 1.9   |
| Lifespan, mechanical  | Operations      |       | 20000 |
| Max. operating frequency  |                 | Ops/h | 120   |
| Lifespan, mechanical: of which max. 50 % trip by shunt/undervoltage release |                 |       |       |

## Lifespan, electrical

|                 |            |  |      |
|-----------------|------------|--|------|
| 1000 V 50/60 Hz | Operations |  | 3000 |
|-----------------|------------|--|------|

## Terminal capacity

|   |      |                 |                                      |
|---|------|-----------------|--------------------------------------|
| Standard equipment  |      |                 | Screw connection                     |
| Round copper conductor  |      |                 |                                      |
| Box terminal  |      |                 |                                      |
| Solid   |      | mm <sup>2</sup> | 1 x (10 - 16)<br>2 x (6-16)          |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 185)<br>2 x (25-70)        |
| Tunnel terminal   |      |                 |                                      |
| Solid   |      | mm <sup>2</sup> | 1 x 16                               |
| Stranded  |      |                 |                                      |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 185)                       |
| Bolt terminal and rear-side connection  |      |                 |                                      |
| Direct on the switch  |      |                 |                                      |
| Solid   |      | mm <sup>2</sup> | 1 x (10 - 16)<br>2 x (10 - 16)       |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 50)<br>2 x (25 - 50)       |
| Al conductors, Cu cable   |      |                 |                                      |
| Tunnel terminal   |      |                 |                                      |
| Solid   |      | mm <sup>2</sup> | 1 x 16                               |
| Stranded  |      |                 |                                      |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 185) <sup>2)</sup>         |
| <sup>2)</sup> Up to 240 mm <sup>2</sup> can be connected depending on the cable manufacturer. |      |                 |                                      |
| Cu strip (number of segments x width x segment thickness)                                     |      |                 |                                      |
| Box terminal  |      |                 |                                      |
|   | min. | mm              | 2 x 9 x 0.8                          |
|   | max. | mm              | 10 x 16 x 0.8<br>(2x) 8 x 15.5 x 0,8 |
| Bolt terminal and rear-side connection  |      |                 |                                      |
| Flat copper strip, with holes   | min. | mm              | 2 x 16 x 0.8                         |
| Flat copper strip, with holes   | max. | mm              | 10 x 16 x 0.8                        |
| Copper busbar (width x thickness)   | mm   |                 |                                      |

|  |      |                 |                                      |
|--|------|-----------------|--------------------------------------|
| Bolt terminal and rear-side connection |      |                 |                                      |
| Screw connection                       |      |                 | M8                                   |
| Direct on the switch                   |      |                 |                                      |
|  | min. | mm              | 16 x 5                               |
|  | max. | mm              | 24 x 8                               |
| Control cables                         |      |                 |                                      |
|  |      | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 1.5) |

## Design verification as per IEC/EN 61439

|  |                  |    |  |
|--|------------------|----|--|
| Technical data for design verification   |                  |    |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>   | A  | 40   |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub> | W  | 13.44  |
| Operating ambient temperature min.   |                  | °C | -25  |
| Operating ambient temperature max.   |                  | °C | 70   |
| IEC/EN 61439 design verification   |                  |    |  |
| 10.2 Strength of materials and parts   |                  |    |  |
| 10.2.2 Corrosion resistance  |                  |    |  |
|  |                  |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                  |    |  |
|  |                  |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                  |    |  |
|  |                  |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |    |  |
|  |                  |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                  |    |  |
|  |                  |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                  |    |  |
|  |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                  |    |  |
|  |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                  |    |  |
|  |                  |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                  |    |  |
|  |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                  |    |  |
|  |                  |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                  |    |  |
|  |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                  |    |  |
|  |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                  |    |  |
|  |                  |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                  |    |  |
|  |                  |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                  |    |  |
| 10.9.2 Power-frequency electric strength   |                  |    |  |
|  |                  |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                  |    |  |
|  |                  |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                  |    |  |
|  |                  |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                  |    |  |
|  |                  |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                  |    |  |
|  |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                  |    |  |
|  |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                  |    |  |
|  |                  |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

|   |  |    |  |
|---|--|----|--|
| Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)   |  |    |  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013]) |  |    |  |
| Rated permanent current I <sub>u</sub>  |  | A  | 40                                       |
| Rated voltage   |  | V  | 1000 - 1000                              |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz   |  | kA | 150                                      |
| Overload release current setting  |  | A  | 32 - 40                                  |
| Adjustment range short-term delayed short-circuit release   |  | A  | 0 - 0                                    |
| Adjustment range undelayed short-circuit release  |  | A  | 320 - 400                                |
| Integrated earth fault protection   |  |    | No                                       |
| Type of electrical connection of main circuit   |  |    | Screw connection                         |
| Device construction   |  |    | Built-in device fixed built-in technique |

|   |  |              |
|---|--|--------------|
| Suitable for DIN rail (top hat rail) mounting           |  | No           |
| DIN rail (top hat rail) mounting optional               |  | Yes          |
| Number of auxiliary contacts as normally closed contact |  | 0            |
| Number of auxiliary contacts as normally open contact   |  | 0            |
| Number of auxiliary contacts as change-over contact     |  | 0            |
| With switched-off indicator                             |  | No           |
| With under voltage release                              |  | No           |
| Number of poles   |  | 3            |
| Position of connection for main current circuit         |  | Front side   |
| Type of control element                                 |  | Rocker lever |
| Complete device with protection unit                    |  | Yes          |
| Motor drive integrated                                  |  | No           |
| Motor drive optional                                    |  | Yes          |
| Degree of protection (IP)                               |  | IP20         |

# Characteristics





Let-through current




Let-through energy

## Dimensions



① Blow out area, minimum clearance to adjacent parts



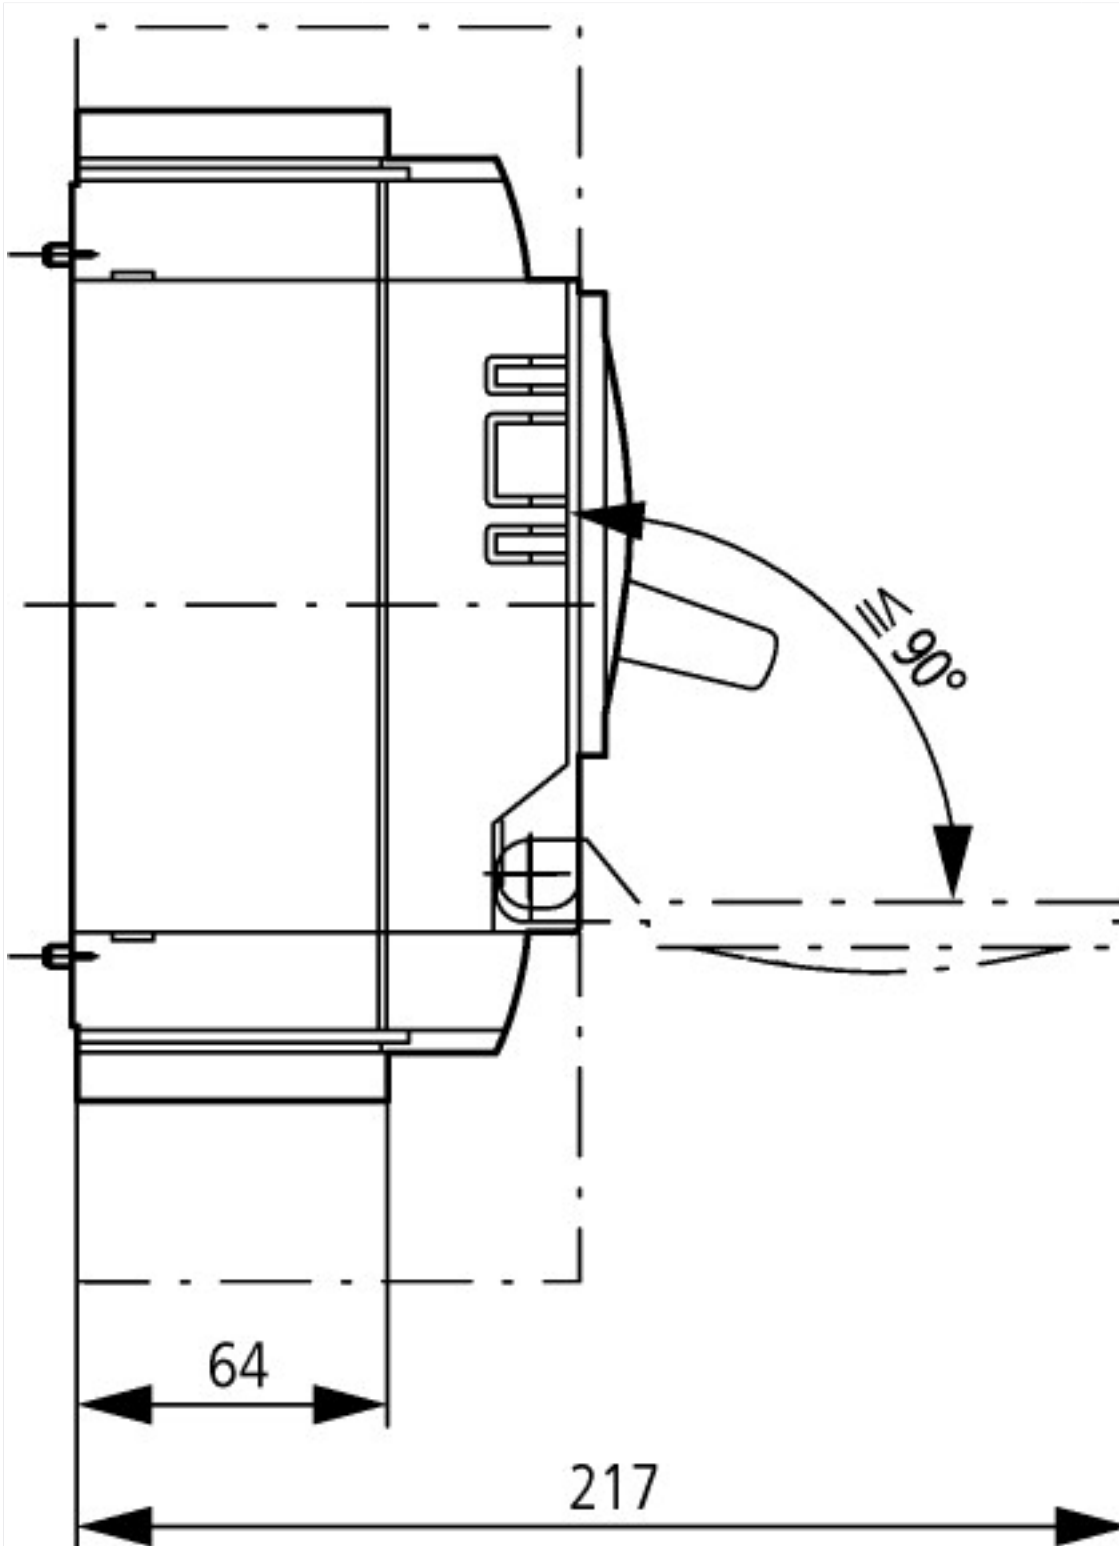

## Additional product information (links)

### IL01206006Z (AWA1230-1916) Circuit-Breaker, basic unit

|   |   |
|---|---|
| IL01206006Z (AWA1230-1916) Circuit-Breaker, basic unit  | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01206006Z2015_11.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01206006Z2015_11.pdf</a>   |
| Weight  | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.171">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.171</a>   |
| Temperature dependency, Derating  | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172</a>   |
| Effective power loss  | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.174">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.174</a>   |
| Selectivity, Back Up Protection and Coordination Guide  | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1198913.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1198913.pdf</a>                         |
| Setting-Specific Representation of Tripping Characteristics and Competent Assessment of their Interaction | <a href="http://www.moeller.net/binary/ver_techpapers/ver943en.pdf">http://www.moeller.net/binary/ver_techpapers/ver943en.pdf</a>   |
| Busbar Component Adapters for modern Industrial control panels  | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a>   |
| CurveSelect characteristics program   | <a href="http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm">http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm</a> |

|   |   |
|---|---|
| Eaton configurator                                    | <a href="http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/ConfiguratorCircuitBreaker/index.htm">http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/ConfiguratorCircuitBreaker/index.htm</a> |
| additional technical information for NZM power switch | <a href="ftp://ftp.moeller.net/DOCUMENTATION/PDF/nzm_technic_de_en.pdf">ftp://ftp.moeller.net/DOCUMENTATION/PDF/nzm_technic_de_en.pdf</a>   |