### DATASHEET - NZMH3-AE400-AVE

Part no.



Circuit-breaker, 3p, 400A, withdrawable unit



Catalog No.

NZMH3-AE400-AVE 110850




Similar to illustration

### **Delivery program**

| Draduat range                               |                                   |    | Circuit-breaker                               |
|---|-----------------------------------|----|---|
| Product range                               |                                   |    |   |
| Protective function                         |                                   |    | System and cable protection                   |
| Standard/Approval                           |                                   |    | IEC   |
| Installation type                           |                                   |    | Withdrawable                                  |
| Release system                              |                                   |    | Electronic release                            |
| Construction size                           |                                   |    | NZM3  |
| Description                                 |                                   |    | R.m.s. value measurement and "thermal memory" |
| Number of poles                             |                                   |    | 3 pole  |
| Standard equipment                          |                                   |    | Screw connection                              |
| Switching capacity                          |                                   |    |   |
| 400/415 V 50 Hz                             | l <sub>cu</sub>                   | kA | 150   |
| Rated current = rated uninterrupted current |                                   |    |   |
| Rated current = rated uninterrupted current | $I_n = I_u$                       | А  | 400   |
| Setting range                               |                                   |    |   |
| Overload trip                               |                                   |    |   |
| 「<br>「<br>「                                 | l <sub>r</sub>                    | A  | 200 - 400                                     |
| Short-circuit releases                      |                                   |    |   |
| Non-delayed                                 | l <sub>i</sub> = l <sub>n</sub> x |    | 2 - 11  |

## **Technical data**

| General   |      |  |
|---|------|--|
| Standards   |      | IEC/EN 60947   |
| Protection against direct contact   |      | Finger and back of hand proof to VDE 0106 Part 100                             |
| Climatic proofing   |      | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature   |      |  |
| Ambient temperature, storage  | °C   | - 40 - + 70  |
| Operation   | °C   | -25 - +70  |
| Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27 | g    | 20 (half-sinusoidal shock 20 ms)   |
| Safe isolation to EN 61140  |      |  |
| Between auxiliary contacts and main contacts  | V AC | 500  |
| between the auxiliary contacts  | V AC | 300  |
| Weight  | kg   | 6.34   |
| Mounting position   |      | Vertical and 90° in all directions   |



With XFI earth-fault release: - NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit - NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit: - NZM3, N3: vertical, 90° right/left - NZM4, N4: vertical

|   |                  |      | - NZM4, N4: vertical<br>with remote operator:<br>- NZM2, N(S)2, NZM3, N(S)3,<br>NZM4, N(S)4: vertical and 90° in all<br>directions                      |
|---|------------------|------|---|
| Direction of incoming supply  |                  |      | as required   |
| Degree of protection  |                  |      |   |
| Device  |                  |      | In the operating controls area: IP20 (basic degree of protection)   |
| Enclosures  |                  |      | With insulating surround: IP40<br>With door coupling rotary handle: IP66  |
| Terminations  |                  |      | Tunnel terminal: IP10<br>Phase isolator and strip terminal: IP00  |
| Other technical data (sheet catalogue)                                      |                  |      | Temperature dependency, Derating  |
| Circuit-breakers  |                  |      |   |
| Rated current = rated uninterrupted current                                 | $I_n = I_u$      | A    | 400   |
| Rated surge voltage invariability   | U <sub>imp</sub> |      |   |
| Main contacts   |                  | V    | 8000  |
| Auxiliary contacts  |                  | V    | 6000  |
| Rated operational voltage   | U <sub>e</sub>   | V AC | 690   |
| Overvoltage category/pollution degree                                       |                  |      | III/3   |
| Rated insulation voltage  | Ui               | V    | 1000  |
| Use in unearthed supply systems   |                  | V    | ≦ 690   |
| Switching capacity  |                  |      |   |
| Rated short-circuit making capacity   | I <sub>cm</sub>  |      |   |
| 240 V   | I <sub>cm</sub>  | kA   | 330   |
| 400/415 V   | I <sub>cm</sub>  | kA   | 330   |
| 440 V 50/60 Hz  | I <sub>cm</sub>  | kA   | 286   |
| 525 V 50/60 Hz  | I <sub>cm</sub>  | kA   | 143   |
| 690 V 50/60 H   | lc               | kA   | 74  |
| Rated short-circuit breaking capacity I <sub>cn</sub>                       | l <sub>cn</sub>  |      |   |
| Icu to IEC/EN 60947 test cycle 0-t-C0                                       | lcu              | kA   |   |
| 240 V 50/60 Hz  | Icu              | kA   | 150   |
| 400/415 V 50/60 Hz  | I <sub>cu</sub>  | kA   | 150   |
| 440 V 50/60 Hz  | I <sub>cu</sub>  | kA   | 130   |
| 525 V 50/60 Hz  |                  | kA   | 65  |
|   | I <sub>cu</sub>  |      |   |
| 690 V 50/60 Hz  | I <sub>cu</sub>  | kA   | 35  |
| Ics to IEC/EN 60947 test cycle 0-t-C0-t-C0                                  | lcs              | kA   |   |
| 240 V 50/60 Hz  | I <sub>cs</sub>  | kA   | 150   |
| 400/415 V 50/60 Hz  | I <sub>cs</sub>  | kA   | 150   |
| 440 V 50/60 Hz  | I <sub>cs</sub>  | kA   | 130   |
| 525 V 50/60 Hz  | I <sub>cs</sub>  | kA   | 33  |
| 690 V 50/60 Hz  | I <sub>cs</sub>  | kA   | 9<br>Maximum back-up fuse, if the expected short-circuit currents at the installation<br>location exceed the switching capacity of the circuit-breaker. |
| Rated short-time withstand current  |                  |      | issues overed are switching capacity of the circuit DICOVEL.  |
| t = 0.3 s   | I <sub>cw</sub>  | kA   | 3.3   |
| t = 1 s   | I <sub>cw</sub>  | kA   | 3.3   |
| Utilization category to IEC/EN 60947-2                                      |                  |      | A   |
| Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release) | Operations       |      | 15000   |
| Lifespan, electrical  |                  |      |   |
| AC-1  |                  |      |   |
| 400 V 50/60 Hz  | Operations       |      | 5000  |

| 415 V 50/60 Hz  | Operations |                 | 5000  |
|---|------------|-----------------|---|
| 690 V 50/60 Hz  | Operations |                 | 3000  |
| AC3   |            |                 |   |
| 400 V 50/60 Hz  | Operations |                 | 2000  |
| 415 V 50/60 Hz  | Operations |                 | 2000  |
| 690 V 50/60 Hz  | Operations |                 | 2000  |
| Max. operating frequency  |            | Ops/h           | 60  |
| Total break time at short-circuit   |            | ms              | < 10  |
| Terminal capacity   |            |                 |   |
| Standard equipment  |            |                 | Screw connection  |
| Accessories required  |            |                 | NZM3-XAVS   |
| Optional accessories  |            |                 | Box terminal<br>Tunnel terminal<br>connection on rear   |
| Round copper conductor  |            |                 |   |
| Box terminal  |            |                 |   |
| Solid   |            | mm <sup>2</sup> | 2 x 16  |
| Stranded  |            | mm <sup>2</sup> | 1 x (35 - 240)  |
| Tunnel terminal   |            | mm              | 2 x (25-120)  |
| Solid   |            | mm <sup>2</sup> | 1 x 16  |
| Stranded  |            |                 |   |
| 1-hole  |            | mm <sup>2</sup> | 1 x (16 - 185)  |
| Bolt terminal and rear-side connection  |            |                 |   |
| Direct on the switch  |            |                 |   |
| Solid   |            | mm <sup>2</sup> | 1 x 16<br>2 x 16  |
| Stranded  |            | mm <sup>2</sup> | 1 x (25 - 240)<br>2 x (25 - 240)  |
| Connection width extension  |            | mm <sup>2</sup> |   |
| Connection width extension  |            | mm <sup>2</sup> | 2 x 300   |
| Al circular conductor   |            |                 |   |
| Tunnel terminal   |            |                 |   |
| Solid   |            | mm <sup>2</sup> | 1 x 16  |
| Stranded  |            | mm              |   |
|   |            | 2               | 2)  |
| Stranded  |            | mm <sup>2</sup> | 1 x (25 - 185) <sup>2)</sup>  |
| Double hole   |            | mm <sup>2</sup> | 1 x (50 - 240)<br>2 x (50 - 240)<br><sup>2)</sup> Up to 240 mm <sup>2</sup> can be connected depending on the cable manufacturer. |
| Culotria (number of comparts sussidate sus sussidate sussidate sussidate sussid |            |                 | op to 240 minition be connected depending on the Cable Manufacturer.  |
| Cu strip (number of segments x width x segment thickness)   |            |                 |   |
| Box terminal  |            |                 | C 1 C 0 0   |
|   | min.       | mm              | 6 x 16 x 0.8  |
|   | max.       | mm              | 10 x 24 x 1.0<br>+ 5 x 24 x 1.0<br>(2 x) 8 x 24 x 1.0   |
| Bolt terminal and rear-side connection  |            |                 |   |
| Flat copper strip, with holes   | min.       | mm              | 6 x 16 x 0.8  |
| Flat copper strip, with holes   | max.       | mm              | 10 x 32 x 1.0 + 5 x 32 x 1.0  |
| Connection width extension  |            | mm              | (2 x) 10 x 50 x 1.0   |
| Copper busbar (width x thickness)   | mm         |                 |   |
| Bolt terminal and rear-side connection  |            |                 |   |
| Screw connection  |            |                 | M10   |
| Direct on the switch  |            |                 |   |
|   | min.       | mm              | 20 x 5  |
|   | max.       | mm              | 30 x 10<br>+ 30 x 5   |
| Connection width extension  |            | mm              |   |
| Connection width extension  | max.       | mm              | 2 x (10 x 50)   |
|   |            |                 |   |

# Design verification as per IEC/EN 61439


| Technical data for design verification   |                  |    |  |
|--|------------------|----|--|
| Rated operational current for specified heat dissipation   | I <sub>n</sub>   | А  | 400  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub> | W  | 48   |
| Operating ambient temperature min.   |                  | °C | -25  |
| Operating ambient temperature max.   |                  | °C | 70   |
| IEC/EN 61439 design verification   |                  |    |  |
| 10.2 Strength of materials and parts   |                  |    |  |
| 10.2.2 Corrosion resistance  |                  |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                  |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                  |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                  |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                  |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                  |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                  |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                  |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                  |    |  |
| 10.9.2 Power-frequency electric strength   |                  |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                  |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                  |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                  |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                  |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


#### **Technical data ETIM 7.0**


| Low-voltage industrial components (EG000017) / Power circuit-breaker for  | trafo/generator/installa | ation prote | ection (EC000228)                                 |
|---|--------------------------|-------------|---|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013]) |                          |             |   |
| Rated permanent current lu  |                          | А           | 400   |
| Rated voltage   |                          | V           | 690 - 690   |
| Rated short-circuit breaking capacity Icu at 400 V, 50 Hz   |                          | kA          | 150   |
| Overload release current setting  |                          | А           | 200 - 400   |
| Adjustment range short-term delayed short-circuit release   |                          | А           | 0 - 0   |
| Adjustment range undelayed short-circuit release  |                          | А           | 800 - 4400  |
| Integrated earth fault protection   |                          |             | No  |
| Type of electrical connection of main circuit   |                          |             | Screw connection                                  |
| Device construction   |                          |             | Built-in device slide-in technique (withdrawable) |
| Suitable for DIN rail (top hat rail) mounting   |                          |             | No  |
| DIN rail (top hat rail) mounting optional   |                          |             | No  |
| Number of auxiliary contacts as normally closed contact   |                          |             | 0   |
| Number of auxiliary contacts as normally open contact   |                          |             | 0   |
| Number of auxiliary contacts as change-over contact   |                          |             | 0   |


| With switched-off indicator                     | No           |
|---|--------------|
| With under voltage release                      | No           |
| Number of poles                                 | 3            |
| Position of connection for main current circuit | Front side   |
| Type of control element                         | Rocker lever |
| Complete device with protection unit            | Yes          |
| Motor drive integrated                          | No           |
| Motor drive optional                            | Yes          |
| Degree of protection (IP)                       | IP20         |


### **Characteristics**

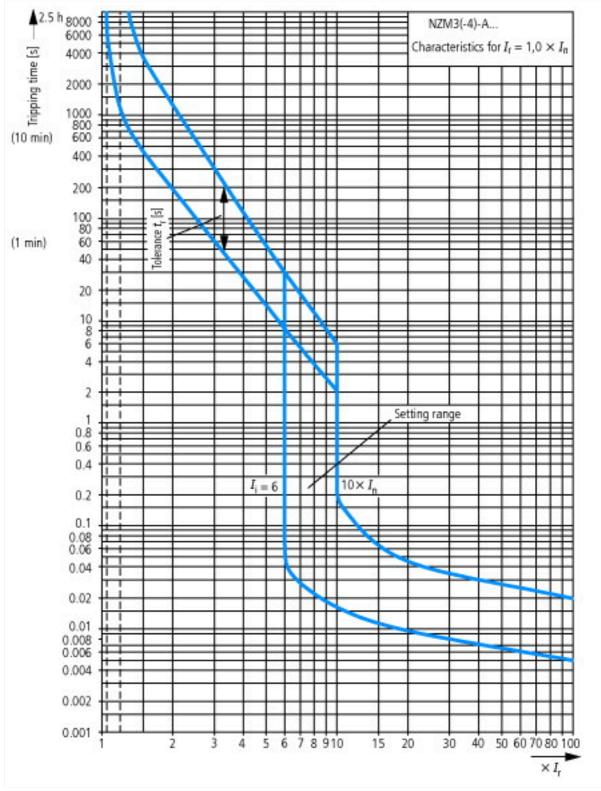

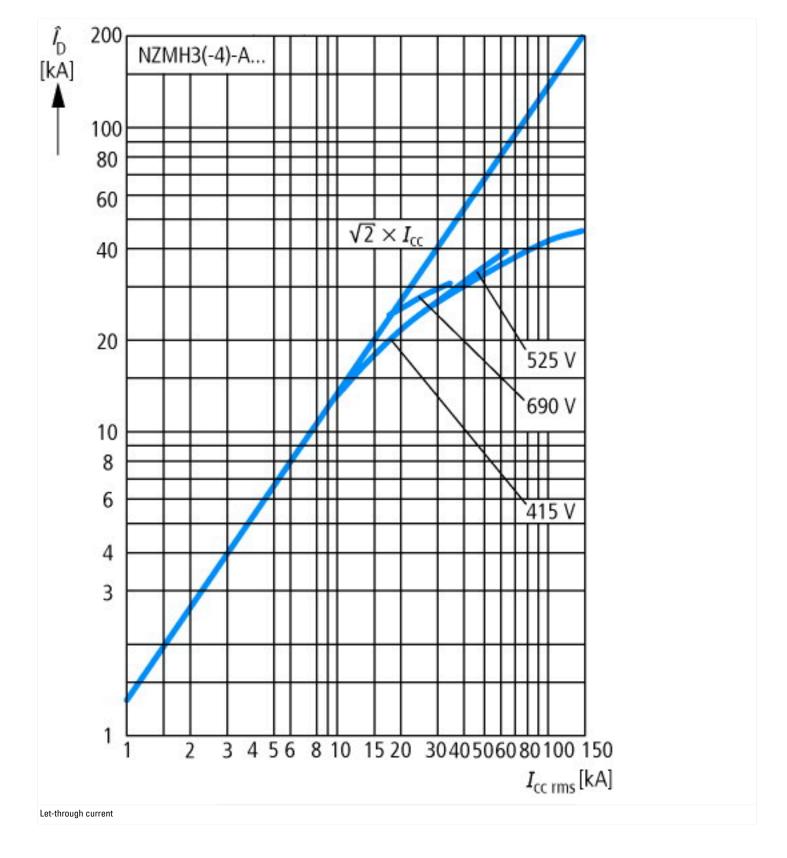

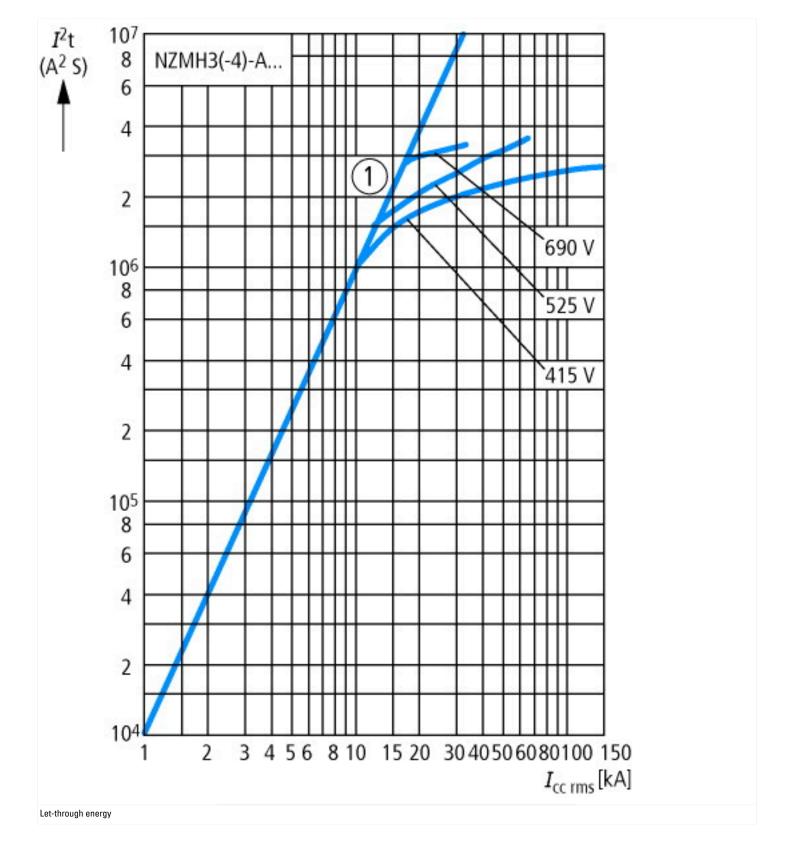

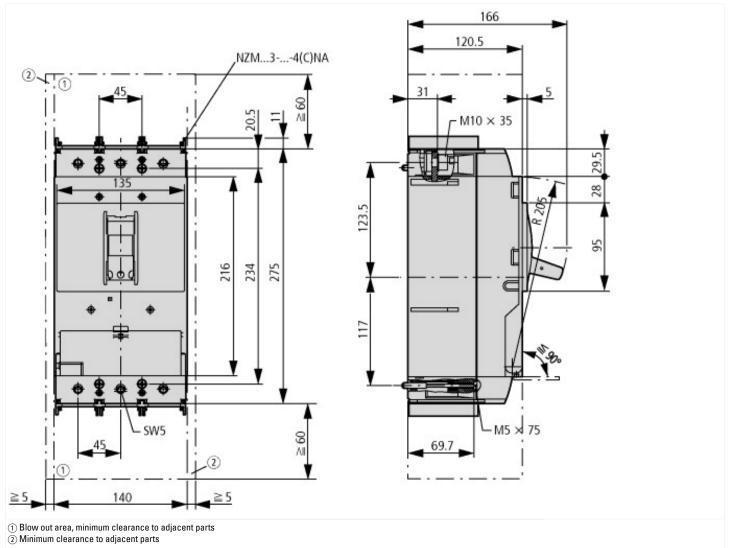

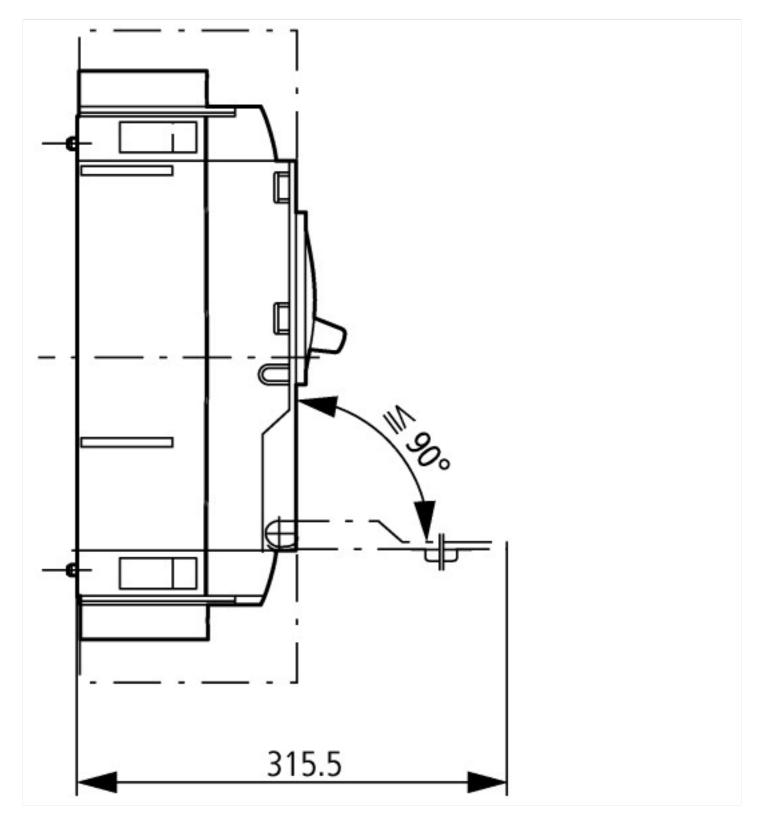

# Additional product information (links)

| Temperature dependency, Derating                      | http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172   |
|---|--|
| CurveSelect characteristics program                   | http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/<br>index.htm |
| additional technical information for NZM power switch | ftp://ftp.moeller.net/DOCUMENTATION/PDF/nzm_technic_de_en.pdf  |