DATASHEET - MSC-D-12-M17(24VDC)



DOL starter, 380 V 400 V 415 V: 5.5 kW, Ir= 8 - 12 A, 24 V DC, DC



Part no. MSC-D-12-M17(24VDC) 101048

Catalog No.

Alternate Catalog

No.

XTSC012B018CTDNL

4315113

EL-Nummer (Norway)

Basic dervice Notes Notes Also suitable for motors with efficiency class IE3. IE3-vealy devices are identified by the logo on their packaging. Noter ratings Motor rating AC3 380 V 400 V 415 V P Ketted operational current AC3 380 V 400 V 415 V Is Retted short-circuit current 380 - 215 V Is Retted short-circuit current 380 - 415 V Is Retted short-circuit current 380 - 415 V Is Retted short-circuit current 380 - 215 V Is Retted short-circuit current 380 - 215 V Is Retted short-circuit current 380 - 215 V Is Retted short-circuit current 380 - 415 V Is Retted short-circuit current 380 - 215 V Is Retted short-circuit current 380 - 215 V Is Retted short-circuit current 380 - 215 V Is Retted short-circuit current 380 - 415 V Is Retted short-circuit current 38	Delivery program			
Notes Connection to SmartWire-DT Motor ratings Motor rating AG3 380 V 400 V 415 V Reted operational current AC3 380 V 400 V 415 V Reted short-circuit current 380 - 415 V Setting range Softing range of overtoad releases Ly A 1.2 Corrients as equence AC5 Corrients as equence AC6 AC6 AC7 AC7 AC8 AC8 AC8 AC8 AC8 AC8	Basic function			DOL starters (complete devices)
Notes Connection to ShartWire-DT Motor ratings Metor rating AC-3 380 V 400 V 15 V Rated operational current AC-2 380 V 400 V 415 V Reted operational current AC-3 380 V 400 V 415 V Reted operational current AC-3 Setting range Setting range Coordination Cordination Contact sequence Actuating voltage Also suitable for motors with efficiency class IE3. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-veady devices are identified by the logo on their packaging. IE3-vead	Basic device			MSC
Connection to SmartWire-DT Motor ratings Motor ratings Motor ratings AC-3 380 V 400 V 415 V P V V 5.5 Rated operational current AC-3 380 V 400 V 415 V I _R A 11.3 Readed short-circuit current 380 - 415 V I _R A 50 Setting range of overload releases Coordination Contact sequence Accurrent Accur				IE3 ✓
Motor ratings Motor rating AC-3 AC-3 ABV 400 V 415 V Rated operational current AC-3 380 V 400 V 415 V Rated short-circuit current 380 - 415 V Setting range Setting range of overload releases Coordination Corract sequence Accurrent Accurrent Accurrent Setting range of overload releases In A Bated short-circuit current 380 - 415 V Accurrent Acc	Notes			Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging.
Motor rating AC-3 380 V 400 V 415 V Reted operational current AC-3 380 V 400 V 415 V Reted short-circuit current 380 - 415 V Setting range Setting range of overload releases Coardination Coardination Contact sequence Actual of the sequence of the	Connection to SmartWire-DT			no
AC-3 380 V 400 V 415 V Rated operational current AC-3 380 V 400 V 415 V Rated short-circuit current 380 - 415 V Setting range Setting range of overload releases Coordination Coordination Contact sequence Actuating voltage Actuating voltage Actuating voltage Setting range of overload releases Ly A So South of the sequence Actuating voltage Actuating voltage P RW 5.5 South Sou	Motor ratings			
Rated operational current AC-3 380 V 400 V 415 V Rated operational current 380 - 415 V Rated operational current 380 V	Motor rating			
Rated operational current AC-3 380 V 400 V 415 V Iq AA Setting range Setting range of overload releases Ir APPER OF Coordination Contact sequence Actuating voltage Actuating voltage Le A 11.3 Type of coordination "1" Type of coordination "2" Type of coordination "2" Type of coordination "2" Actuating voltage Actuating voltage Le A 24 V DC	AC-3			
ACUATION OF A STATE OF	380 V 400 V 415 V	P	kW	5.5
Rated short-circuit current 380 - 415 V Rated short-circuit current 380 - 415 V Setting range Setting range of overload releases Coordination Contact sequence A 11.3 1	Rated operational current			
Rated short-circuit current 380 - 415 V Setting range Setting range of overload releases Ir A 8 - 12 Coordination Contact sequence Actuating voltage Le A 50 A 8 - 12 A 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	AC-3			
Setting range of overload releases Ir A 8 - 12 Coordination Contact sequence Actuating voltage Setting range of overload releases Ir A 8 - 12 Type of coordination "1" Type of coordination "2" Type of coordination "2" A 8 - 12 A 9 8 - 12 A 1 9 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	380 V 400 V 415 V	l _e	Α	11.3
Setting range of overload releases L, A 8-12 Type of coordination "1" Type of coordination "2" Contact sequence Actuating voltage L, A 8-12 Type of coordination "1" Type of coordination "2" Type of coordination "2" A 2 3 4 V DC	Rated short-circuit current 380 - 415 V	I_q	kA	50
Coordination Contact sequence Contact sequence Actuating voltage Type of coordination "1" Type of coordination "2" Type of coordination "2" Type of coordination "2" Type of coordination "2" Type of coordination "1" Type of coordination "2"	Setting range			
Type of coordination "2" Contact sequence M Actuating voltage Type of coordination "2" Actual to the coordination "2" Ac	Setting range of overload releases	I _r	А	8 - 12
Actuating voltage 24 V DC	Coordination			Type of coordination "1" Type of coordination "2"
	Contact sequence			
DC	Actuating voltage			24 V DC
				DC

Motor-protective circuit-breakers PKZM0-12

Contactor DILM17-10(...)

DOL starter wiring set

Mechanical connection element and electrical electric contact module PKZM0-XDM32

Notes

The DOL starter (complete device) consists of a PKZM0 motor protective circuit breaker and a DILM contactor.

With the adapter-less top-hat rail mounting of starters up to 15 A, only the motor protective circuit breaker on the top-hat rail requires an adapter. The contactors are provided with mechanical support via a mechanical connection element.

Control wire guide with max. 6 conductors up to 2.5°mm external diameter or 4 conductors up to 3.5°mm external diameter.

From 16 A, the motor protective circuit breaker and contactor are mounted on the top hat rail adapter plate.

The connection of the main circuit between PKZ and contactor is established with electrical contact modules.

When using the auxiliary contacts DILA-XHIT... (-> 101042) the plug-in electrical connector can be removed without the removal of the front mounting auxiliary contact.

Technical data

General			
Standards			IEC/EN 60947-4-1, VDE 0660
Mounting position			
Ambient temperature			-25 - +55
Main conducting paths			
Rated impulse withstand voltage	U_{imp}	V AC	6000
Overvoltage category/pollution degree			III/3
Rated operational voltage	U _e	٧	230 - 415
Rated operational current			
Open, 3-pole: 50 – 60 Hz			
380 V 400 V	le	Α	12
Additional technical data			
Motor protective circuit breaker PKZM0, PKE			PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/ PKZM0 product group DILM contactors, see contactor product group DILET timing relay, ETR, see contactors, electronic timing relays product group
DILM contactors			
Current heat loss			
Current heat loss at I _e to AC-3/400 V		W	8.1
Power consumption			
DC operated	Sealing	W	0.86
Rating data for approved types			
Auxiliary contacts			
Pilot Duty			
AC operated			A600
DC operated			P300
General Use			
AC		V	600
AC		Α	15
DC		V	250
DC		Α	1

Design verification as per IEC/EN 61439

In	Α	12
P _{vid}	W	2.7
P _{vid}	W	8.1
P_{vs}	W	0.9
P _{diss}	W	0
	°C	-25
	°C	55
	P _{vid} P _{vid} P _{vs}	P _{vid} W P _{vid} W P _{vs} W P _{diss} W °C

10.2.2 Corrosion resistance	Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])

Kind of motor starter		Direct starter
With short-circuit release		Yes
Rated control supply voltage Us at AC 50HZ	V	0 - 0
Rated control supply voltage Us at AC 60HZ	V	0 - 0
Rated control supply voltage Us at DC	V	24 - 24
Voltage type for actuating		DC
Rated operation power at AC-3, 230 V, 3-phase	kW	3
Rated operation power at AC-3, 400 V	kW	5.5
Rated power, 460 V, 60 Hz, 3-phase	kW	0
Rated power, 575 V, 60 Hz, 3-phase	kW	0
Rated operation current le	А	11.3
Rated operation current at AC-3, 400 V	А	12
Overload release current setting	А	8 - 12
Rated conditional short-circuit current, type 1, 480 Y/277 V	А	0
Rated conditional short-circuit current, type 1, 600 Y/347 V	А	0
Rated conditional short-circuit current, type 2, 230 V	А	50000
Rated conditional short-circuit current, type 2, 400 V	А	50000
Number of auxiliary contacts as normally open contact		1
Number of auxiliary contacts as normally closed contact		0
Ambient temperature, upper operating limit	°C	60
Temperature compensated overload protection		Yes
Release class		CLASS 10
Type of electrical connection of main circuit		Screw connection
Type of electrical connection for auxiliary- and control current circuit		Screw connection
Rail mounting possible		Yes
With transformer		No

Number of command positions		0
Suitable for emergency stop		No
Coordination class according to IEC 60947-4-3		Class 2
Number of indicator lights		0
External reset possible		No
With fuse		No
Degree of protection (IP)		IP00
Degree of protection (NEMA)		Other
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		No
Width	mm	45
Height	mm	228
Depth	mm	123.4

Approvals

Product Standards	IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-24
North America Certification	UL listed, CSA certified
Specially designed for North America	No

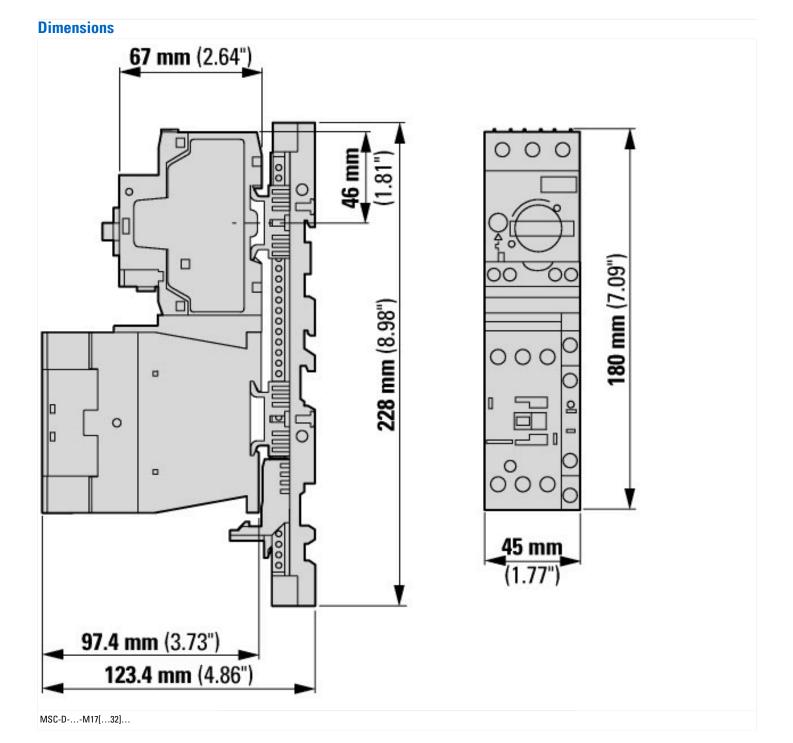

Assets (links)

Declaration of CE Conformity 00003118

Instruction Leaflets

IL03402010Z2018_05

Additional product information (links)

IL03402010Z (AWA1210-2265) Direct-on-line starter up to 32 A		
IL03402010Z (AWA1210-2265) Direct-on-line starter up to 32 A	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402010Z2018_05.pdf	
Motor starters and "Special Purpose Ratings" for the North American market	http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf	
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf	
Moeller_Online Selections Aids	http://www.moeller.net/en/support/slider/index.jsp	