



Reversing starter, 24 V DC, 0,18 - 2,4 A, Push in terminals, SmartWire-DT slave, Controlled stop



Part no. EMS-ROS-T-2,4-SWD
 Catalog No. 170112
 Alternate Catalog No. EMS-ROS-T-2P4-SWD

Delivery program

				This item is only available for a limited time. Replacement item: Art. no. 192386, Type: EMS2-ROS-T-3-SWD
Product range				Electronic motor starter
Product range				SmartWire-DT slave
Subrange				SmartWire-DT electronic motor starters
Basic function				Reversing starters (complete devices)
Function				For connecting to SmartWire-DT for expanded diagnostics.
Description				DOL starting Reversing start Motor protection Circuit design: safety output stage with bypass, three-phase disconnect. Controlled stop via additional enable signal terminal up to SIL3/PlE.
Messages				Operational readiness Operating direction feedback Enable signal Motor current in % Motor current in A Thermal motor image in % Overload prewarning Trip indications (overload, phase failure, etc.) Set short-circuit release value Device Type
Commands				Operating the motor starter Manual reset Automatic reset
Motor ratings				
				Max. rating for three-phase motors, 50 - 60 Hz
				AC-53a
				380 V 400 V 415 V
		P	kW	0.06 - 0.75
		I _r	A _x	0,18 - 2,4
				Setting range of overload releases
				Actuating voltage
				24 V DC
				Connection technique
				Push in terminals
				Stop Function
				Controlled stop
				Connection to SmartWire-DT
				yes

Technical data

General				
Standards				IEC/EN 60947-4-2
Dimensions				
	Width		mm	30
	Height		mm	157
	Depth		mm	124
	Weight		kg	0.3
	Mounting			Top-hat rail IEC/EN 60715, 35 mm
	Protection type (IEC/EN 60529, EN50178, VBG 4)			IP20
	Mounting position			Vertical
	Lifespan, electrical	Operations		3 x 10 ⁷

Max. switching frequency		Operation	3/200 (pulse pause time 50:50)
Terminal capacity		h	
Solid		mm ²	1 x (0.2 - 2.5) 1 x AWG20 - 14
flexible, with ferrule		mm ²	2 x (0.2 - 2,5) 1 x AWG24 - 14
Notes			Minimum length 10 mm.
flexible, with twin ferrule		mm ²	2 x (0,2 - 1,5) 2 x AWG24 - 16
Notes			Minimum length 10 mm.

Climatic environmental conditions

Operating ambient temperature		°C	-5 - +60, in accordance with IEC 60068-2-1
Storage	θ	°C	-40 - +80

Main conducting paths

Rated impulse withstand voltage	U _{imp}	V AC	6000
Overvoltage category/pollution degree			III/2
Rated operational voltage	U _e	V	42 - 550
Rated operational current			
AC-51	I _e	A	0.15 - 2.40
AC-53a	I _e	A	0.15 - 2.4
Heat dissipation	P _V	W	0.1 - 2
Static heat dissipation, non-current-dependent	P _{vs}	W	1
Basic insulation to IEC/EN60947-1			
between feedback signal output and switch voltage		V AC	500
Current measurement			
Setting range of overload releases	I _r	A_x	0,18 - 2,4
Release class		CLASS	10
Recovery time	t _W	min.	2 (manual startup) 20 (automatic restart)
Balance monitoring			
Magnitude I _{max} > I _{rated} ((I _{max} - I _{min})/I _{max})		%	If ≥ 33, pick-up time of 120 s If ≥ 67, pick-up time of 1.8 s
Magnitude I _{max} < I _{rated} ((I _{max} - I _{min})/I _{rated})		%	If ≥ 33, pick-up time of 120 s If ≥ 67, pick-up time of 1.8 s
Stall protection			
Pick-up time I (L1) or I (L3)		A	33
Pick-up time		S	0.5
Short-circuit rating			
Type "1" coordination			
Short-circuit protective device			50 kA, 500 V AC: Fuse 16 A gG/gL 50 kA, 500 V AC: fuse 30 A CCMR 50 kA, 415 V AC: PKM0-4 15 kA, 415 V AC: PKM0-6,3 2.5 kA, 400 V AC: FAZ-B16/3

Control section

Input data			
Supply voltage	U _{AUX}	V DC	24 (-15 - +20 %)
Residual ripple on the input voltage		%	≤ 5
Input current		mA	70
Note on input current			If the +, EN+ / -, EN- inputs are linked
Current draw inrush		mA	120
Current draw (operation)	U _{AUX}	mA	50

Electromagnetic compatibility (EMC)

Electrostatic discharge (ESD)			
applied standard			IEC/EN 61000-4-2, Level 3
Air discharge		kV	8
Contact discharge		kV	6
Electromagnetic fields (RFI)			
applied standard			IEC/EN 61000-4-3

	V/m	800 - 1000 MHz: 10 1.4 - 2 GHz: 10 2.0 - 2.7 GHz: 3
Radio interference suppression		EN 55011, Class A (emitted interference, line-conducted) EN 61000-6-3, Class A (emitted interference, radiated)
Note on use		This product is designed for operation in industrial environments (environment 2). The use in residential environments (environment 1) could cause electrical interference so that addition suppression must be planned.
Burst	kV	2 IEC/EN 61000-4-4, level 3
power pulses (Surge)		1 kV (symmetrical) 2 kV (asymmetrical) according to IEC/EN 61000-4-5
Immunity to line-conducted interference to (IEC/EN 61000-4-6)	V	10

Technical safety parameters:

Notes		Safe switch off. motor protection
Ambient temperature	°C	40
Values according to EN ISO 13849-1		
Performance level	PL	e
Category		3 (Sicheres Abschalten) / 2 (Motorschutz)
Values according to IEC 62061		
		λsd [FIT]: 0 λsu [FIT]: 1321 (Sicheres Abschalten) / 1061 (Motorschutz) λdd [FIT]: 685 (Sicheres Abschalten) / 577 (Motorschutz) λdu [FIT]: 0,1 (Sicheres Abschalten) / 18 (Motorschutz) SFF [%]: 99 (Sicheres Abschalten) / 98 (Motorschutz) DC [%]: 99 (Sicheres Abschalten) / 96 (Motorschutz)
Notes		Safe switch off. motor protection

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	A	2.4
Heat dissipation per pole, current-dependent	P _{vid}	W	0.7
Equipment heat dissipation, current-dependent	P _{vid}	W	2.1
Static heat dissipation, non-current-dependent	P _{vs}	W	1
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-5
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
10.2.2.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.2.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.2.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.

10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])


Kind of motor starter		Reversing starter
With short-circuit release		No
Rated control supply voltage U_s at AC 50HZ	V	0 - 0
Rated control supply voltage U_s at AC 60HZ	V	0 - 0
Rated control supply voltage U_s at DC	V	24 - 24
Voltage type for actuating		DC
Rated operation power at AC-3, 230 V, 3-phase	kW	0.37
Rated operation power at AC-3, 400 V	kW	0.75
Rated power, 460 V, 60 Hz, 3-phase	kW	0.736
Rated power, 575 V, 60 Hz, 3-phase	kW	0
Rated operation current I_e	A	2.4
Rated operation current at AC-3, 400 V	A	2.4
Overload release current setting	A	0.18 - 2.4
Rated conditional short-circuit current, type 1, 480 Y/277 V	A	0
Rated conditional short-circuit current, type 1, 600 Y/347 V	A	0
Rated conditional short-circuit current, type 2, 230 V	A	0
Rated conditional short-circuit current, type 2, 400 V	A	0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as normally closed contact		0
Ambient temperature, upper operating limit	°C	60
Temperature compensated overload protection		Yes
Release class		CLASS 10
Type of electrical connection of main circuit		Spring clamp connection
Type of electrical connection for auxiliary- and control current circuit		Spring clamp connection
Rail mounting possible		Yes
With transformer		No
Number of command positions		0
Suitable for emergency stop		Yes
Coordination class according to IEC 60947-4-3		Class 1
Number of indicator lights		4
External reset possible		Yes
With fuse		No
Degree of protection (IP)		IP20
Degree of protection (NEMA)		Other
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No

Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		Yes
Width	mm	30
Height	mm	157
Depth	mm	139


Approvals

Product Standards		IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14; CE marking
UL File No.		E29096
UL Category Control No.		NLDX, NLDX7
CSA File No.		UL report applies to both US and Canada
North America Certification		UL listed, certified by UL for use in Canada
Specially designed for North America		No

Characteristics

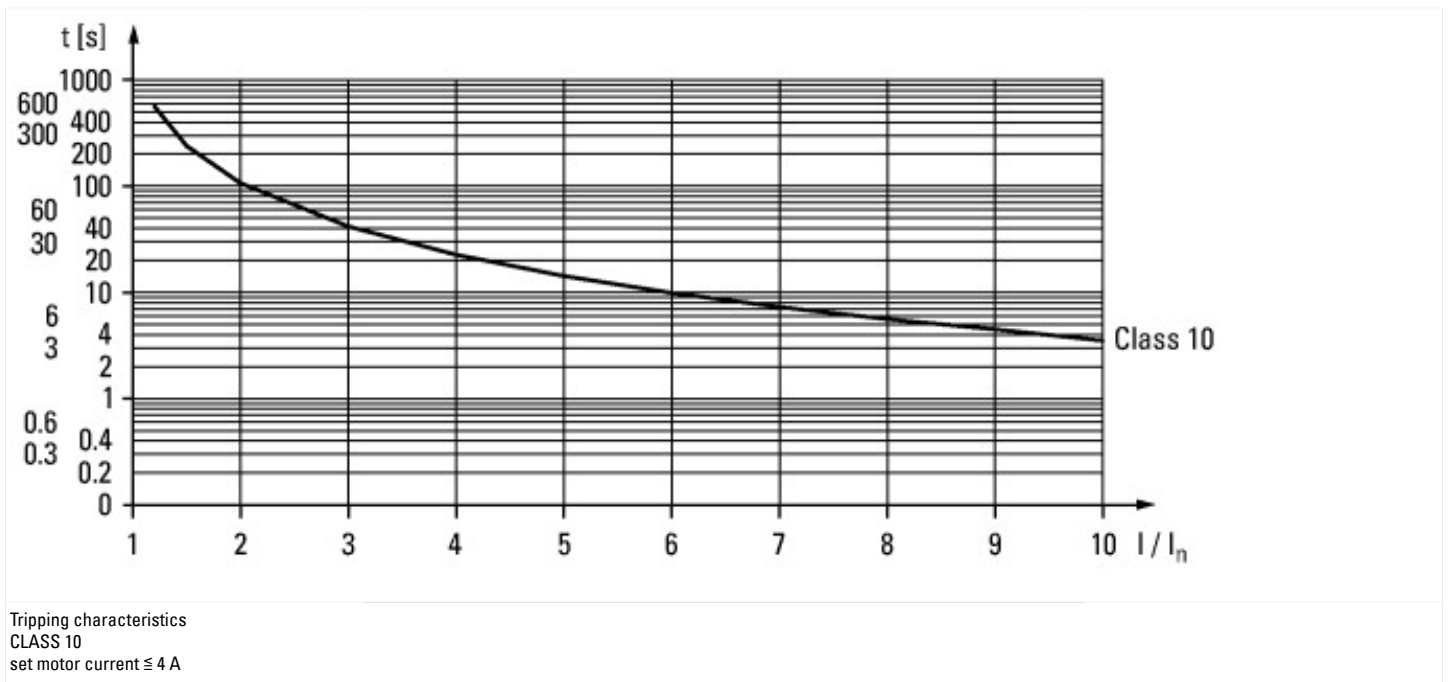

Dimensions

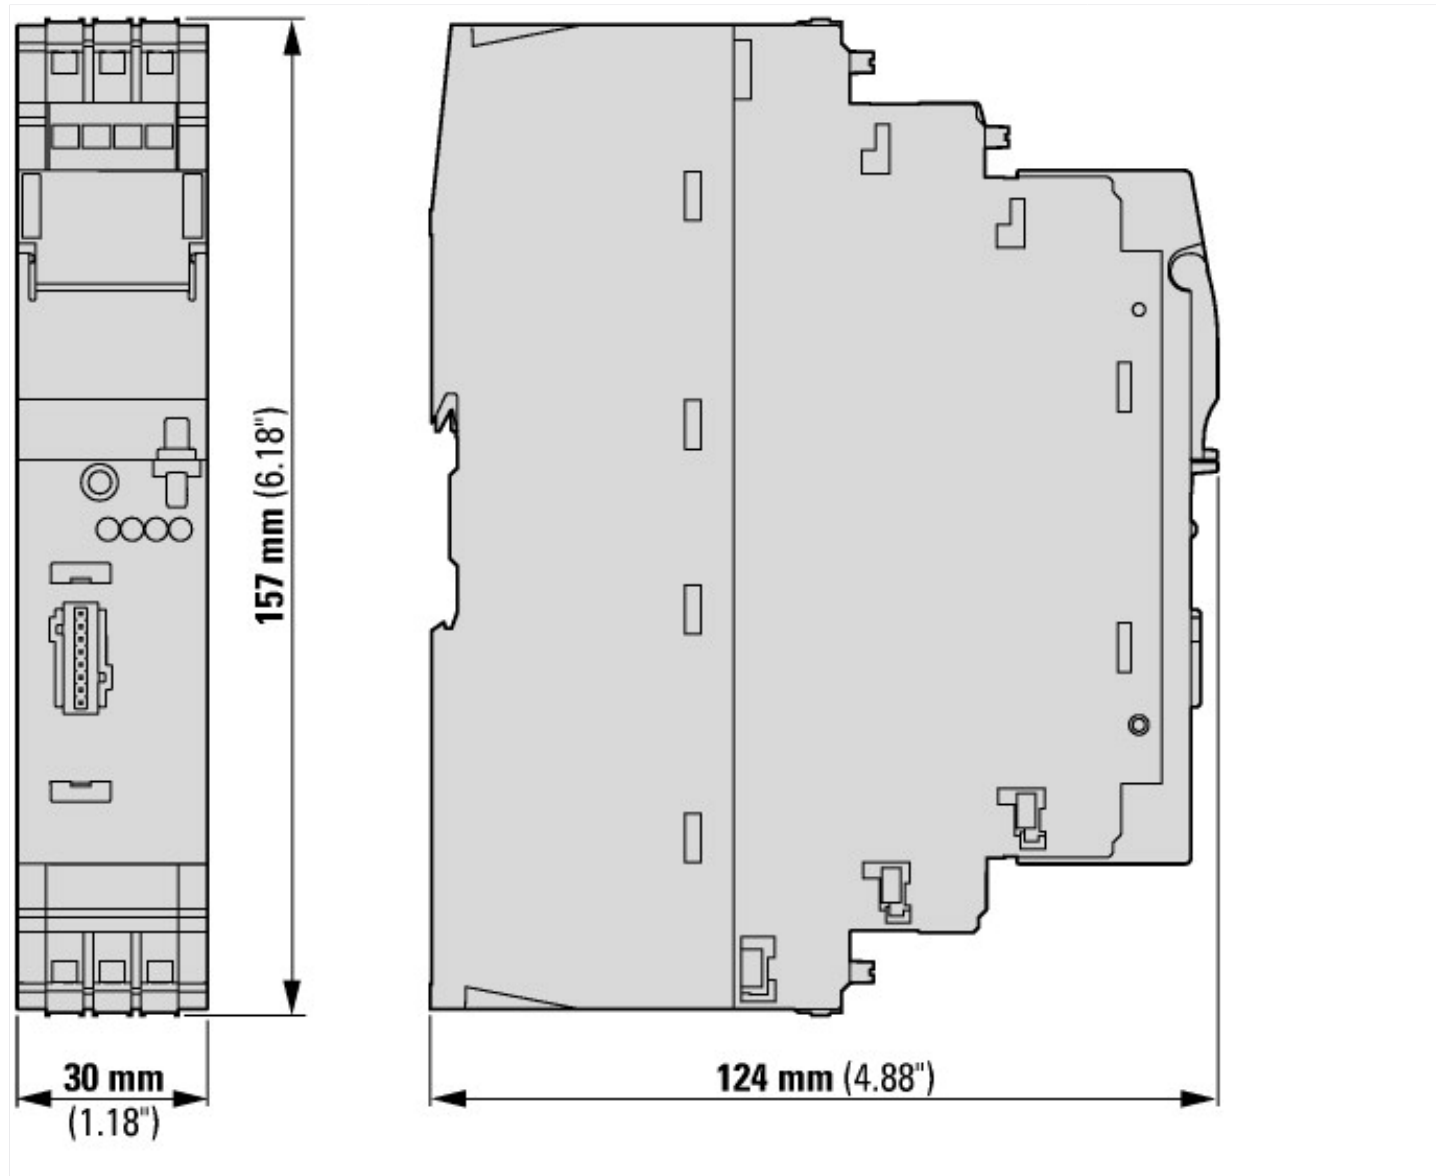

Additional product information (links)

IL120002ZU Electronic motor starter with SWD connection

IL120002ZU Electronic motor starter with SWD connection https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL120002ZU2018_04.pdf

MN034002ZU EMS-...-SWD electronic motor starter/EMS electronic motor starter

MN034002ZU EMS-...-SWD electronic motor starter/EMS electronic motor starter - Deutsch / English https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN034002ZU_DE_EN.pdf

Produktinformation EMS, Hinweise zur Projektierung http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1040938_de.pdf