DATASHEET - NZMN3-A400-S07-DC



DC circuit-breaker, 400ADC, 3p, Ii = 2150ADC, Ue=750VDC, overload protection adjustable

Powering Business Worldwide*

Part no. NZMN3-A400-S07-DC Catalog No. 189599

Similar to illustration

Delivery program

Delivery program			
Product range			Circuit-breaker
Protective function			System and cable protection
Standard/Approval			IEC
Installation type			Fixed
Release system			Thermomagnetic release
Construction size			NZM3
Description			fixed short-circuit releases le
Number of poles			3 pole
Standard equipment			Screw connection
Rated current = rated uninterrupted current			
Rated current = rated uninterrupted current	$I_n = I_u$	Α	400
Setting range			
Overload trip			
中	I _r	А	320 - 400
Short-circuit releases			
Non-delayed	$I_i = I_n x \dots$		fixed 2150 A DC
Short-circuit releases	I _{rm}	A	2150 - 2150

Technical data

General

	IEC/EN 60947
	Finger and back-of-hand proof to VDE 0106 part 100
	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
°C	- 40 - + 70
°C	-25 - +70
g	20 (half-sinusoidal shock 20 ms)
V AC	500
V AC	300
	as required
	In the operating controls area: IP20 (basic degree of protection)
	With insulating surround: IP40 With door coupling rotary handle: IP66
	°C g V AC

Terminations			Tunnel terminal: IP10 Phase isolator and strip terminal: IP00
Other technical data (sheet catalogue)			Temperature dependency, Derating
Circuit-breakers			- P
Rated current = rated uninterrupted current	$I_n = I_u$	Α	400
Rated surge voltage invariability	U _{imp}		
Main contacts		V	8000
Auxiliary contacts		V	6000
Rated operational voltage	U _e	V DC	750
Overvoltage category/pollution degree			III/3
Rated insulation voltage	Ui	V DC	750
Switching capacity			
Rated short-circuit making capacity	I _{cm}		
750 V DC	I _{cm}	kA	30
Rated short-circuit breaking capacity I _{cn}	I _{cn}		
Icu to IEC/EN 60947 test cycle 0-t-C0	lcu	kA	
500 V DC	I _{cu}	kA	30
750 V DC	I _{cu}	kA	30
Ics to IEC/EN 60947 test cycle 0-t-C0-t-C0	Ics	kA	
500 V DC	I _{cs}	kA	30
750 V DC	I _{cs}	kA	30
			Maximum back-up fuse, if the expected short-circuit currents at the installation
			location exceed the switching capacity of the circuit-breaker.
Rated short-time withstand current			
t = 0.3 s	I _{cw}	kA	1.7
t = 1 s	I _{cw}	kA	1.7
Utilization category to IEC/EN 60947-2			A
Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release)	Operations		15000
Lifespan, electrical		- "	
Max. operating frequency		Ops/h	60
Total break time at short-circuit Terminal capacity		ms	<10
Standard equipment			Screw connection
Optional accessories			Box terminal
			Tunnel terminal connection on rear
Round copper conductor			
Box terminal			
Solid		mm ²	2 x 16
Stranded		mm ²	1 x (35 - 240)
Standed		mm ⁻	2 x (25-120)
Tunnel terminal			
Solid		mm ²	1 x 16
Stranded			
1-hole		mm ²	1 x (16 - 185)
Bolt terminal and rear-side connection			
Direct on the switch			
Solid		mm ²	1 x 16 2 x 16
Stranded		mm ²	1 x (25 - 240) 2 x (25 - 240)
Connection width extension		mm^2	
Connection width extension		mm ²	2 x 300
Al circular conductor			
Tunnel terminal			
Solid		mm ²	1 x 16
Stranded			
Stranded			

Stranded		mm ²	1 x (25 - 185) ²⁾
Double hole		mm ²	1 x (50 - 240) 2 x (50 - 240)
			$^{\rm 2)}$ Up to 240 ${\rm mm^2}$ can be connected depending on the cable manufacturer.
Cu strip (number of segments x width x segment thickness)			
Box terminal			
	min.	mm	6 x 16 x 0.8
	max.	mm	10 x 24 x 1.0 + 5 x 24 x 1.0 (2 x) 8 x 24 x 1.0
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	6 x 16 x 0.8
Flat copper strip, with holes	max.	mm	10 x 32 x 1.0 + 5 x 32 x 1.0
Connection width extension		mm	(2 x) 10 x 50 x 1.0
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M10
Direct on the switch			
	min.	mm	20 x 5
	max.	mm	30 x 10 + 30 x 5
Connection width extension		mm	
Connection width extension	max.	mm	2 x (10 x 50)
Control cables			
		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)

Design verification as per IEC/EN 61439

Design vernication as per 126/214 01455			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	400
Equipment heat dissipation, current-dependent	P_{vid}	W	73
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
$10.2.3.3\mbox{Verification}$ of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 7.0

Low-voltage industrial components	, /EC000017\ / Bower aircuit bro	alvor for trafa/ganaratar/inatallati	on protoction (EC000220)
LOW-VOILAGE INGUSTRAL COMBONIERS	S (EGUUUU I/I/ FOWEI GIIGUIL-DIE	akei ioi iraio/uenerator/instanati	JII DI OLECTION (EGUUUZZO)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.01-27-37-04-09 [A.17716013])

Rated voltage Rated short-circuit breaking capacity Icu at 400 V, 50 Hz Overload release current setting A 320 - 320 Adjustment range short-term delayed short-circuit release A 0 - 0 Adjustment range undelayed short-circuit release A 2 150 - 2150 Alignstment range undelayed short-circuit release A 2 150 - 2150 No Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact With switched-off indicator With switched-off indicator With under voltage release No	protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013])		
Rated short-circuit breaking capacity lcu at 400 V, 50 Hz Overload release current setting A 320 - 320 Adjustment range short-term delayed short-circuit release A 0 - 0 Adjustment range undelayed short-circuit release A 2 150 - 2150 Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact With switched-off indicator With switched-off indicator With under voltage release No	Rated permanent current lu	Α	400
Overload release current setting Adjustment range short-term delayed short-circuit release Adjustment range undelayed short-circuit release Built-in device fixed built-in technique No Adjustment fange to ensert fixed built-in technique Adjustment fange fixed built	Rated voltage	V	48 - 750
Adjustment range short-term delayed short-circuit release ADJustment range undelayed short-circuit release ADJustment range undelayed short-circuit release ADJUSTMENT RANGE ADJ	Rated short-circuit breaking capacity Icu at 400 V, 50 Hz	kA	0
Adjustment range undelayed short-circuit release A 2150 - 2150 Integrated earth fault protection Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Nith switched-off indicator Nith under voltage release No	Overload release current setting	Α	320 - 320
Integrated earth fault protection Type of electrical connection of main circuit Device construction Built-in device fixed built-in technique No Built-in device fixed built-in technique No No Integrated earth fault protection of main circuit Device construction Built-in device fixed built-in technique No No No Integrated earth fault protection of main circuit No Integrated earth fault protection of main circuit No Integrated earth fault protection of main circuit No Integrated earth fault protection of main current circuit Front side Rocker lever Motor drive integrated No Motor drive optional	Adjustment range short-term delayed short-circuit release	Α	0 - 0
Type of electrical connection of main circuit Device construction Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional No No Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact No With switched-off indicator No With under voltage release No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated No Motor drive optional Screw connection Built-in device fixed built-in technique No No Ro Rocker lever No No Yes	Adjustment range undelayed short-circuit release	Α	2150 - 2150
Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact No With switched-off indicator No With under voltage release No No No No No No No No No N	Integrated earth fault protection		No
Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact O Number of auxiliary contacts as normally open contact O Number of auxiliary contacts as normally open contact O Number of auxiliary contacts as change-over contact O Number of auxiliary contacts as change-over contact O No With switched-off indicator No With under voltage release No No Number of poles So Verition of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated No Motor drive optional No	Type of electrical connection of main circuit		Screw connection
DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact No With switched-off indicator With under voltage release No Number of poles 3 Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated No Motor drive optional	Device construction		Built-in device fixed built-in technique
Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact No With switched-off indicator No With under voltage release No No Number of poles 3 Position of connection for main current circuit Front side Type of control element Complete device with protection unit Yes Motor drive integrated No Motor drive optional No No No No No No No No No N	Suitable for DIN rail (top hat rail) mounting		No
Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact No With switched-off indicator With under voltage release No Number of poles Saron side Type of control element Complete device with protection unit Motor drive integrated Motor drive optional O O No	DIN rail (top hat rail) mounting optional		No
Number of auxiliary contacts as change-over contact With switched-off indicator No With under voltage release No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional O Rocker lever Yes No Yes	Number of auxiliary contacts as normally closed contact		0
With switched-off indicator With under voltage release No Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional No No No No No No Yes	Number of auxiliary contacts as normally open contact		0
With under voltage release No Number of poles 3 Position of connection for main current circuit Type of control element Complete device with protection unit Wotor drive optional No	Number of auxiliary contacts as change-over contact		0
Number of poles Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive integrated Motor drive optional Salaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa	With switched-off indicator		No
Position of connection for main current circuit Type of control element Complete device with protection unit Motor drive optional Front side Rocker lever Yes No Yes	With under voltage release		No
Type of control element Complete device with protection unit Motor drive optional Rocker lever Yes No Yes	Number of poles		3
Complete device with protection unit Yes Motor drive integrated No Motor drive optional Yes	Position of connection for main current circuit		Front side
Motor drive integrated No Motor drive optional Yes	Type of control element		Rocker lever
Motor drive optional Yes	Complete device with protection unit		Yes
	Motor drive integrated		No
Degree of protection (IP) Other	Motor drive optional		Yes
	Degree of protection (IP)		Other

Characteristics

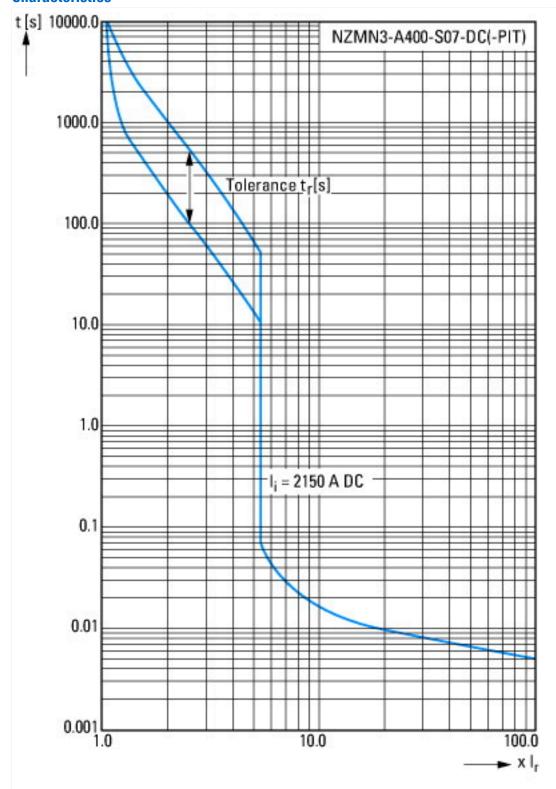

Let-through current

Let-through energy

Additional product information (links)

11 012002711	nc	circuit-breaker
1101203220	υu	Circuit-breaker

IL012092ZU DC circuit-breaker	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL012092ZU2017_02.pdf
Temperature dependency, Derating	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172
additional technical information for NZM power switch	https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf