### **DATASHEET - NZMS3-4-PX630/VAR**



NZM3 PXR25 circuit breaker - integrated energy measurement class 1, 630A, 4p, variable, Screw terminal



Part no. NZMS3-4-PX630/VAR Catalog No. 192282

Similar to illustration

**Delivery program** 

Product range	Circuit-breaker
Protective function	Systems, cable, selectivity and generator protection
Standard/Approval	IEC
Installation type	Fixed
Release system	Electronic release
Construction size	NZM3
Description	LSI overload protection and delayed and non-delayed short-circuit protective

Class 1 energy measurement, r.m.s. value measurement, and "thermal memory"
USB interface for configuration and test function with Power Xpert Protection
Manager software

Interface module in equipment supplied.
Optionally communication-capable with internal Modbus RTU module or CAM

Number of poles 4 pole
Standard equipment Screw connection

Switching capacity
400/415 V 50 Hz Icu kA 70

Rated current = rated uninterrupted current

Rated current = rated uninterrupted current  $I_n = I_u$  A 630 Neutral conductor % of phase % 0 - 60 - 100

Neutral conductor

% of phase % U - 60 - 100
conductor

Setting range

Short-circuit releases

Non-delayed  $I_i = I_n \ x \ \dots \ 2-8$ 

Delayed  $I_{sd} = I_r \times ...$  1.5 – 7

# **Technical data**

General			
Standards			IEC/EN 60947
Protection against direct contact			Finger and back of hand proof to VDE 0106 Part 100
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Ambient temperature, storage	•	°C	- 40 - + 70
Operation	•	°C	-25 - +70
Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27	9	g	20 (half-sinusoidal shock 20 ms)
Safe isolation to EN 61140			

Between auxiliary contacts and main contacts		V AC	500	
between the auxiliary contacts		V AC	300	
Mounting position			Vertical and 90° in all directions	With XFI earth-fault release: - NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit - NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit: - NZM3, N3: vertical, 90° right/left - NZM4, N4: vertical with remote operator: - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions
Direction of incoming supply			as required	
Degree of protection				
Device			In the operating controls area: IP2	O (basic degree of protection)
Enclosures			With insulating surround: IP40	
Terminations			With door coupling rotary handle: Tunnel terminal: IP10 Phase isolator and strip terminal: I	
Other technical data (sheet catalogue)			Temperature dependency, Deratin	g
Circuit-breakers				
Rated current = rated uninterrupted current	$I_n = I_u$	Α	630	
Rated surge voltage invariability	$U_{imp}$			
Main contacts		V	8000	
Auxiliary contacts		V	6000	
Rated operational voltage	U <sub>e</sub>	V AC	690	
Overvoltage category/pollution degree			III/3	
Rated insulation voltage	Ui	V	690	
Use in unearthed supply systems		V	≦ 690	
Switching capacity				
Rated short-circuit making capacity	I <sub>cm</sub>			
240 V	I <sub>cm</sub>	kA	220	
400/415 V	I <sub>cm</sub>	kA	154	
440 V 50/60 Hz	I <sub>cm</sub>	kA	143	
525 V 50/60 Hz	I <sub>cm</sub>	kA	80	
690 V 50/60 H	Ic	kA	50	
Rated short-circuit breaking capacity I <sub>cn</sub>	I <sub>cn</sub>			
Icu to IEC/EN 60947 test cycle 0-t-C0	lcu	kA		
240 V 50/60 Hz	I <sub>cu</sub>	kA	100	
400/415 V 50/60 Hz	I <sub>cu</sub>	kA	70	
440 V 50/60 Hz	I <sub>cu</sub>	kA	65	
525 V 50/60 Hz	I <sub>cu</sub>	kA	36	
690 V 50/60 Hz	I <sub>cu</sub>	kA	25	
Ics to IEC/EN 60947 test cycle 0-t-C0-t-C0	Ics	kA		
240 V 50/60 Hz	I <sub>cs</sub>	kA	100	
400/415 V 50/60 Hz	I <sub>cs</sub>	kA	70	
440 V 50/60 Hz	I <sub>cs</sub>	kA	65	
525 V 50/60 Hz	I <sub>cs</sub>	kA	18	
690 V 50/60 Hz	I <sub>cs</sub>	kA	6	
Rated short-time withstand current			Maximum back-up fuse, if the exp location exceed the switching cap	ected short-circuit currents at the installation acity of the circuit-breaker.
t = 0.3 s	I <sub>cw</sub>	kA	3.3	
t=1s	I <sub>cw</sub>	kA	3.3	
Utilization category to IEC/EN 60947-2	·cw		Α	

Lifespan, electrical			
AC-1			
400 V 50/60 Hz	Operations		5000
415 V 50/60 Hz	Operations		5000
690 V 50/60 Hz	Operations		3000
Max. operating frequency	орогиноно	Ops/h	60
Total break time at short-circuit		ms	< 10
Terminal capacity		IIIO	
Standard equipment			Screw connection
Optional accessories			Box terminal Tunnel terminal connection on rear
Round copper conductor			
Box terminal			
Solid		mm <sup>2</sup>	2 x 16
Stranded		mm <sup>2</sup>	1 x (35 - 240) 2 x (25-120)
Tunnel terminal			
Solid		mm <sup>2</sup>	1 x 16
Stranded			
1-hole		$\mathrm{mm}^2$	1 x (16 - 185)
Bolt terminal and rear-side connection			
Direct on the switch			
Solid		mm <sup>2</sup>	1 x 16 2 x 16
Stranded		$\mathrm{mm}^2$	1 x (25 - 240) 2 x (25 - 240)
Connection width extension		mm <sup>2</sup>	2 X (23 - 240)
Connection width extension		$\text{mm}^2$	2 x 300
Al circular conductor			
Tunnel terminal			
Solid		mm <sup>2</sup>	1 x 16
Stranded			
Stranded		mm <sup>2</sup>	1 x (25 - 185) <sup>2)</sup>
Double hole		mm <sup>2</sup>	1 x (50 - 240) 2 x (50 - 240)
			<sup>2)</sup> Up to 240 mm² can be connected depending on the cable manufacturer.
Cu strip (number of segments x width x segment thickness)			
Box terminal			
	min.	mm	6 x 16 x 0.8
	max.	mm	10 x 24 x 1.0 + 5 x 24 x 1.0 (2 x) 8 x 24 x 1.0
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	6 x 16 x 0.8
Flat copper strip, with holes	max.	mm	10 x 32 x 1.0 + 5 x 32 x 1.0
Connection width extension		mm	(2 x) 10 x 50 x 1.0
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M10
Direct on the switch			
	min.	mm	20 x 5
	max.	mm	30 x 10 + 30 x 5
Connection width extension		mm	2 (12 22)
Connection width extension  Control cables	max.	mm	2 x (10 x 50)
		mm <sup>2</sup>	1 x (0.75 - 2.5)

## Design verification as per IEC/EN 61439

besign vermoution as per 120/211 01-103			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	630
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	119.07
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
$10.2.3.3  \text{Verification of resistance of insulating materials to abnormal heat} \\ \text{and fire due to internal electric effects}$			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

### **Technical data ETIM 7.0**


Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (eci@ss10.0.1-27-37-04-09 [AJZ716013])


protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013])		
Rated permanent current lu	А	630
Rated voltage	V	690 - 690
Rated short-circuit breaking capacity Icu at 400 V, 50 Hz	kA	70
Overload release current setting	Α	252 - 630
Adjustment range short-term delayed short-circuit release	А	1.5 - 7
Adjustment range undelayed short-circuit release	А	2 - 8
Integrated earth fault protection		No
Type of electrical connection of main circuit		Screw connection
Device construction		Built-in device fixed built-in technique
Suitable for DIN rail (top hat rail) mounting		No
DIN rail (top hat rail) mounting optional		No
Number of auxiliary contacts as normally closed contact		0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as change-over contact		0
With switched-off indicator		No
With under voltage release		No

Number of poles	4
Position of connection for main current circuit	Front side
Type of control element	Rocker lever
Complete device with protection unit	Yes
Motor drive integrated	No
Motor drive optional	Yes
Degree of protection (IP)	IP20


### **Characteristics**

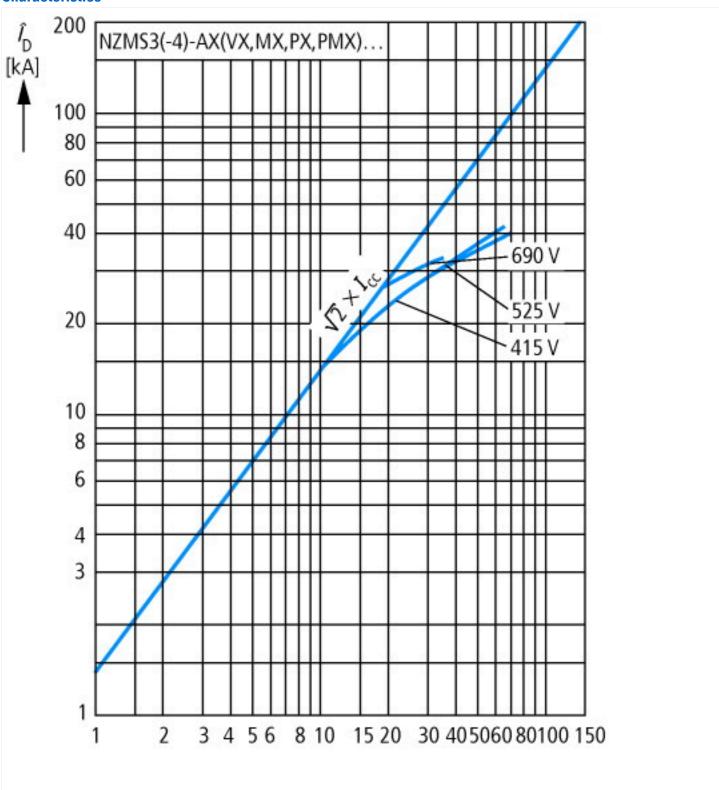


Let-through current

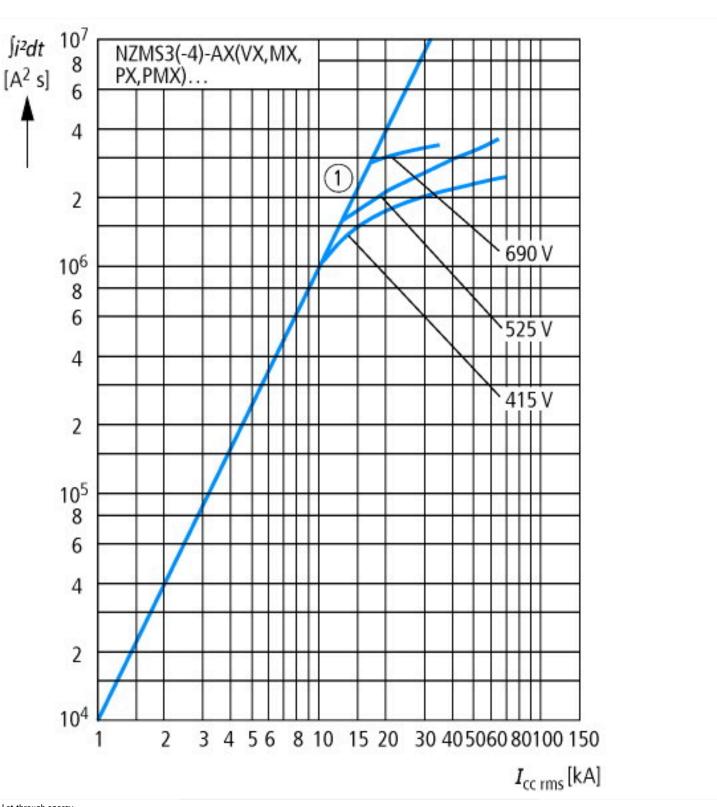

# **Dimensions**

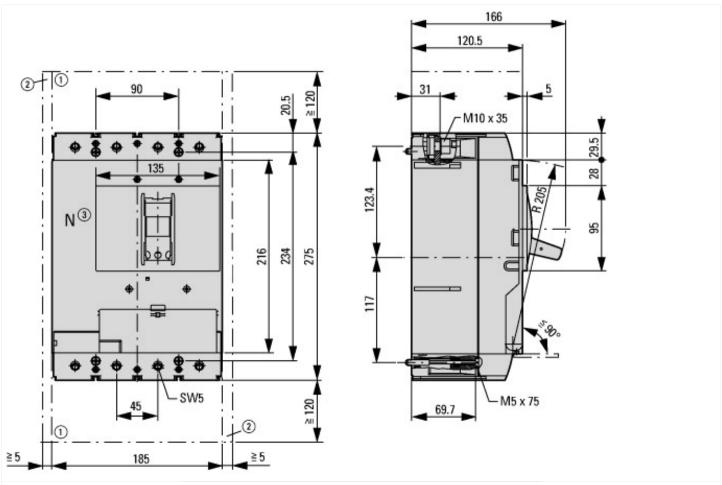

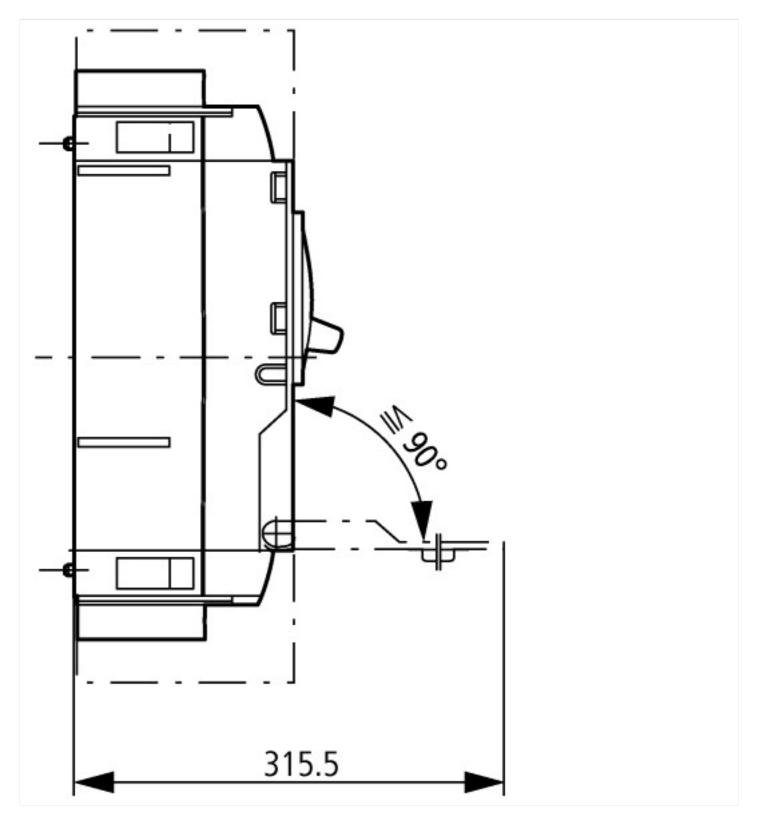

#### Additional product information (links)

Additional product information (links)		
IL012100ZU NZM3-PXR circuit-breaker, basic device , NZM3-PXR Circuit-Breaker, basic unit		
IL012100ZU NZM3-PXR circuit-breaker, basic device , NZM3-PXR Circuit-Breaker, basic unit	https://es-assets.eaton.com/D0CUMENTATION/AWA_INSTRUCTIONS/IL012100ZU2020_10.pdf	
Temperature dependency, Derating	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172	
additional technical information for NZM power switch	https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf	