




Electric Automation
Automation specialists

Reference: OTR
Code: 1SCA022613R2940

OTR25A3M Safety switch

Buy it at Electric Automation Network

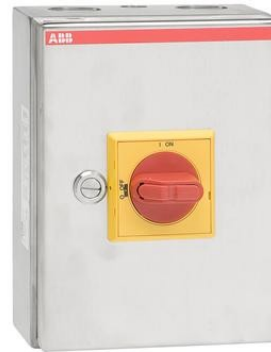

Safety switch 3-p.400V AC23A 15kW AC22A 16A Stainless enclosure IP65 Yellow-red Selector handle

Ordering

EAN:	6417019199733
Minimum Order Quantity:	1 piece
Customs Tariff Number:	85365080

Dimensions

Product Net Width:	150 mm
Product Net Height:	200 mm
Product Net Depth:	100 mm
Product Net Weight:	1.9 kg

Container Information

Package Level 1 Units:	1 piece
Package Level 1 Width:	152 mm
Package Level 1 Height:	138 mm
Package Level 1 Length:	203 mm
Package Level 1 Gross Weight:	2 kg

Package Level 1 EAN:	6417019199733
----------------------	---------------

Environmental

RoHS Status:	Planned to follow EU Directive 2002/95/EC August 18, 2005 and amendment after 2009 Q4
--------------	---

Additional Information

Cable Entry Position:	Top and bottom
Cable Outlets Per Side:	2xDia32.5+Dia16.5
Conventional Thermal Current (I_{the}):	Fully Enclosed 50 A
Degree of Protection:	acc. to IEC 60529 IP65
Dimensions:	150 mm x 200 mm x 100 mm
Enclosure Material:	Stainless steel sheet
IIT Publishing Status:	Level 0 - Information enabled
Number of Auxiliary Contacts NO:	1
Number of Poles:	3
Order Multiple:	1 piece
Pollution Degree:	3
Position of Line Terminals:	Top In - Bottom Out
Position of PE Terminals:	Top In - Bottom Out
Product Main Type:	OT25
Product Name:	Safety switch
Rated Operational Current AC-22A (I_e):	(500 V) 63 A (690 V) 63 A
Rated Operational Current AC-23A (I_e):	(380 ... 415 V) 30 A (500 V) 30 A (690 V) 20 A
Rated Operational Power AC-23A (P_e):	(220 ... 240 V) 7,5 kW (400 V) 15 kW (500 V) 15 kW (690 V) 15 kW
Rated Operational Voltage:	750 V

Certificates and Declarations (Document Number)

Data Sheet, Technical Information:	1SCC340006C0201
Declaration of Conformity - CE:	1SCC340006D0201
RoHS Information:	1SCC340034D0201

Classifications

ETIM 5:	EC000249 - Protection switch disconnecter housing
Object Classification Code:	Q