




**Electric Automation**  
Automation specialists

Reference: OT2500E04P  
Code: 1SCA105140R1001

OT2500E04P switch-disconnector

Buy it at [Electric Automation Network](#)

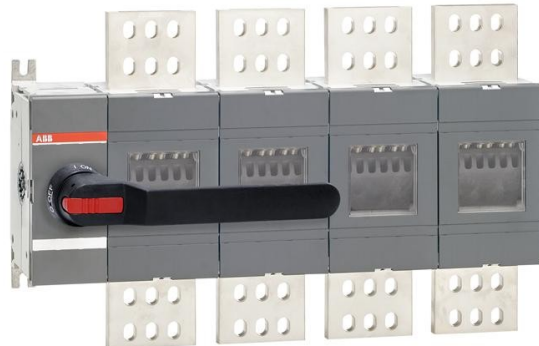

Including terminal bolt kit, a black ON-OFF plastic handle OHB200J12P and shaft OXP12x280 as standard. The handle is IP65 protected, padlockable in the OFF-position and with door interlock in the ON-position. The shaft is adjustable for a range of installation depths.

### Ordering

EAN:	6417019392493
Minimum Order Quantity:	1 piece
Customs Tariff Number:	85365080

### Dimensions

Product Net Width:	599 mm
Product Net Height:	377 mm
Product Net Depth:	146 mm
Product Net Weight:	49.0 kg

### Container Information

Package Level 1 Units:	1 piece
Package Level 1 Width:	580 mm
Package Level 1 Height:	500 mm
Package Level 1 Length:	780 mm
Package Level 1 Gross Weight:	49.0 kg
Package Level 1 EAN:	6417019392493

## Environmental

RoHS Status:	Planned to follow EU Directive 2002/95/EC August 18, 2005 and amendment after 2006-06-01
--------------	------------------------------------------------------------------------------------------

## Additional Information

Conventional Free-air Thermal Current ( $I_{th}$ ):	q = 40 °C 2500 A
Earthing Switch Type:	No Additional Type
Handle Type:	Pistol
IIT Publishing Status:	Level 0 - Information enabled
Includes:	Handle and Shaft
Mounting Type:	Normal
Number of Poles:	4
Operating Mechanism:	Mechanism at the end of the switch
Operating Mode:	Front Operated
Pollution Degree:	3
Position of Line Terminals:	Top In - Bottom Out
Power Loss:	at Rated Operating Conditions per Pole 85.0 W
Product Main Type:	OT2500
Product Name:	Switch-disconnector
Rated Impulse Withstand Voltage ( $U_{imp}$ ):	12 kV
Rated Insulation Voltage ( $U_i$ ):	1000 V
Rated Operational Current AC-21A ( $I_e$ ):	(380 ... 415 V) 2500 A
Rated Operational Current AC-22A ( $I_e$ ):	(380 ... 415 V) 2500 A
Rated Operational Voltage:	1000 V
Rated Short-time Withstand Current ( $I_{cw}$ ):	for 1 s 55 kiloampere rms
Special Functions:	No
Standards:	IEC
Suitable for Product Class:	Switch-disconnector
Terminal Type:	Lug terminals
Terminal Width:	100 mm

## Certificates and Declarations (Document Number)

Data Sheet, Technical Information:	1SCC301020C0201
Declaration of Conformity - CE:	1SCC301176D0201
RoHS Information:	1SCC301149D0202

## Classifications

ETIM 5:	EC000216 - Switch disconnecter
Object Classification Code:	Q