






## Circuit-breaker 4p, 630A, fixed

Part no. **IZMX16B4-U06F**  
 Article no. **123476**

### Delivery programme

|  |                             |    |  |
|--|-----------------------------|----|--|
| Product range  |                             |    | Air circuit-breakers/switch-disconnectors  |
| Product range  |                             |    | Open circuit-breakers  |
| Current Range  |                             |    | Up to 4000 A   |
| Protective function  |                             |    | Universal protection   |
| Installation type  |                             |    | Fixed  |
| Construction size  |                             |    | IZMX16   |
| Release system   |                             |    | Electronic release   |
| Standard/Approval  |                             |    | IEC  |
| Number of poles  |                             |    | 4 pole   |
| Degree of Protection   |                             |    | IP20, IP55 with protective cover, IP41 door sealing frame  |
|  |                             |    | suitable for zone selectivity<br>suitable for communication<br>integrated system monitor and 4-character display<br>optionally fittable by user with comprehensive accessories |
| Rated current = rated uninterrupted current  | $I_n = I_u$                 | A  | 630  |
| Breaking capacity $I_{cu} = I_{cs}$ to 440 V 50/60 Hz                              | $I_{cu}$                    | kA | 42   |
| Breaking capacity $I_{cs}$ to 440 V 50/60 Hz                                       | $I_{cs}$                    | kA | 42   |
| Overload release, min.   | $I_r$                       | A  | 315  |
| Overload release, max.   | $I_r$                       | A  | 630  |
| Non-delayed  | $I_j = I_n \times \dots$    |    | 2 - 12, OFF  |
| Delayed  | $I_{sd} = I_r \times \dots$ |    | 2 - 10   |
|  |                             |    |  |
|  |                             |    |  |
| <b>Notes</b>   |                             |    |  |
| Main terminals not included, need to be ordered separately.                        |                             |    |  |

### Technical data
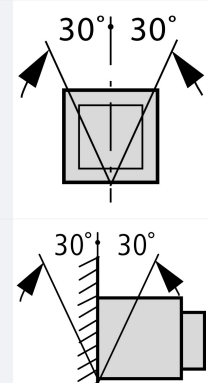
|   |             |    |  |
|---|-------------|----|--|
| <b>General</b>                              |             |    |  |
| Standards                                   |             |    | IEC/EN 60947   |
| Ambient temperature                         |             |    |  |
| Storage                                     | θ           | °C | -25 - +70 (device with LCD-display -20 - +70)  |
| Operating (open)                            |             | °C | -25 - +70 (device with LCD-display -20 - +70)  |
| Mounting position                           |             |    |  |
| Utilization category                        |             |    | B  |
| Degree of Protection                        |             |    | IP20, IP55 with protective cover, IP41 door sealing frame                            |
| Direction of incoming supply                |             |    | as required  |
| <b>Main conducting paths</b>                |             |    |  |
| Rated current = rated uninterrupted current | $I_n = I_u$ | A  | 630  |

|   |           |      |       |
|---|-----------|------|-------|
| Rated uninterrupted current at 50 °C                  | $I_u$     | A    | 630   |
| Rated uninterrupted current at 60 °C                  | $I_u$     | A    | 630   |
| Rated uninterrupted current at 70 °C                  | $I_u$     | A    | 630   |
| Rated impulse withstand voltage                       | $U_{imp}$ | V AC | 12000 |
| Rated operational voltage                             | $U_e$     | V AC | 690   |
| Use in IT electrical power networks up to $U = 440$ V | $I_{IT}$  | kA   | 23    |
| Overvoltage category/pollution degree                 |           |      | III/3 |
| Rated insulation voltage                              | $U_i$     | V    | 1000  |

### Switching capacity

|   |                           |    |       |
|---|---------------------------|----|-------|
| Rated short-circuit making capacity   | $I_{cm}$                  |    |       |
| up to 440 V 50/60 Hz  | $I_{cm}$                  | kA | 88    |
| up to 690 V 50/60 Hz  | $I_{cm}$                  | kA | 88    |
| Rated short-time withstand current 50/60 Hz   |                           |    |       |
| $t = 1$ s   | $I_{cw}$                  | kA | 42    |
| Rated short-circuit breaking capacity $I_{cn}$  | $I_{cn}$                  |    |       |
| IEC/EN 60947 operating sequence $I_{cu}$ 0-t-CO   |                           |    |       |
| up to 240 V 50/60 Hz  | $I_{cu}$                  | kA | 42    |
| up to 440 V 50/60 Hz  | $I_{cu}$                  | kA | 42    |
| up to 690 V 50/60 Hz  | $I_{cu}$                  | kA | 42    |
| IEC/EN 60947 operating sequence $I_{cs}$ 0-t-CO-t-CO                                    |                           |    |       |
| up to 240 V 50/60 Hz  | $I_{cs}$                  | kA | 42    |
| up to 440 V 50/60 Hz  | $I_{cs}$                  | kA | 42    |
| up to 690 V 50/60 Hz  | $I_{cs}$                  | kA | 42    |
| Operating times   |                           |    |       |
| Closing delay via spring release  |                           | ms | 30    |
| Total opening delay via shunt release   |                           | ms | 25    |
| Total opening delay via undervoltage release  |                           | ms | 50    |
|   |                           |    |       |
| Total opening delay on non-delayed short-circuit release (up to complete arc quenching) |                           | ms | 25    |
| Lifespan  |                           | S  |       |
| Lifespan, mechanical  | Switching cycles (ON/OFF) |    | 12500 |
| Lifespan, mechanical with maintenance   | Switching cycles (ON/OFF) |    | 20000 |
| Lifespan, electrical  | Switching cycles (ON/OFF) |    | 10000 |
| Lifespan, electrical with maintenance   | Switching cycles (ON/OFF) |    | 10000 |
| Maximum operating frequency   | Operations/h              |    | 60    |
| Heat dissipation at rated current $I_n$   |                           |    |       |
| Fixed mounting  |                           | W  | 36    |

### Weight

|                |  |    |    |
|----------------|--|----|----|
| Fixed mounting |  |    |    |
| 3-pole         |  | kg | 19 |
| 4-pole         |  | kg | 24 |

### Terminal capacities

|                    |  |    |  |
|--------------------|--|----|--|
| Copper bar         |  |    |  |
| Fixed mounting     |  |    |  |
| Black              |  | mm | 2 x 5 x 50   |
| Withdrawable units |  |    |  |
| Black              |  | mm | 2 x 5 x 50   |
|                    |  |    | These are values used in separate switchgear. The actual values will depend on the temperature around the circuit-breaker, which is influenced by the ambient temperature, the degree of protection (IP), the mounting height, the partitions, and |

any external ventilation. Depending on the specific switchgear design, this may result in derating, which can then be compensated for by increasing the cross-sectional area. Temperature rise tests in the specific switchgear can provide specific and detailed information.

Permissible continuous current for circuit-breakers operating in switchboards at various internal ambient temperatures. The switchboard's internal ambient temperature should be estimated using the calculation methods of IEC regulation.

## Design verification as per IEC/EN 61439

| Technical data for design verification   |           |    |     |
|--|-----------|----|-----|
| Rated operational current for specified heat dissipation   | $I_n$     | A  | 630 |
| Equipment heat dissipation, current-dependent  | $P_{vid}$ | W  | 36  |
| Operating ambient temperature min.   |           | °C | -25 |
| Operating ambient temperature max.   |           | °C | 70  |
| IEC/EN 61439 design verification   |           |    |     |
| 10.2 Strength of materials and parts   |           |    |     |
| 10.2.2 Corrosion resistance  |           |    |     |
| Meets the product standard's requirements.   |           |    |     |
| 10.2.3.1 Verification of thermal stability of enclosures   |           |    |     |
| Meets the product standard's requirements.   |           |    |     |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |           |    |     |
| Meets the product standard's requirements.   |           |    |     |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects           |           |    |     |
| Meets the product standard's requirements.   |           |    |     |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |           |    |     |
| Meets the product standard's requirements.   |           |    |     |
| 10.2.5 Lifting   |           |    |     |
| Does not apply, since the entire switchgear needs to be evaluated.   |           |    |     |
| 10.2.6 Mechanical impact   |           |    |     |
| Does not apply, since the entire switchgear needs to be evaluated.   |           |    |     |
| 10.2.7 Inscriptions  |           |    |     |
| Meets the product standard's requirements.   |           |    |     |
| 10.3 Degree of protection of ASSEMBLIES  |           |    |     |
| Does not apply, since the entire switchgear needs to be evaluated.   |           |    |     |
| 10.4 Clearances and creepage distances   |           |    |     |
| Meets the product standard's requirements.   |           |    |     |
| 10.5 Protection against electric shock   |           |    |     |
| Does not apply, since the entire switchgear needs to be evaluated.   |           |    |     |
| 10.6 Incorporation of switching devices and components   |           |    |     |
| Does not apply, since the entire switchgear needs to be evaluated.   |           |    |     |
| 10.7 Internal electrical circuits and connections  |           |    |     |
| Is the panel builder's responsibility.   |           |    |     |
| 10.8 Connections for external conductors   |           |    |     |
| Is the panel builder's responsibility.   |           |    |     |
| 10.9 Insulation properties   |           |    |     |
| 10.9.2 Power-frequency electric strength   |           |    |     |
| Is the panel builder's responsibility.   |           |    |     |
| 10.9.3 Impulse withstand voltage   |           |    |     |
| Is the panel builder's responsibility.   |           |    |     |
| 10.9.4 Testing of enclosures made of insulating material   |           |    |     |
| Is the panel builder's responsibility.   |           |    |     |
| 10.10 Temperature rise   |           |    |     |
| The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |           |    |     |
| 10.11 Short-circuit rating   |           |    |     |
| Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |           |    |     |
| 10.12 Electromagnetic compatibility  |           |    |     |
| Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |           |    |     |
| 10.13 Mechanical function  |           |    |     |
| The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |           |    |     |

## Technical data ETIM 6.0

| Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation prot. (EC000228)   |  |    |  |
|--|--|----|--|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss8.1-27-37-04-09 [AJZ716010]) |  |    |  |
| Rated permanent current $I_u$  |  | A  | 630                                      |
| Rated voltage  |  | V  | 690 - 690                                |
| Rated short-circuit breaking capacity $I_{cu}$ at 400 V, 50 Hz   |  | kA | 42                                       |
| Overload release current setting   |  | A  | 315 - 630                                |
| Adjustment range short-term delayed short-circuit release  |  | A  | 1260 - 6300                              |
| Adjustment range undelayed short-circuit release   |  | A  | 1260 - 7560                              |
| Integrated earth fault protection  |  |    | No                                       |
| Type of electrical connection of main circuit  |  |    | Rail connection                          |
| Device construction  |  |    | Built-in device fixed built-in technique |
| Suitable for DIN rail (top hat rail) mounting  |  |    | No                                       |
| DIN rail (top hat rail) mounting optional  |  |    | No                                       |

|   |             |
|---|-------------|
| Number of auxiliary contacts as normally closed contact | 0           |
| Number of auxiliary contacts as normally open contact   | 0           |
| Number of auxiliary contacts as change-over contact     | 2           |
| Switched-off indicator available                        | Yes         |
| With under voltage release                              | No          |
| Number of poles   | 4           |
| Position of connection for main current circuit         | Back side   |
| Type of control element                                 | Push button |
| Complete device with protection unit                    | Yes         |
| Motor drive integrated                                  | No          |
| Motor drive optional                                    | Yes         |
| Degree of protection (IP)                               | IP20        |

## Dimensions

