



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)



■ Features :

- 1000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package
- 100% burn-in test
- Low cost / High reliability
- 2 years warranty

SELECTION GUIDE


ORDER NO.	SUS01L-05	SUS01M-05	SUS01N-05	SUS01O-05	SUS01L-09	SUS01M-09	SUS01N-09	SUS01O-09
DC OUTPUT VOLTAGE	5V				9V			
OUTPUT CURRENT RANGE	0 ~ 200mA				0 ~ 111mA			
EFFICIENCY	73%	74%	72%	74%	75%	79%	80%	77%

ORDER NO.	SUS01L-12	SUS01M-12	SUS01N-12	SUS01O-12	SUS01L-15	SUS01M-15	SUS01N-15	SUS01O-15
DC OUTPUT VOLTAGE	12V				15V			
OUTPUT CURRENT RANGE	0 ~ 84mA				0 ~ 67mA			
EFFICIENCY	78%	82%	83%	83%	79%	82%	83%	83%

SPECIFICATION

OUTPUT	RATED POWER	1W								
	RIPPLE & NOISE (max.) Note.2	100mVp-p								
	LINE REGULATION Note.3	±1.2% for 1% input variation								
	LOAD REGULATION Note.4	±8.0%								
	VOLTAGE ACCURACY	±2.0%								
	SWITCHING FREQUENCY	50KHz min.								
INPUT	VOLTAGE RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V	
	NORMAL VOLTAGE	5V	12V	24V	48V	5V	12V	24V	48V	
	INPUT CURRENT	Full load	280mA	112mA	55mA	28mA	280mA	112mA	55mA	28mA
		No load	21mA	11mA	10mA	3mA	21mA	11mA	10mA	3mA
	FILTER	Capacitor type								
PROTECTION	Fuse recommended									
PROTECTION	OVERLOAD	Momentary								
		Protection type : Broken								
	SHORT CIRCUIT	Momentary Protection type : Broken								
ENVIRONMENT	WORKING TEMP.	-25 ~ +71°C (Refer to output load derating curve)								
	WORKING HUMIDITY	20% ~ 90% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-25 ~ +105°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)								
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes								
SAFETY & EMC	WITHSTAND VOLTAGE	I/P-O/P: 1KVDC								
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH								
	ISOLATION CAPACITANCE	80pF max.								
OTHERS	MTBF	700khrs min. MIL-HDBK-217F(25°C)								
	DIMENSION	22.6*9.9*8.4mm or 0.89*0.39*0.33" inch (L*W*H)								
	WEIGHT	3.1g								


■ Mechanical Specification

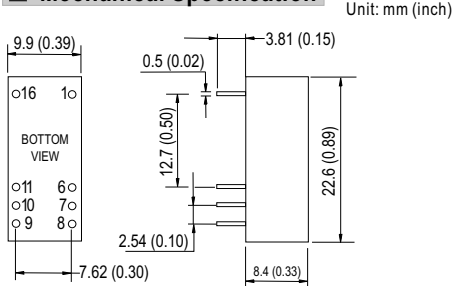

■ Pin Configuration

Pin No.	Output
1 & 16	+Vin
6 & 11	-Vout
7 & 10	+Vout
8 & 9	-Vin

■ Derating Curve

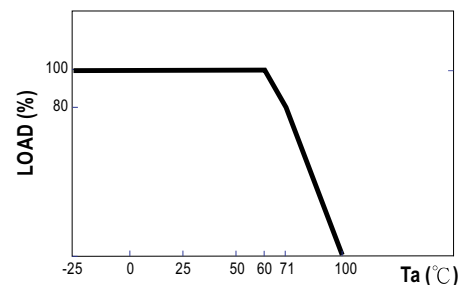

NOTE

1. All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
3. Line regulation is measured from low line to high line at rated load.
4. Load regulation is measured from 20% to 100% rated load.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Input: 4,5-5,5 DC, Output: 1, V1: 5, A1: 0,2	SUS01L05	SUS01L-05	Buy on EAN
Input: 4,5-5,5 DC, Output: 1, V1: 9, A1: 0,111	SUS01L09	SUS01L-09	Buy on EAN
Input: 4,5-5,5 DC, Output: 1, V1: 12, A1: 0,084	SUS01L12	SUS01L-12	Buy on EAN
Input: 4,5-5,5 DC, Output: 1, V1: 15, A1: 0,067	SUS01L15	SUS01L-15	Buy on EAN
Input: 10,8-13,2 DC, Output: 1, V1: 5, A1: 0,2	SUS01M05	SUS01M-05	Buy on EAN
Input: 10,8-13,2 DC, Output: 1, V1: 9, A1: 0,111	SUS01M09	SUS01M-09	Buy on EAN
Input: 10,8-13,2 DC, Output: 1, V1: 12, A1: 0,84	SUS01M12	SUS01M-12	Buy on EAN
Input: 10,8-13,2 DC, Output: 1, V1: 15, A1: 0,067	SUS01M15	SUS01M-15	Buy on EAN
Input: 21,6-26,4 DC, Output: 1, V1: 5, A1: 0,2	SUS01N05	SUS01N-05	Buy on EAN
Input: 21,6-26,4 DC, Output: 1, V1: 9, A1: 0,111	SUS01N09	SUS01N-09	Buy on EAN
Input: 21,6-26,4 DC, Output: 1, V1: 12, A1: 0,084	SUS01N12	SUS01N-12	Buy on EAN
Input: 21,6-26,4 DC, Output: 1, V1: 15, A1: 0,067	SUS01N15	SUS01N-15	Buy on EAN
Input: 43,2-52,8 DC, Output: 1, V1: 5, A1: 0,2	SUS01O05	SUS01O-05	Buy on EAN
Input: 43,2-52,8 DC, Output: 1, V1: 9, A1: 0,111	SUS01O09	SUS01O-09	Buy on EAN
Input: 43,2-52,8 DC, Output: 1, V1: 12, A1: 0,084	SUS01O12	SUS01O-12	Buy on EAN
Input: 43,2-52,8 DC, Output: 1, V1: 15, A1: 0,067	SUS01O15	SUS01O-15	Buy on EAN