




Electric Automation
Automation specialists

Reference: HG 60-35 MW
Code: 2003603

Box, empty cavity wall 2K, Ø68mm,
H35mm, Orange, Polypropylene, PP

[Buy it at Electric Automation Network](#)

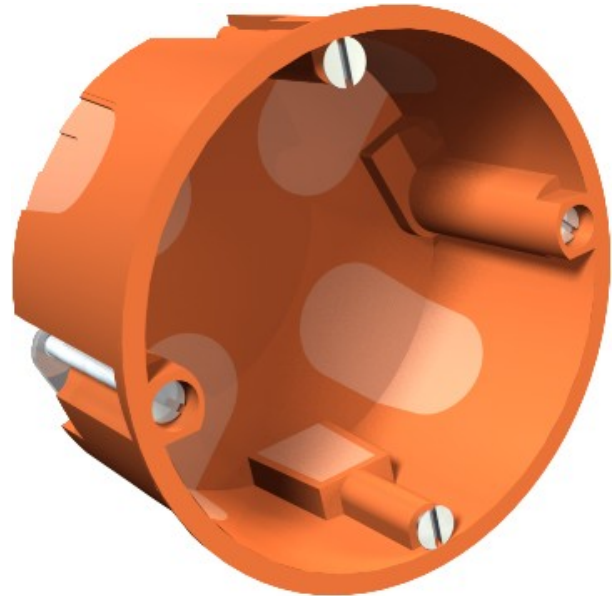

Cavity wall accessory socket, wind-tight version through soft entry membrane. Dimensions to DIN 49073-1, for plate thickness 7-35 mm Standard combination spacing 71 mm, option for continuous wiring using connection support for combinations between accessory sockets and accessory connection sockets, 8 wind-proof insertion membrane for NYM cables, data cables and pipes Ø 20 mm, accessory sockets can also be used as connection sockets to VDE 0606-1 with double bolt fastening and screw-on cover, protection rating IP40.