




Electric Automation
Automation specialists

Reference: 90 PG 9 DSMB
Code: 2032503

Screw-in nipple with puncture membrane, PG9, Light grey, 7035, Polyethylene, PE

[Buy it at Electric Automation Network](#)

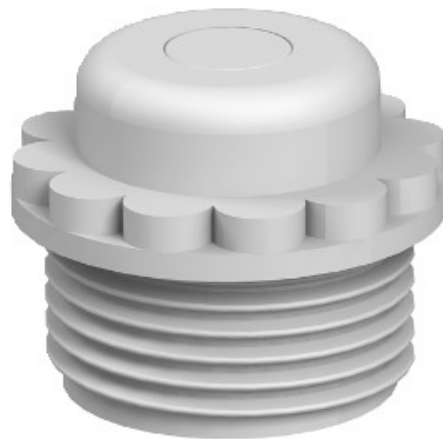

With perforation membrane, the opening D is pre-marked, but closed.

Grip seal to screw into PG thread to DIN 40430.

With self-sealing cone at the end of the thread, therefore no connection thread sealing ring required. Protection rating achievable with careful mounting: IP54.