



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Roof cable holder




Roof cable holder for tiled roofs, Rd 8–10

Type	Fit	Installation height	Length	Pack.	Weight	Item No.
	mm	mm	mm	pcs	kg/100 pcs.	
157 FK-CU 230	Rd 8-10	40	230	50	8.800	5216 18 4
157 FK-CU 280	Rd 8-10	40	280	50	9.600	5216 21 4
157 FK-CU 410	Rd 8-10	40	410	50	13.000	5216 26 5

Cu Copper

/100 pc.

- Conductor holder of polyamide
- Including drill hole in bottom section for quick installation



Roof cable holder for tiled roofs, angled, Rd 8

Type	Fit	Installation height	Length	Pack.	Weight	Item No.
	mm	mm	mm	pcs	kg/100 pcs.	
157 I-VA	Rd 8	26.5	140	50	7.150	5215 62 5

V2A Stainless steel, grade 304

/100 pc.

- Conductor holder high-grade stainless steel (V2A)
- Curved bottom strip for quick installation




Type	Fit	Installation height	Length	Pack.	Weight	Item No.
	mm	mm	mm	pcs	kg/100 pcs.	
157 I-CU	Rd 8	26.5	140	50	7.800	5215 74 9

Cu Copper

/100 pc.

- Conductor holder copper plated high-grade stainless steel (V2A)
- Curved bottom strip for quick installation

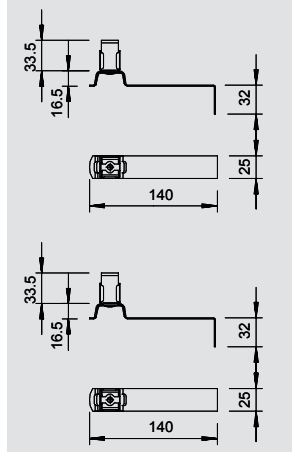

Roof cable holder for tiled roofs, angled, flexible, Rd 8

Type	Fit	Installation height	Length	Pack.	Weight	Item No.
	mm	mm	mm	pcs	kg/100 pcs.	
157 FX-AL	Rd 8	26.5	140	50	3.900	5215 87 5

Al Aluminium

/100 pc.

- With flexible bottom section from aluminium for matching to roof tiles (easy to flex)
- Holder from stainless steel (V2A)
- Curved bottom section for quick installation




Type	Fit	Installation height	Length	Pack.	Weight	Item No.
	mm	mm	mm	pcs	kg/100 pcs.	
157 FX-CU	Rd 8	26.5	140	50	7.500	5215 87 9

Cu Copper

/100 pc.

- With flexible bottom section from copper for matching to roof tiles (easy to flex)
- Holder from copper plated stainless steel (V2A)
- Curved bottom section for quick installation

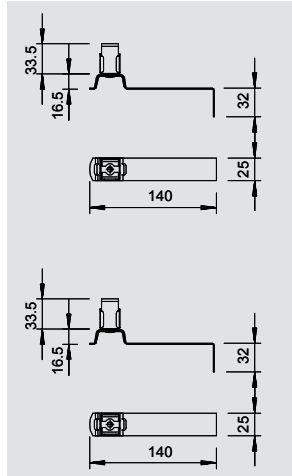


Roof cable holder for tiled roofs, angled, Rd 8–10

Type	Fit	Installation height	Length	Pack.	Weight	Item No.
	mm	mm	mm	pcs	kg/100 pcs.	
157 IK-VA	Rd 8-10	40	140	50	7.150	5215 66 8

V2A Stainless steel, grade 304

/100 pc.

- Conductor holder of polyamide
- Curved bottom strip for quick installation



Roof cable holder for slated roofs, crimped, Rd 8

Type	Fit	Length	Installation height	Pack.	Weight	Item No.
	mm	mm	mm	pcs	kg/100 pcs.	
157 E-VA 35	Rd 8	265	50	50	8.800	5215 50 4

V2A Stainless steel, grade 304

/100 pc.

- Conductor holder from stainless steel (V2A)
- With Ø 5.5 mm drill hole




Type	Fit	Length	Installation height	Pack.	Weight	Item No.
	mm	mm	mm	pcs	kg/100 pcs.	
157 E-VA	Rd 8	265	38.5	50	9.050	5215 50 1

V2A Stainless steel, grade 304

/100 pc.

- Conductor holder from stainless steel (V2A)
- With Ø 5.5 mm drill hole

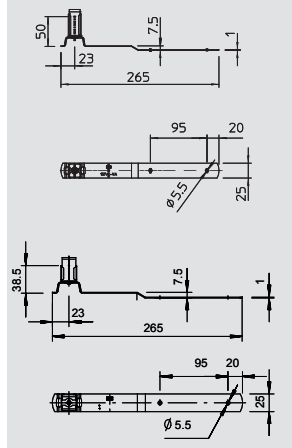



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Roof conductor holder , Stainless steel, grade 304, VA, 1.4301	5215501	157 E-VA	Buy on EAN
Roof conductor holder , Stainless steel, grade 304, VA, 1.4301	5215625	157 I-VA	Buy on EAN
Roof conductor holder , Stainless steel, grade 304, VA, 1.4301	5215668	157 IK-VA	Buy on EAN
Roof conductor holder , Copper, Cu	5215749	157 I-CU	Buy on EAN
Roof conductor holder with flexible base, Aluminium, Alu	5215875	157 FX-AL	Buy on EAN
Roof conductor holder with flexible base, Copper, Cu	5215879	157 FX-CU	Buy on EAN
Roof conductor holder , Copper, Cu	5216184	157 FK-CU 230	Buy on EAN
Roof conductor holder , Copper, Cu	5216214	157 FK-CU 280	Buy on EAN
Roof conductor holder , Copper, Cu	5216265	157 FK-CU 410	Buy on EAN