




Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Connection clamps and connection terminals





Construction clamp to 20 mm



Type	Fit	Clamping area	Pack.	Weight	Item No.
	mm	mm	pcs	kg/100 pcs.	
5010 20 FT	Rd 8-10	4-20	25	30.600	5304 52 0

St Steel **FT** Hot-dip galvanised /100 pc.

- Round conductors can be installed vertical or transverse to structure
- For affixing to structures with a flange thickness of up to 20 mm
- Affixing to structures with a hexagonal bolt M10
- Conforms to the requirements according to DIN VDE 0185-305 (IEC 62305)




Connection terminal to 14 mm



Type	Fit	Clamping area	Pack.	Weight	Item No.
	mm	mm	pcs	kg/100 pcs.	
272 8	Rd 8-10	max. 8	50	22.800	5318 08 4
272 14	Rd 8-10	max. 14	50	25.230	5318 14 9

TG Cast iron **FT** Hot-dip galvanised /100 pc.

- Flange thickness to 8 and/or 14 mm
- With 4 hexagonal bolts M8
- Conforms to the requirements according to DIN V VDE V 0185-3, Section 4.5

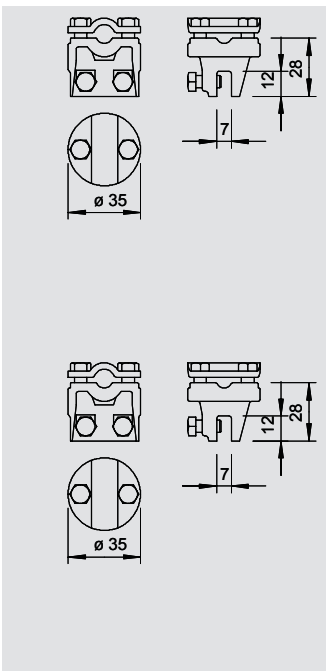

Folding clamp up to 10 mm plate thickness



Type	Fit	Clamping area	Pack.	Weight	Item No.
	mm	mm	pcs	kg/100 pcs.	
269 8-10	Rd 8-10	max. 7	50	14.460	5317 01 0

Zn Die-cast zinc **G** Electrogalvanised /100 pc.

- Plate thickness to 7 mm
- For conductor arrangement transverse and parallel to plate with 4 hexagonal bolts M6 x 16
- Conforms to the requirements according to DIN VDE 0185-305 (IEC 62305)



Type	Fit	Clamping area	Pack.	Weight	Item No.
	mm	mm	pcs	kg/100 pcs.	
269 MS	Rd 8-10	max. 7	50	14.480	5317 05 3

Zn Die-cast zinc **Cu** Copper-plated /100 pc.

- Plate thickness to 7 mm
- For conductor arrangement transverse and parallel to plate with 4 hexagonal bolts M6 x 16
- Conforms to the requirements according to DIN VDE 0185-305 (IEC 62305)



Folding clamp Rd 8-10 up to 10 mm plate thickness



Type	Fit	Clamping area	Pack.	Weight	Item No.
	mm	mm	pcs	kg/100 pcs.	
270 8-10 FT	Rd 8-10	max. 10	50	13.810	5317 20 7

St Steel **FT** Hot-dip galvanised /100 pc.

- Metal thickness to 10 mm
- For cable routing transverse and in parallel to the plate
- Corresponds to the requirements to DIN V VDE V 0185-3 section 4.5



Type	Fit	Clamping area	Pack.	Weight	Item No.
	mm	mm	pcs	kg/100 pcs.	
270 8-10 VA	Rd 8-10	max. 10	50	13.800	5317 20 8

V2A Stainless steel, grade 304

- Metal thickness to 10 mm
- For cable routing transverse and in parallel to the plate
- Corresponds to the requirements to DIN V VDE V 0185-3 section 4.5





Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Construction clamp , 20mm, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	5304520	5010 20 FT	Buy on EAN
Folding clamp , 8/10mm, Electrogalvanised, DIN 50961, Die-cast zinc, Zn	5317010	269 8-10	Buy on EAN
Folding clamp , 8/10mm, Copper-plated, Die-cast zinc, Zn	5317053	269 MS	Buy on EAN
Folding clamp , 8/10mm, Hot-dip galvanised, DIN EN ISO 1461, Steel, St	5317207	270 8-10 FT	Buy on EAN
Terminal , 8mm, Hot-dip galvanised, DIN EN ISO 1461, Cast iron, TG	5318084	272 8	Buy on EAN
Terminal , 14mm, Hot-dip galvanised, DIN EN ISO 1461, Cast iron, TG	5318149	272 14	Buy on EAN