



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

## Sensor/Actuator cable - SAC-3P- 1,5-PUR/A-1L-R-ES 4A - 1400827

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/Actuator cable, 3-position, PUR, black, free cable end, on Valve connector A, with 1 LED, connected with Damping diode, Cable length: 1.5 m, With holding current limiting device for energy reduction

### Key Commercial Data

|              |                     |
|--------------|---------------------|
| Packing unit | 1 STK               |
| GTIN         | <br>4 046356 924511 |

### Technical data

#### Dimensions

|                 |       |
|-----------------|-------|
| Length of cable | 1.5 m |
|-----------------|-------|

#### Ambient conditions

|                                 |                               |
|---------------------------------|-------------------------------|
| Ambient temperature (operation) | -25 °C ... 80 °C (valve plug) |
| Degree of protection            | IP67                          |

#### General

|                              |   |
|------------------------------|---|
| Rated current at 40°C        | 4 A   |
| Rated voltage                | 24 V DC ±20 %   |
| Number of positions          | 3   |
| Insulation resistance        | ≥ 100 MΩ  |
| Standards/regulations        | Valve connector EN 175301-803                           |
| Status display               | 1 LED   |
| Protective circuit/component | Freewheeling diode with holding current limiting device |
| Switch-over time             | approx. 500 ms (Initial operating time)                 |
| Clock frequency              | approx. 800 Hz (Holding current limiting device)        |
| Switching frequency          | max. 1 Hz (Connected valve)                             |

#### Material

|                                     |                   |
|-------------------------------------|-------------------|
| Valve plug contact material         | CuSn              |
| Valve plug contact surface material | Ag                |
| Valve plug contact insert material  | PA 66             |
| Material housing valve plug         | TPU               |
| Sealing material                    | TPU (Seal molded) |

# Sensor/Actuator cable - SAC-3P- 1,5-PUR/A-1L-R-ES 4A - 1400827

## Technical data

### Standards and Regulations

|                       |                 |
|-----------------------|-----------------|
| Standard designation  | Valve connector |
| Standards/regulations | EN 175301-803   |

### Cable

|   |  |
|---|--|
| Cable type                                  | PUR halogen-free black                                     |
| Cable type (abbreviation)                   | PUR  |
| Cable abbreviation                          | Li9Y11Y-HF   |
| UL AWM style                                | 20549  |
| Conductor cross section                     | 3x 0.5 mm <sup>2</sup>                                     |
| AWG signal line                             | 20   |
| Conductor structure signal line             | 28x 0.15 mm  |
| Core diameter including insulation          | 1.5 mm ±0.05 mm (Signal line)                              |
| Wire colors                                 | black 1, black 2, green/yellow                             |
| Overall twist                               | 3 wires, twisted   |
| External sheath, color                      | black-gray RAL 7021  |
| External cable diameter D                   | 4.5 mm ±0.2 mm   |
| Smallest bending radius, fixed installation | 22.5 mm  |
| Number of bending cycles                    | 15000000   |
| Bending radius                              | 50 mm  |
| Traversing path                             | 0.9 m  |
| Traversing rate                             | 5 m/s  |
| Acceleration                                | 30 m/s <sup>2</sup>  |
| Outer sheath, material                      | PUR  |
| Material conductor insulation               | PP   |
| Conductor material                          | Bare Cu litz wires   |
| Insulation resistance                       | min. 20 MΩ*km  |
| Conductor resistance                        | 39 Ω/km (at 20 °C)   |
| Nominal voltage, cable                      | ≤ 300 V  |
| Test voltage, cable                         | ≥ 1200 V   |
| Flame resistance                            | According to DIN VDE 0482                                  |
|   | According to DIN EN 50265-2-1                              |
| Halogen-free                                | in accordance with DIN VDE 0472 part 815                   |
| Other resistance                            | Largely oil-resistant                                      |
|   | partly UV-resistant in accordance with DIN EN ISO 4892-2-A |
| Ambient temperature (operation)             | -40 °C ... 80 °C (cable, fixed installation)               |
|   | -20 °C ... 80 °C (cable, flexible installation)            |

## Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.1 | 27061804 |
|------------|----------|

# Sensor/Actuator cable - SAC-3P- 1,5-PUR/A-1L-R-ES 4A - 1400827

## Classifications

### eCl@ss


|            |          |
|------------|----------|
| eCl@ss 6.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |

### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |


## Drawings

Schematic diagram




Valve connector pin assignment, type A

Cable cross section




PUR halogen-free black [PUR]

Dimensional drawing

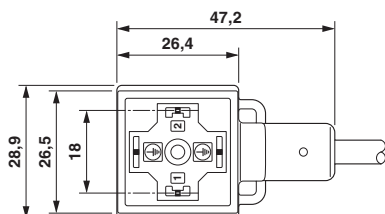


Valve connector, type A

Dimensional drawing



Valve connector, type A, side view

Circuit diagram

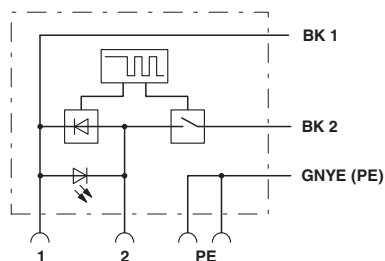

Contact assignment of the valve plug

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product   | Code    | Reference                           | Product link               |
|---|---------|-------------------------------------|----------------------------|
| Sensor/Actuator cable, 3-position, PUR, black, free cable end, on Valve connector A, with 1 LED, connected with Damping diode, Cable length: 1.5 m, With holding current limiting device for energy reduction | 1400827 | SAC-3P- 1,5-<br>PUR/A-1L-R-ES<br>4A | <a href="#">Buy on EAN</a> |