



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

# FO connecting cable - FOC-HCS-GI-1005/M12-C/SCRJ/5 - 1416651

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCF-GI cable, assembled with M12 connector to SC-RJ

## Product Description

PCF-GI cable, assembled with M12 connector to SC-RJ

### Why buy this product

- 2.2 mm individual wires made from polyvinyl chloride (PVC)
- Assembled patch cable with test report
- M12-OPTIC with recessed ferrules to protect against damage
- optimized polishing for even better attenuation values
- Rugged installation cable for indoor use
- Gradient index fiber for maximum performance requirements in terms of transmission bandwidth
- Rugged polyurethane (PUR) outer sheath
- Highly tear-resistant aramid strain relief elements
- Pin connector pattern in accordance with DIN/IEC 61754-27
- Included in PROFINET planning guideline (v1.14)
- Robust connector, IP65/IP67
- Can be used in 10/100/1000 Mbps Ethernet systems
- Halogen-free, ozone, and UV resistant

## Ethernet

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 480741

### Technical data

#### Mechanical characteristics

Number of positions	2
Fiber type	PCF
Fiber	200/230 µm

# FO connecting cable - FOC-HCS-GI-1005/M12-C/SCRJ/5 - 1416651

## Technical data

### Mechanical characteristics

Ferrule diameter	2.50 mm
Connection method	M12 circular connector
Cable diameter	8.00 mm
Type of cable	Break-out cable
Duty cycle testing	Flexible cable conduit capable
Length of cable	5 m

### Ambient conditions

Ambient temperature (operation)	-20 °C ... 70 °C
	-20 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Degree of protection	IP65
	IP67

### Material data

Flammability rating according to UL 94	V0
Outer sheath, material	PUR
External sheath, color	green
Ferrule material	Zirconia ceramics

### Standards and Regulations

Duty cycle testing	Flexible cable conduit capable
Resistance to UV radiation	yes
Impact strength	2 Nm / 10 x
Flammability rating according to UL 94	V0

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27061803
eCl@ss 6.0	27061090
eCl@ss 7.0	27061090
eCl@ss 8.0	27061003

### ETIM

ETIM 3.0	EC000034
ETIM 4.0	EC000034
ETIM 5.0	EC001263

# FO connecting cable - FOC-HCS-GI-1005/M12-C/SCRJ/5 - 1416651


## Classifications

### UNSPSC

UNSPSC 6.01	30211832
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	39121429

## Drawings

Dimensional drawing

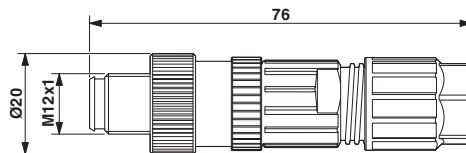

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



**Automatización Eléctrica**  
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
FO connecting cable, Degree of protection: IP65/67, Cable length: 5 m, Number of positions: 2, Connection method: M12 circular connector	1416651	FOC-HCS- GI-1005/M12-C/ SCRJ/5	<a href="#">Buy on EAN</a>