



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

## Bus system cable - SAC-4P-M12MS/ 5,0-960 VA - 1431186

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system cable, FOUNDATION Fieldbus (31.25 kbps), 3-position, PVC, orange RAL 2003, shielded, Plug straight M12, A-coded, on free cable end, Cable length: 5 m



### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 1 STK   |
| GTIN         | <br>4 046356 431668 |

### Technical data

#### Dimensions

|  |       |
|--|-------|
| Length of cable                            | 5 m   |
| Stripping length of the free conductor end | 50 mm |

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |
|                                 | IP69K                            |

#### General

|                       |                                 |
|-----------------------|---------------------------------|
| Rated current at 40°C | 4 A                             |
| Rated voltage         | 250 V                           |
| Number of positions   | 3                               |
| Insulation resistance | ≥ 100 MΩ                        |
| Coding                | A - standard                    |
| Signal type/category  | FOUNDATION Fieldbus, 31.25 kbps |
| Status display        | No                              |
| Overvoltage category  | II                              |
| Degree of pollution   | 3                               |

# Bus system cable - SAC-4P-M12MS/ 5,0-960 VA - 1431186

## Technical data

### General

|                             |                        |
|-----------------------------|------------------------|
| Insertion/withdrawal cycles | ≥ 100                  |
| Torque                      | 0.4 Nm (M12 connector) |

### Material

|  |   |
|--|---|
| Flammability rating according to UL 94 | HB  |
| Contact material                       | CuSn  |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                       | High-grade steel                            |
| Sealing material                       | NBR   |

### Standards and Regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

### Cable

|   |   |
|---|---|
| Cable type                                  | FOUNDATION Fieldbus orange                        |
| Cable type (abbreviation)                   | 960   |
| Cable structure                             | 2xAWG18/7 + 1xAWG20/7                             |
| Conductor cross section                     | 2x 0.75 mm <sup>2</sup> (Signal line)             |
|   | 1x 0.5 mm <sup>2</sup> (Drain wire)               |
| AWG signal line                             | 18  |
| Conductor structure signal line             | 7x 0.40 mm  |
| Core diameter including insulation          | 2.24 mm ±0.05 mm                                  |
| Thickness, insulation                       | 0.5 mm  |
| Wire colors                                 | Blue, orange                                      |
| Twisted pairs                               | 2 cores to the pair                               |
| Overall twist                               | One pair with one drain wire and fillers for core |
| Shielding                                   | Plastic-coated aluminum foil with a drain wire    |
| Optical shield covering                     | 100 %   |
| External sheath, color                      | orange RAL 2003                                   |
| Outer sheath thickness                      | 1 mm  |
| External cable diameter D                   | 7.5 mm ±0.25 mm                                   |
| Smallest bending radius, fixed installation | 75 mm   |
| Cable weight                                | 56.552 kg/km                                      |
| Outer sheath, material                      | PVC   |
| Material conductor insulation               | PO (Signal line)                                  |
| Conductor material                          | Tin-plated Cu litz wires                          |
| Conductor resistance                        | ≤ 19.35 Ω/km (Signal line)                        |
|   | 26 Ω/km (shield)                                  |
| Working capacitance                         | 78 nF (at 1 kHz)                                  |
| Cable capacity                              | 147 pF/m (at 1 kHz, core/shield)                  |

## Bus system cable - SAC-4P-M12MS/ 5,0-960 VA - 1431186

### Technical data

#### Cable

|                                 |                                     |
|---------------------------------|-------------------------------------|
|                                 | ≤ 3.94 pF/m (capacitance unbalance) |
| Signal speed                    | 0.66 c                              |
| Shield attenuation              | 3 dB/km (At 39 kHz)                 |
| Cable impedance                 | 100 Ω ±20 % (At 31.25 kHz)          |
| Inductance                      | 0.6233 µH (per meter)               |
| Nominal voltage, cable          | 300 V                               |
| Special properties              | UL standards PLTC-ER and ITC        |
| Flame resistance                | UL 1685 (CSA FT 4)                  |
|                                 | UL 1685 (vertical tray)             |
|                                 | UL 1666 (riser)                     |
| Ambient temperature (operation) | -40 °C ... 105 °C                   |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |

### Approvals

#### Approvals

---

Approvals

EAC

# Bus system cable - SAC-4P-M12MS/ 5,0-960 VA - 1431186

## Approvals

Ex Approvals


Approvals submitted

## Approval details

EAC


## Drawings

Schematic diagram




Pin assignment M12 plug, 4-pos., A-coded, view plug side

Cable cross section




FOUNDATION Fieldbus orange [960]

Dimensional drawing



M12 x 1 plug, straight

Circuit diagram

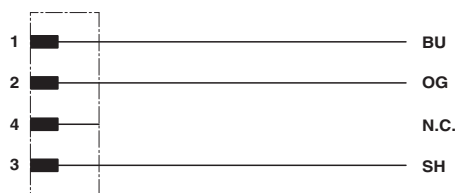

Contact assignment of the M12 plug



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product  | Code    | Reference                   | Product link               |
|--|---------|-----------------------------|----------------------------|
| Bus system cable, FOUNDATION Fieldbus (31.25 kbps), 3-position, PVC, orange RAL 2003, shielded, Plug straight M12, A-coded, on free cable end, Cable length: 5 m | 1431186 | SAC-4P-M12MS/<br>5,0-960 VA | <a href="#">Buy on EAN</a> |