



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)


## Housing - HC-B 6-TFL-H-O1STM32S - 1460030

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B6 sleeve housing, for single locking latch, height: 72 mm, with 1 x M32 thread, lateral cable outlet

### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 10 STK  |
| GTIN         | <br>4 046356 695206 |

### Technical data

#### Dimensions

|        |       |
|--------|-------|
| Height | 72 mm |
| Width  | 43 mm |
| Length | 60 mm |

#### Ambient conditions

|                                      |                   |
|--------------------------------------|-------------------|
| Degree of protection of housing (IP) | IP65              |
| Ambient temperature (operation)      | -40 °C ... 125 °C |

#### General

|                              |   |
|------------------------------|---|
| Note                         | For contact inserts HC-B6, BB10, DD24, M Tall housings for extra large wiring space |
| Size                         | B6  |
| Housing type                 | Sleeve housing  |
| Locking type                 | for single locking latch  |
| No. of cable outlets         | 1   |
| Cable exit                   | Lateral   |
| Screw connection             | none  |
| Type of the screw connection | 1x M32  |
| Housing material             | Aluminum die-cast   |
| Housing surface material     | Powder-coated, gray   |

# Housing - HC-B 6-TFL-H-O1STM32S - 1460030

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440202 |
| eCl@ss 9.0 | 27440202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11     | 31261502 |
| UNSPSC 12.01  | 31261502 |
| UNSPSC 13.2   | 31261502 |

## Approvals

### Approvals

---

Approvals

EAC

---

Ex Approvals

---

Approvals submitted

---


### Approval details

|     |
|-----|
| EAC |
|-----|

## Drawings

## Housing - HC-B 6-TFL-H-O1STM32S - 1460030

Dimensional drawing

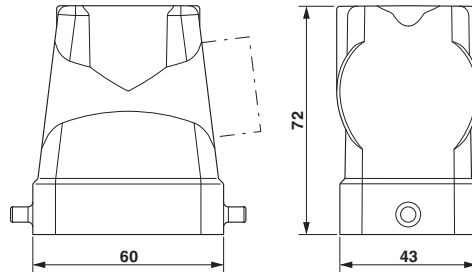

Dimensional drawing

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| <b>Product</b>   | <b>Code</b> | <b>Reference</b>      | <b>Product link</b>        |
|--|-------------|-----------------------|----------------------------|
| HEAVYCON B6 sleeve housing, for single locking latch, height: 72 mm, with 1 x M32 thread, lateral cable outlet | 1460030     | HC-B 6-TFL-H-O1STM32S | <a href="#">Buy on EAN</a> |