



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Bus system cable - SAC-2P-M12MSB/ 1,0-910/M12FSB - 1507366

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system cable, PROFIBUS (12 Mbps), 2-position, PUR halogen-free, violet RAL 4001, shielded, Plug straight M12, B-coded, on Socket straight M12, B-coded, Cable length: 1 m



Key Commercial Data

| | |
|--------------|--|
| Packing unit | 1 STK |
| GTIN |  4 017918 900182 |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 1 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |

General

| | |
|-----------------------------|--------------------------------|
| Rated current at 40°C | 4 A |
| Rated voltage | 250 V |
| Number of positions | 2 |
| Insulation resistance | ≥ 100 MΩ |
| Coding | B - inverse |
| Signal type/category | PROFIBUS, 12 Mbps (max. 100 m) |
| Status display | No |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Insertion/withdrawal cycles | ≥ 100 |
| Torque | 0.4 Nm (M12 connector) |

Material

Bus system cable - SAC-2P-M12MSB/ 1,0-910/M12FSB - 1507366

Technical data

Material

| | |
|--------------------------|---|
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 6.6 (plug), TPU GF (socket) |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |
| Sealing material | NBR |

Pin assignment

| | |
|--|--------------------------------------|
| Position = wire color (signal) = position (optional) | 2 (Plug) = GN (A cable) = 2 (Socket) |
| | 4 (Plug) = RD (B cable) = 4 (Socket) |

Cable

| | |
|---|--|
| Cable type | PROFIBUS |
| Cable type (abbreviation) | 910 |
| UL AWM style | 21198 (80°C/300 V) |
| Cable structure | 1x2xAWG24/19 |
| Conductor cross section | 2x 0.25 mm ² (Signal line) |
| AWG signal line | 24 |
| Conductor structure signal line | 19x 0.13 mm |
| Core diameter including insulation | 2.55 mm ±0.07 mm |
| Wire colors | Red, green |
| Overall twist | 2 cores with 2 fillers to the core |
| Shielding | Plastic-coated aluminum foil, tinned copper braided shield |
| Optical shield covering | 85 % |
| External sheath, color | violet RAL 4001 |
| External cable diameter D | 7.8 mm ±0.2 mm |
| Smallest bending radius, fixed installation | 40 mm |
| Smallest bending radius, movable installation | 65 mm |
| Number of bending cycles | 4000000 |
| Bending radius | 65 mm |
| Traversing path | 4.5 m |
| Traversing rate | 3 m/s |
| Acceleration | 3 m/s ² |
| Number of bending cycles | 5000000 |
| Bending radius | 80 mm |
| Traversing path | 4.5 m |
| Traversing rate | 3 m/s |
| Acceleration | 3 m/s ² |
| Outer sheath, material | PUR |
| Material, filler | PP |
| Material conductor insulation | Foam-Skin PP |
| Conductor material | Tin-plated Cu litz wires |

Bus system cable - SAC-2P-M12MSB/ 1,0-910/M12FSB - 1507366

Technical data

Cable

| | |
|---------------------------------|---|
| Insulation resistance | ≥ 5 GΩ*km |
| Conductor resistance | ≤ 78.6 Ω/km |
| Cable capacity | nom. 30 pF/m |
| Wave impedance | 150 Ω ±10 % (3 MHz ... 20 MHz) |
| Wave attenuation | ≤ 0.049 dB/m (at 16 MHz) |
| Nominal voltage, cable | 30 V |
| Test voltage Core/Core | 1500 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 1500 V (50 Hz, 1 min.) |
| Flame resistance | UL 1581, Sec. 1060 (FT-1) |
| | IEC 60332-1-2 |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| | According to IEC 60754-1 |
| Other resistance | Low adhesion |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -30 °C ... 80 °C (cable, flexible installation) |
| | ≤ 70 °C (cable, drag chain applications) |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Bus system cable - SAC-2P-M12MSB/ 1,0-910/M12FSB - 1507366

Approvals

Approvals

Approvals

EAC

Ex Approvals


Approvals submitted

Approval details

| |
|-----|
| EAC |
|-----|


Drawings

Schematic diagram




Pin assignment M12 male connector, 5-pos., B-coded, male side

Schematic diagram




Pin assignment M12 socket, 5-pos., B-coded, female side

Cable cross section



PROFIBUS [910]


Dimensional drawing

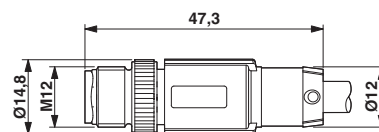


Plug, M12 x 1, straight, shielded

Bus system cable - SAC-2P-M12MSB/ 1,0-910/M12FSB - 1507366

Dimensional drawing

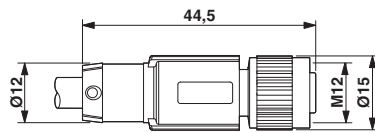

Circuit diagram

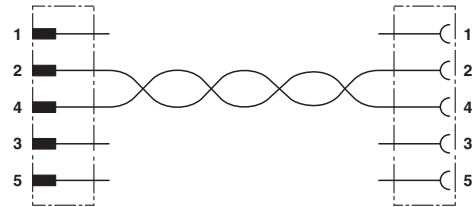

M12 x 1 socket, straight, shielded

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product | Code | Reference | Product link |
|---|---------|----------------------------------|----------------------------|
| Bus system cable, PROFIBUS (12 Mbps), 2-position, PUR halogen-free, violet RAL 4001, shielded, Plug straight M12, B-coded, on Socket straight M12, B-coded, Cable length: 1 m | 1507366 | SAC-2P-M12MSB/ 1,0-910/M12FSB | Buy on EAN |