



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

## FO PCB terminal block - FOPT 2,2-T - 1907911


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB terminal block, Pitch: 10.16 mm, Number of positions: 1, Connection method: Push-in spring connection, Mounting: Wave soldering, Conductor/PCB connection direction: 0 °, Color: green, Green housing with transmit diode/fiber optics that can be connected: polymer fiber (according to IEC 60793-2 type A4a, diameter of outer sheath: 2.2 mm)/data rate: 5 Mbps/transmission distance: max. 50 m/detailed data sheet on request

### Why buy this product

- Connection without fiber pretreatment, easy cutting using IBS RL FOC fiber cutter
- Bend protection sleeve supplied as standard
- Stability thanks to additional strain relief
- More user friendly thanks to direct plug-in technology with release button
- Integrated transmit and receive diode



### Key Commercial Data

Packing unit	10 STK
GTIN	

### Technical data

#### Dimensions

Pitch	10.16 mm
Constructional height	11 mm

#### General

Range of articles	FOPT
Connection in acc. with standard	EN-VDE
Nominal cross section	0 mm <sup>2</sup>
Solder pin surface	Sn
Flammability rating according to UL 94	HB
Number of positions	1

#### Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

# FO PCB terminal block - FOPT 2,2-T - 1907911

## Technical data

### Standards and Regulations

Flammability rating according to UL 94	HB
--	----

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002643

### UNSPSC

UNSPSC 6.01	30211832
UNSPSC 7.0901	39121429
UNSPSC 11	39121429
UNSPSC 12.01	39121429
UNSPSC 13.2	39121429

## Approvals

### Approvals

---

Approvals

EAC

---

Ex Approvals

---

Approvals submitted

---

Approval details


# FO PCB terminal block - FOPT 2,2-T - 1907911

## Approvals


EAC

## Drawings


Drilling diagram

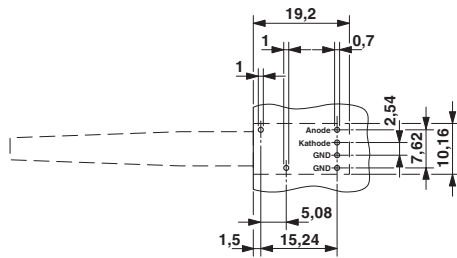

Dimensional drawing

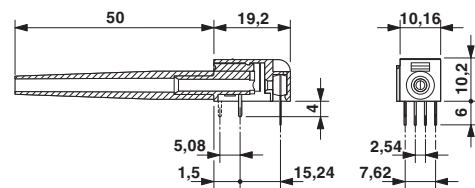


Circuit diagram

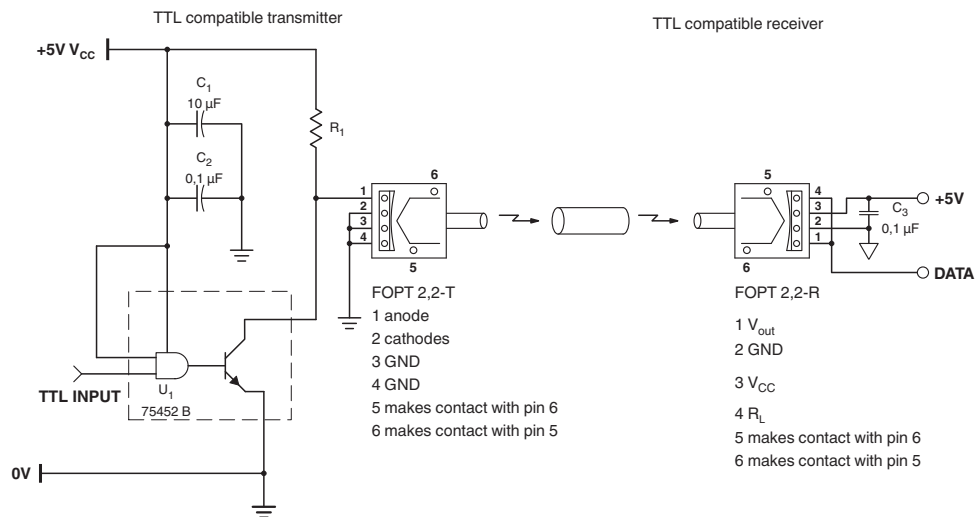

# FO PCB terminal block - FOPT 2,2-T - 1907911

Block diagram

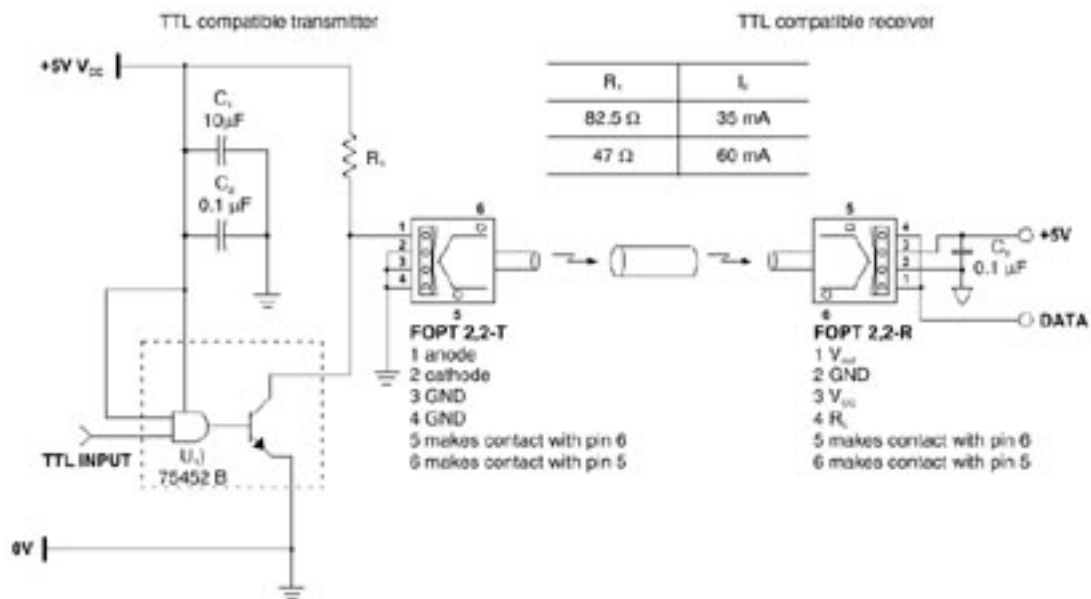

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
 Flachsmarktstr. 8  
 32825 Blomberg  
 Germany  
 Tel. +49 5235 300  
 Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
PCB terminal block, Pitch: 10.16 mm, Number of positions: 1, Connection method: Push-in spring connection, Mounting: Wave soldering, Conductor/PCB connection direction: 0 °, Color: green, Green housing with transmit diode/fiber optics that can be connected: polymer fiber (according to IEC 60793-2 type A4a, diameter of outer sheath: 2.2 mm)/data rate: 5 Mbps/transmission distance: max. 50 m/detailed data sheet on request	1907911	FOPT 2,2-T	<a href="#">Buy on EAN</a>