



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

FO PCB terminal block - FOPT 2,2-R - 1907924


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, Pitch: 10.16 mm, Number of positions: 1, Connection method: Push-in spring connection, Mounting: Wave soldering, Conductor/PCB connection direction: 0 °, Color: black, Black, shielded housing with receive diode / optic fibers can be connected: Polymer fiber (in acc. with IEC 60793-2 type A4a, diameter outer sheath 2.2 mm) / data rate: 5 Mbps / transmission distance max. 50 m / detailed data sheet available on request

Why buy this product

- Connection of fiber optics without fiber pretreatment
- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- Intuitive use through colour coded actuation lever



Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 606572

Technical data

Dimensions

Pitch	10.16 mm
Constructional height	11 mm

General

Range of articles	FOPT
Connection in acc. with standard	EN-VDE
Nominal cross section	0 mm ²
Solder pin surface	Sn
Flammability rating according to UL 94	HB
Number of positions	1

Standards and Regulations

Connection in acc. with standard	EN-VDE
Flammability rating according to UL 94	HB

FO PCB terminal block - FOPT 2,2-R - 1907924

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002643

UNSPSC

UNSPSC 6.01	30211832
UNSPSC 7.0901	39121429
UNSPSC 11	39121429
UNSPSC 12.01	39121429
UNSPSC 13.2	39121429

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC


Drawings

FO PCB terminal block - FOPT 2,2-R - 1907924


Drilling diagram

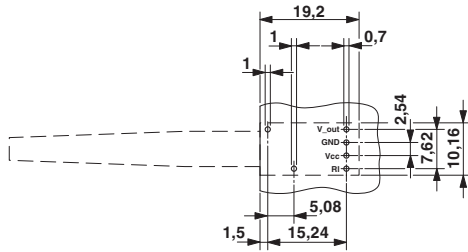


Dimensional drawing

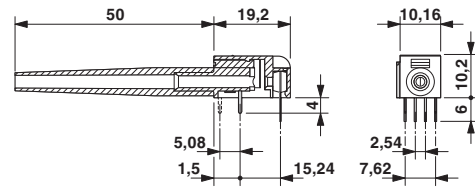

Circuit diagram

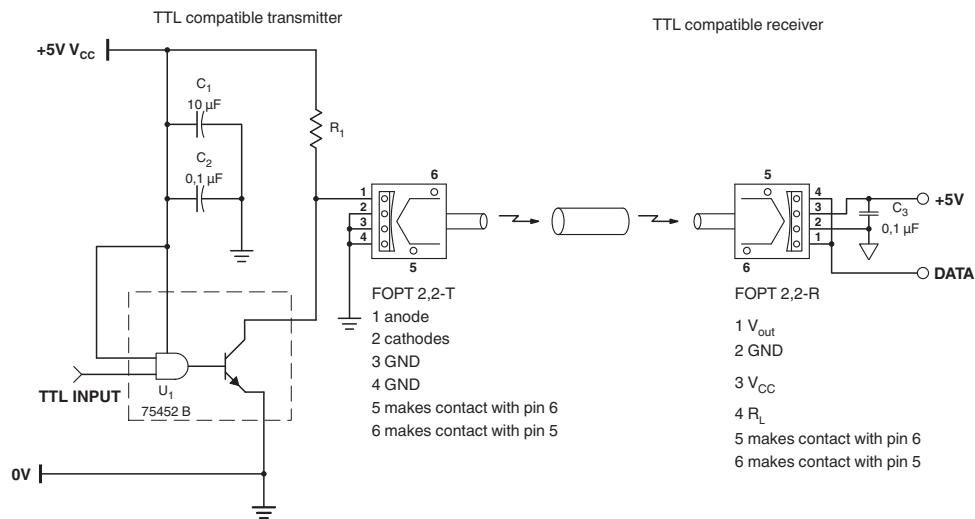

Block diagram

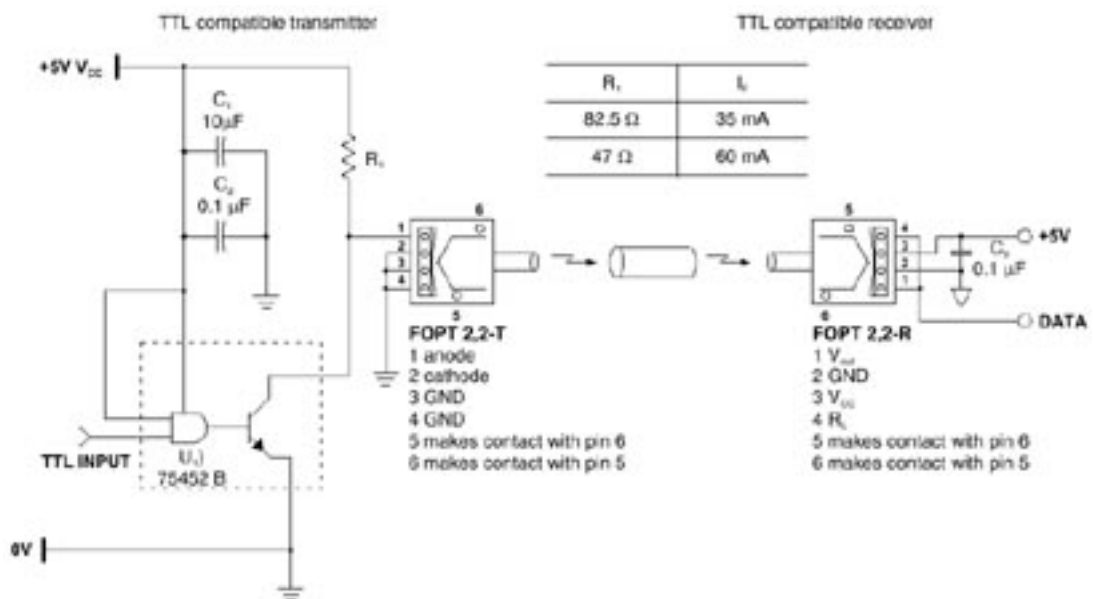

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
PCB terminal block, Pitch: 10.16 mm, Number of positions: 1, Connection method: Push-in spring connection, Mounting: Wave soldering, Conductor/PCB connection direction: 0 °, Color: black, Black, shielded housing with receive diode / optic fibers can be connected: Polymer fiber (in acc. with IEC 60793-2 type A4a, diameter outer sheath 2.2 mm) / data rate: 5 Mbps / transmission distance max. 50 m / detailed data sheet available on request	1907924	FOPT 2,2-R	Buy on EAN