At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. HERE

Current transformer - PACT MCR-V2-4012- 70- 300-5A-1 - 2277679

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Window-type current transformer, 300 A AC primary current; 5 A AC secondary current; accuracy class 1; 7.5 VA rated power

Key Commercial Data

Packing unit	1 STK
GTIN	4 046356 460217

Technical data

Dimensions

Primary round conductor (diameter)	33 mm
Primary round conductor (width)	40 mm
Primary round conductor (height)	12 mm
Note on dimensions	2
Primary round conductor (width)	30 mm
Primary round conductor (height)	10 mm
Width	30 mm
Height	90 mm
Depth	70 mm
Width with alternative assembly	70 mm
Height with alternative assembly	90 mm
Depth with alternative assembly	30 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 40 °C
Ambient temperature (storage/transport)	-25 °C ... 40 °C

Input data

Thermal rated short-time current	$I_{th} = 60 * I_n$
Thermal rated continuous current	$I_d = 1.2 * I_n$
Rated surge current	$I_{dyn} = 2.5 * I_{th}$
Rated frequency: Standard converter	50 Hz ... 60 Hz
Rated frequency: Calibrated converter	50 Hz

Current transformer - PACT MCR-V2-4012- 70- 300-5A-1 - 2277679

Technical data

Input data

Surge current limitation factor	FS 5
Rated power	7.5 VA
Primary rated current I_{pn}	0 A ... 300 A
Secondary rated current I_{sn}	1 A AC (depends on type)
	5 A AC (depends on type)

General

Converter type	Plug-on converters
Accuracy class	0.2 (depends on type)
	0.5 (depends on type)
	1 (depends on type)
	0.2S (depends on type)
	0.5S (depends on type)
Can be calibrated	no
Rated insulation voltage	1 kV (Phase/neutral conductor)
Standards/regulations	EN 50178
	EN 61869
Color	black
Housing material	WELLAMID 6600-PA66-GV 20 HWV0CP

Standards and Regulations

Standards/regulations	EN 50178
	EN 61869

Classifications

eCl@ss

eCl@ss 4.0	27210902
eCl@ss 4.1	27210902
eCl@ss 5.0	27210902
eCl@ss 5.1	27210902
eCl@ss 6.0	27210902
eCl@ss 7.0	27210902
eCl@ss 8.0	27210902

ETIM

ETIM 2.0	EC001505
ETIM 3.0	EC001505
ETIM 4.0	EC002048
ETIM 5.0	EC002048

Current transformer - PACT MCR-V2-4012- 70- 300-5A-1 - 2277679

Classifications

UNSPSC

UNSPSC 6.01	30211501
UNSPSC 7.0901	39121019
UNSPSC 11	39121006
UNSPSC 12.01	39121006
UNSPSC 13.2	39121006

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

Approval details

EAC

Drawings

Dimensional drawing

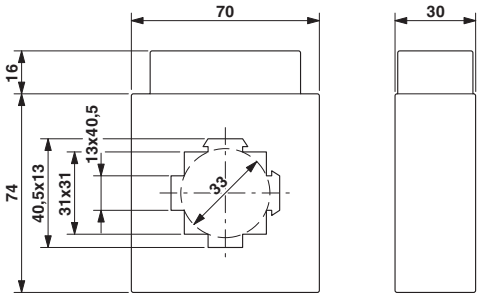

Phoenix Contact 2016 © - all rights reserved
http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
http://www.phoenixcontact.com

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
Window-type current transformer, 300 A AC primary current; 5 A AC secondary current; accuracy class 1; 7.5 VA rated power	2277679	PACT MCR-V2-4012- 70-300-5A-1	Buy on EAN