



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Surge protection device - C-UB/E - 2763701

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Attachment plug with surge protection, for coaxial signal interfaces with floating shield. Connection: BNC socket/plug

Key Commercial Data

| | |
|--------------|---------------------|
| Packing unit | 10 STK |
| GTIN | 4 017918 065638 |

Technical data

Dimensions

| | |
|--------|---------|
| Height | 2.54 mm |
| Width | 25.4 mm |
| Depth | 80 mm |

Ambient conditions

| | |
|---------------------------------|------------------|
| Ambient temperature (operation) | -40 °C ... 80 °C |
| Degree of protection | IP20 |

General

| | |
|---|---|
| Housing material | Aluminum |
| Color | black |
| Standards for clearances and creepage distances | DIN VDE 0110-1 |
| | IEC 60664-1 |
| Mounting type | Connection-specific intermediate plugging |
| Type | Attachment plug |
| Direction of action | Line-Shield/Earth Ground |

Protective circuit

| | |
|-------------------------|----|
| IEC test classification | C2 |
| | C3 |
| | D1 |
| VDE requirement class | C2 |
| | C3 |
| | D1 |

Surge protection device - C-UB/E - 2763701

Technical data

Protective circuit

| | |
|--|--|
| Maximum continuous voltage U_C | 180 V DC |
| | 130 V AC |
| Maximum continuous voltage U_C (wire-ground) | 180 V DC |
| | 130 V AC |
| Nominal current I_N | 3.5 A (25 °C) |
| Operating effective current I_C at U_C | $\leq 1 \mu\text{A}$ |
| Residual current I_{PE} | $\leq 2 \mu\text{A}$ |
| Nominal discharge current I_n (8/20) μs (Core-Earth) | 5 kA |
| Nominal discharge current I_n (8/20) μs (Core-Shield) | 5 kA |
| Nominal discharge current I_n (8/20) μs (Shield-Earth) | 5 kA |
| Total surge current (8/20) μs | 10 kA |
| Nominal pulse current I_{an} (10/1000) μs (Core-Earth) | 100 A |
| Output voltage limitation at 1 kV/ μs (Core-Earth) spike | $\leq 470 \text{ V}$ |
| Output voltage limitation at 1 kV/ μs (Core-Shield) spike | $\leq 590 \text{ V}$ |
| Output voltage limitation at 1 kV/ μs (Shield-Earth) spike | $\leq 470 \text{ V}$ |
| Output voltage limitation at 1 kV/ μs (Core-Earth) static | $\leq 470 \text{ V}$ |
| | $\leq 33 \text{ V}$ |
| Output voltage limitation at 1 kV/ μs (Shield-Earth) static | $\leq 33 \text{ V}$ |
| Residual voltage at I_n (conductor-ground) | $\leq 160 \text{ V}$ (1.5 m cable) |
| Residual voltage at I_n (conductor-shield) | $\leq 55 \text{ V}$ |
| Residual voltage at I_n (shield-ground) | $\leq 160 \text{ V}$ (1.5 m cable) |
| Voltage protection level U_p (core-ground) | $\leq 500 \text{ V}$ (C2 - 10 kV / 5 kA) |
| Voltage protection level U_p (core-shield) | $\leq 700 \text{ V}$ (C2 - 10 kV / 5 kA) |
| Voltage protection level U_p (shield-ground) | $\leq 500 \text{ V}$ (C2 - 10 kV / 5 kA) |
| Response time t_A (Core-Earth) | $\leq 100 \text{ ns}$ |
| Response time t_A (Core-GND) | $\leq 100 \text{ ns}$ |
| Response time t_A (Shield-Earth) | $\leq 100 \text{ ns}$ |
| Input attenuation a_E , asym. | 0.1 dB ($\leq 100 \text{ MHz}$) |
| Cut-off frequency f_g (3 dB), asym. (shield) in 50 Ohm system | typ. 1 GHz |
| Standing wave ratio SWR in a 50 Ω system | typ. 1.3 ($\leq 150 \text{ MHz}$) |
| Permissible HF power P_{max} at VSWR = xx (50 ohm system) | 300 W (VSWR = 1.1) |
| | 80 W (VSWR = ∞) |
| Capacity asymmetrical (shield) | 7 pF (typical) |
| Impulse durability (conductor-ground) | C2 - 10 kV/5 kA |
| | D1 - 2,5 kA |
| Impulse durability (shield-ground) | C2 - 10 kV / 5 kA |
| | D1 (2.5 kA) |

Connection data

| | |
|-------------------|-----------------|
| Connection method | BNC 50 Ω |
|-------------------|-----------------|

Surge protection device - C-UB/E - 2763701

Technical data

Connection data

| | |
|---------------------|------------|
| Connection type IN | BNC socket |
| Connection type OUT | BNC plug |

Connection, equipotential bonding

| | |
|-------------------|---------------|
| Connection method | PVC litz wire |
|-------------------|---------------|

Standards and Regulations

| | |
|-----------------------|--------------|
| Standards/regulations | IEC 61643-21 |
|-----------------------|--------------|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140201 |
| eCl@ss 4.1 | 27130801 |
| eCl@ss 5.0 | 27130801 |
| eCl@ss 5.1 | 27130801 |
| eCl@ss 6.0 | 27130807 |
| eCl@ss 7.0 | 27130807 |
| eCl@ss 8.0 | 27130807 |
| eCl@ss 9.0 | 27130807 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000943 |
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |
| ETIM 5.0 | EC000943 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11 | 39121610 |
| UNSPSC 12.01 | 39121610 |
| UNSPSC 13.2 | 39121620 |

Approvals

Approvals

Approvals

EAC / EAC

Surge protection device - C-UB/E - 2763701

Approvals

Ex Approvals

Approvals submitted


Approval details

EAC


EAC

Drawings

Dimensional drawing

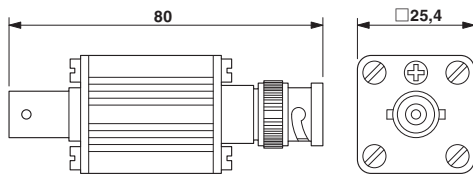


Circuit diagram

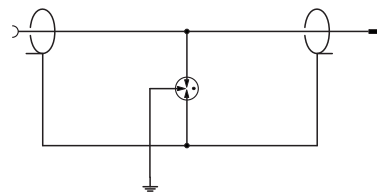

Surge protection device - C-UB/E - 2763701

Diagram

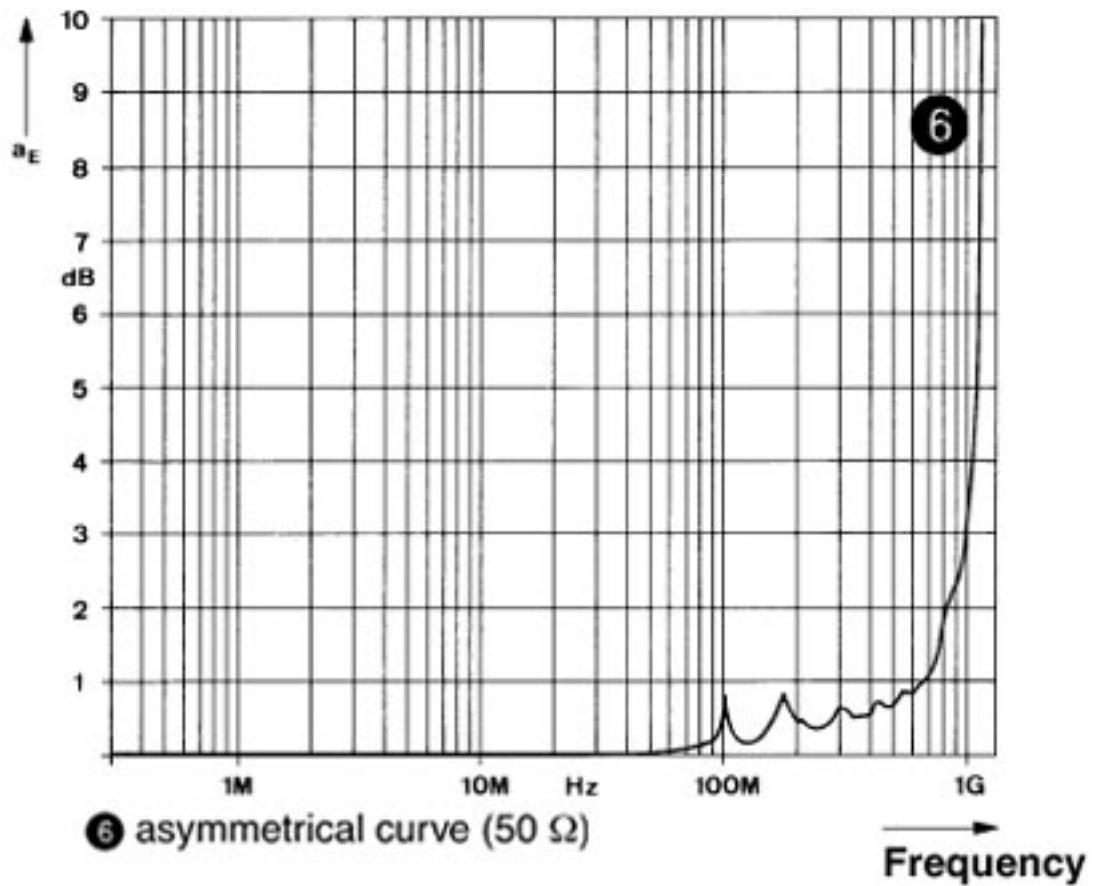

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

| Product | Code | Reference | Product link |
|--|---------|-----------|----------------------------|
| Attachment plug with surge protection, for coaxial signal interfaces with floating shield. Connection: BNC socket/plug | 2763701 | C-UB/E | Buy on EAN |