



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Surge protection device - CN-LAMBDA/4-0.47-SB - 2800022

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Attachment plug with Lambda/4 technology as surge protection for coaxial signal interfaces. Connection: N connectors plug/socket

Why buy this product

- Low protection level
- High HF power in the kW range
- Maintenance-free surge protection with LAMBDA/4 technology

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 367950

Technical data

Dimensions

Height	32 mm
Width	32 mm
Depth	81 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 90 °C
Degree of protection	IP68

General

Housing material	Brass (CuZn)
Color	nickel
Mounting type	Connection-specific intermediate plugging
Type	Attachment plug
Number of positions	1
Direction of action	Line-Shield/Earth Ground

Protective circuit

IEC test classification	C2
	C3

Surge protection device - CN-LAMBDA/4-0.47-SB - 2800022

Technical data

Protective circuit

	D1
VDE requirement class	C2
	C3
	D1
Nominal current I_N	5 A (25 °C)
Nominal discharge current I_n (8/20) μ s (Core-Earth)	20 kA
Nominal discharge current I_n (8/20) μ s (Core-Shield)	20 kA
Total surge current (8/20) μ s	30 kA
Total surge current (10/350) μ s	15 kA
Max. discharge current I_{max} (8/20) μ s maximum (Core-Earth)	30 kA
Max. discharge current I_{max} (8/20) μ s maximum (Core-Shield)	30 kA
Impulse discharge current (10/350) μ s, peak value I_{imp}	≤ 15 kA
Output voltage limitation at 1 kV/ μ s (Core-Earth) spike	≤ 55 V (6 kV/3 kA)
Output voltage limitation at 1 kV/ μ s (Core-Shield) spike	≤ 55 V (6 kV/3 kA)
Output voltage limitation at 1 kV/ μ s (Core-Earth) static	≤ 55 V
Output voltage limitation at 1 kV/ μ s (Core-Shield) static	≤ 55 V
Voltage protection level U_p (core-ground)	≤ 95 V (C2 - 10 kV / 5 kA)
Voltage protection level U_p (core-shield)	≤ 95 V (C2 - 10 kV / 5 kA)
Input attenuation aE, asym.	typ. 0.05 dB (≤ 0.10 dB)
Frequency range	380 MHz ... 470 MHz
Standing wave ratio SWR in a 50 Ω system	typ. 1.05 ($\leq 1,15$)
Permissible HF power P_{max} at VSWR = xx (50 ohm system)	≤ 800 W
	≤ 4 kW (peak)
Impulse durability (conductor-ground)	C2 - 10 kV/5 kA
	D1 - 2,5 kA
Impulse durability (conductor-shield)	C2 - 10 kV/5 kA
	D1 - 2.5 kA

Connection data

Connection method	N Connector
Connection type IN	N connector, male
Connection type OUT	N connector, female

Standards and Regulations

Standards/regulations	IEC 61643-21
-----------------------	--------------

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801

Surge protection device - CN-LAMBDA/4-0.47-SB - 2800022

Classifications

eCl@ss

eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC

Drawings

Surge protection device - CN-LAMBDA/4-0.47-SB - 2800022

Circuit diagram

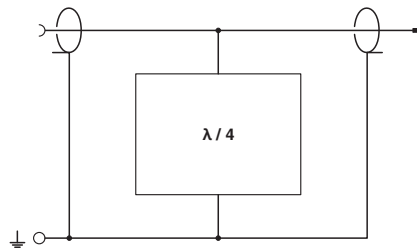

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Attachment plug with Lambda/4 technology as surge protection for coaxial signal interfaces. Connection: N connectors plug/socket	2800022	CN- LAMBDA/4-0.47- SB	Buy on EAN