



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

DIN rail bus connectors - HBUS 53,6-16P-1S BK - 2896458

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug component, Nominal current: 3 A, Number of positions: 16, Pitch: 2.54 mm, Color: jet black



Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 103176

Technical data

General

Housing material	Polyamide
Color	black

Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C (Depends on the derating curve)
---------------------------------	---

Dimensions

Length	37.1 mm
Width	53.6 mm
Pitch	2.54 mm

Technical data

Connection in acc. with standard	CUL
Nominal voltage U_N	60 V
Nominal current I_N	2 A
Indicator1	CUL1
Flammability rating according to UL 94	V0
Number of positions	16

Standards and Regulations

Connection in acc. with standard	CUL
----------------------------------	-----

DIN rail bus connectors - HBUS 53,6-16P-1S BK - 2896458

Technical data

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Classifications

eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440309

ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC002637
ETIM 5.0	EC002638

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized


Ex Approvals


Approvals submitted

Approval details


DIN rail bus connectors - HBUS 53,6-16P-1S BK - 2896458

Approvals

UL Recognized 	
Nominal current I _N	2 A
Nominal voltage U _N	60 V


cUL Recognized 	
Nominal current I _N	2 A
Nominal voltage U _N	60 V

EAC

cULus Recognized 
--

Drawings

Dimensional drawing

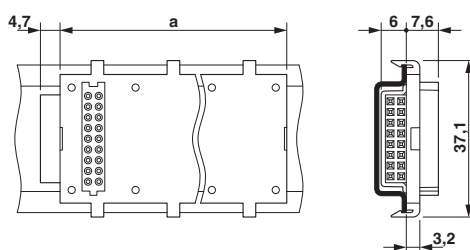

A=53.6 mm

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Plug component, Nominal current: 3 A, Number of positions: 16, Pitch: 2.54 mm, Color: jet black	2896458	HBUS 53,6-16P-1S BK	Buy on EAN