



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Wireless module - RAD-ISM-900-EN-BD-BUS - 2900017

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Wireless transceiver (transmitter and receiver) with Ethernet, RS-232, RS-485 interfaces and bus foot, for 900 MHz ISM band (America).
This product is exclusively for export outside of the European Economic Area (EEA).


The illustration shows version 2900016 RAD-ISM-900-EN-BD

Why buy this product

- Secure data transmission with 128/192/256-bit AES encryption
- Includes a transmitter that can be set from 10 mW ... 1 W
- Supports TCP/IP, UDP, and IPv4 protocols
- Operates in the license-free 902 - 928 MHz ISM band
- Can be programmed for point-to-point, point-to-multipoint, and multipoint-to-point configurations
- Provides an interface for data transmission between a 900 MHz wireless transmission system and Ethernet, RS-232, RS-422 or RS-485 interfaces
- Frequency hopping spread spectrum



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 490115

Technical data

Note

Trade restriction	The products are offered exclusively for export outside the EU and the European Economic Area.
-------------------	--

Dimensions

Width	52 mm
Height	99 mm
Depth	115 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 65 °C
---------------------------------	------------------

Wireless module - RAD-ISM-900-EN-BD-BUS - 2900017

Technical data

Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 75 °C
Degree of protection	IP20

Wireless set

Set contents	1 transceiver
--------------	---------------

Wireless path

Direction	Bi-directional
Frequency range	902 MHz ... 928 MHz
Transmission power	1 W (adjustable in 1 dBm increments)
Transmit capacity, minimum	10 dBm
Transmit capacity, maximum	30 dBm

Serial interface

Designation	RS-232
Data rate	300 ... 57,6 kBit/s
Connection method	D-SUB 9 (socket)
File format/coding	Asynchronous
Data flow control/protocols	RTS/CTS
Designation	RS-485
Connection method	COMBICON plug-in screw terminal block

Supply

Supply voltage	24 V DC
Supply voltage range	11 V DC ... 30 V DC
Max. current consumption	250 mA (at 24 V DC)

General

Mounting position	any
Assembly instructions	on standard DIN rail NS 35 in accordance with EN 60715
Housing material	Polyamide PA non-reinforced with aluminum heatsink
Conformance	FCC Directive, Part 15.247
	ISC Directive RSS 210
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Connection method	Screw connection
Stripping length	8 mm

Wireless module - RAD-ISM-900-EN-BD-BUS - 2900017

Technical data

Connection data

Screw thread	M3
--------------	----

Standards and Regulations

Conformance	FCC Directive, Part 15.247
	ISC Directive RSS 210
UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D

Classifications

eCl@ss

eCl@ss 4.0	27250312
eCl@ss 4.1	27250312
eCl@ss 5.0	27242208
eCl@ss 5.1	27242208
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	19179290

ETIM


ETIM 2.0	EC000310
ETIM 3.0	EC000310
ETIM 4.0	EC000310
ETIM 5.0	EC000310

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	43223108
UNSPSC 11	39121008
UNSPSC 12.01	43223108
UNSPSC 13.2	43223108

Drawings

Block diagram

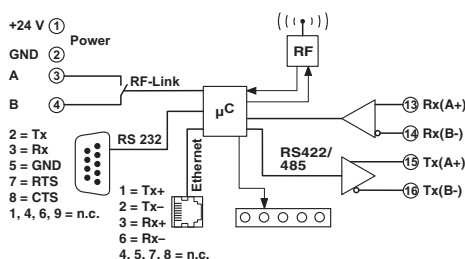

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Wireless transceiver (transmitter and receiver) with Ethernet, RS-232, RS-485 interfaces and bus foot, for 900 MHz ISM band (America).This product is exclusively for export outside of the European Economic Area (EEA).	2900017	RAD-ISM-900-EN-BD-BUS	Buy on EAN