



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Interface module - UMK- EC90/32/EX-XOL - 2900110

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, for ELCO connector in Ex i protection type, for mounting on NS 35/7.5 or NS 32, with pin strip 8016 left, no. of positions 32

The figure shows version UMK-EC90/32/EX-XUR

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 472210

Technical data

Dimensions

Width	101.3 mm
Height	77 mm
Depth	58.5 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	max. 30 V DC (Max. voltage between two intrinsically safe circuits: 60 V DC)
Max. perm. current (per branch)	500 mA
Number of positions	32
Mounting position	any
Assembly instructions	Can be aligned without distance (50 mm distance to the non-intrinsically safe connections)
Standards/regulations	DIN EN 60079-11

Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm

Interface module - UMK- EC90/32/EX-XOL - 2900110

Technical data

Connection data for connection 1

Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12
Number of positions	32

Connection data for connection 2

Connection name	Controller level
Connection method	ELCO connector
Number of connections	1
Number of positions	90
Note	Coding pins are in the 1-1 position

Standards and Regulations

Standards/regulations	DIN EN 60079-11
-----------------------	-----------------

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780


UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Drawings

Interface module - UMK- EC90/32/EX-XOL - 2900110

Dimensional drawing

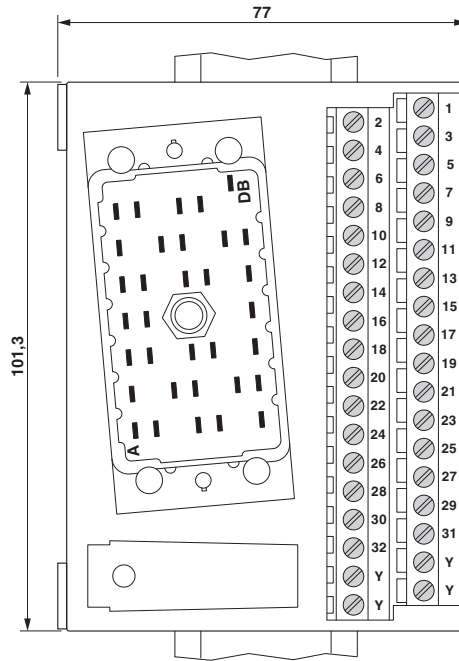

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
VARIOFACE module, for ELCO connector in Ex i protection type, for mounting on NS 35/7.5 or NS 32, with pin strip 8016 left, no. of positions 32	2900110	UMK- EC90/32/ EX-XOL	Buy on EAN