



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Active module - UM- 8RM/KSR-G24/21/MS/PLC - 2900890

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE output module, with 8 miniature relays, 1 PDT with detectable manual operation each, plugged, for 24 V DC (incl. relay)

Why buy this product

- Narrow design width of just 92 mm (8 channels) or 285 mm (32 channels)
- Plug-in miniature relays each with a PDT and detectable manual operation
- Supply voltage indicator (LED)
- LED status indicator and freewheeling diode per signal path (integrated in relay)



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 545099

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	92 mm
Height	111 mm
Depth	64 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Input data

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.9 ... 1.1

Active module - UM- 8RM/KSR-G24/21/MS/PLC - 2900890

Technical data

Input data

Typical input current at U_N	18 mA
Typical response time	9 ms
Typical release time	6 ms
Type of protection	Free-wheeling diode (integrated in relay)
Operating voltage display	Green LED
Status display/channel	Yellow LED (integrated in relay)

Output data

Contact type	Single contact, 1-PDT
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V AC/DC
Limiting continuous current	5 A
Min. switching current	10 mA
Interrupting rating (ohmic load) max.	120 W (24 V DC)
	62 W (48 V DC)
	48 W (60 V DC)
	55 W (110 V DC)
	66 W (220 V DC)
	1250 VA (250 V AC)

General

No. of channels	8
With components	Yes
Mechanical service life	5×10^6 cycles
Operating mode	100% operating factor
Degree of protection	IP00
Mounting position	any
Assembly instructions	In rows with zero spacing
Color	green
Designation	Air and creepage distances, output/output
Standards/regulations	DIN EN 50178
	IEC 60664
	IEC 62103
Rated insulation voltage	260 V AC
Rated surge voltage	4 kV (Basic insulation between output contact current paths)
	6 kV (Safe isolation and reinforced insulation between input circuit and output contact paths)
Degree of pollution	2
Overvoltage category	III

Connection data for connection 1

Active module - UM- 8RM/KSR-G24/21/MS/PLC - 2900890

Technical data

Connection data for connection 1

Connection name	Controller level
Connection method	IDC/FLK pin strip (2.54 mm)
Number of connections	1
Number of positions	14

Connection data for connection 2

Connection name	Field level
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data for connection 3

Connection name	Supply
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12
Number of connections	4

Supported controller

Corresponding control	MITSUBISHI MELSEC Q
Corresponding I/O card	QY82P
Corresponding control	MITSUBISHI MELSEC L
Corresponding I/O card	LY41PT1P
	LY42PT1P

Standards and Regulations

Designation	Air and creepage distances, output/output
Standards/regulations	DIN EN 50178
	IEC 60664
	IEC 62103
Degree of pollution	2
Overvoltage category	III

Classifications

eCl@ss

eCl@ss 4.0	27371102
------------	----------

Active module - UM- 8RM/KSR-G24/21/MS/PLC - 2900890

Classifications

eCl@ss

eCl@ss 4.1	27371102
eCl@ss 5.0	27371001
eCl@ss 5.1	27371001
eCl@ss 6.0	27371001
eCl@ss 7.0	27371001
eCl@ss 8.0	27371601
eCl@ss 9.0	27371601

ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39121515

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC

Drawings

Active module - UM- 8RM/KSR-G24/21/MS/PLC - 2900890

Circuit diagram

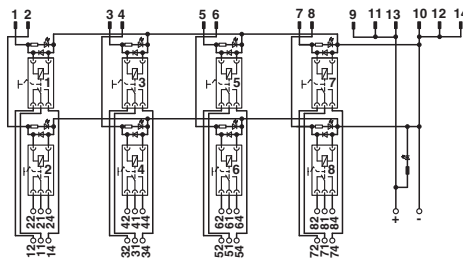

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
VARIOFACE output module, with 8 miniature relays, 1 PDT with detectable manual operation each, plugged, for 24 V DC (incl. relay)	2900890	UM- 8RM/KSR-G24/21/MS/PLC	Buy on EAN