



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Interface module - DFLK 26/FKCT - 2903039

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The VARIOFACE feed-through module implements a 1:1 connection between a push-in spring-cage connection and an IDC/FLK pin strip (2.54 mm, number of positions: 26).

Key Commercial Data

| | |
|--------------|---------------------|
| Packing unit | 1 STK |
| GTIN | 4 046356 709415 |

Technical data

Dimensions

| | |
|-------|---------|
| Width | 36.5 mm |
|-------|---------|

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

General

| | |
|---------------------------------|--------------------------------|
| Max. perm. operating voltage | < 50 V AC |
| | 60 V DC |
| Max. perm. current (per branch) | 1 A |
| Number of positions | 26 |
| Status display | No |
| Mounting position | any |
| Degree of protection | IP20 |
| Standards/regulations | DIN EN 50178 |
| | IEC 60664 |
| | IEC 62103 |
| Rated insulation voltage | 63 V |
| Rated surge voltage | 0.6 kV (Functional insulation) |
| Degree of pollution | 2 |
| Overvoltage category | II |

Connection data for connection 1

| | |
|-----------------|-------------|
| Connection name | Field level |
|-----------------|-------------|

Interface module - DFLK 26/FKCT - 2903039

Technical data

Connection data for connection 1

| | |
|----------------------------------|---|
| Connection method | Plug-in push-in spring-cage connection |
| Stripping length | 10 mm |
| Conductor cross section solid | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section AWG | 24 ... 12 |

Connection data for connection 2

| | |
|-----------------------|-----------------------------|
| Connection name | Controller level |
| Connection method | IDC/FLK pin strip (2.54 mm) |
| Number of connections | 1 |
| Number of positions | 26 |

Standards and Regulations

| | |
|-----------------------|--------------|
| Standards/regulations | DIN EN 50178 |
| | IEC 60664 |
| | IEC 62103 |
| Degree of pollution | 2 |
| Overvoltage category | II |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250313 |
| eCl@ss 6.0 | 27242608 |
| eCl@ss 7.0 | 27141152 |
| eCl@ss 8.0 | 27141152 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001434 |
| ETIM 3.0 | EC001604 |
| ETIM 4.0 | EC001604 |
| ETIM 5.0 | EC002780 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11 | 39121421 |
| UNSPSC 12.01 | 39121421 |
| UNSPSC 13.2 | 39121421 |

Interface module - DFLK 26/FKCT - 2903039

Approvals

Approvals

Approvals

EAC

Ex Approvals


Approvals submitted

Approval details


| |
|-----|
| EAC |
|-----|

Drawings

Dimensional drawing

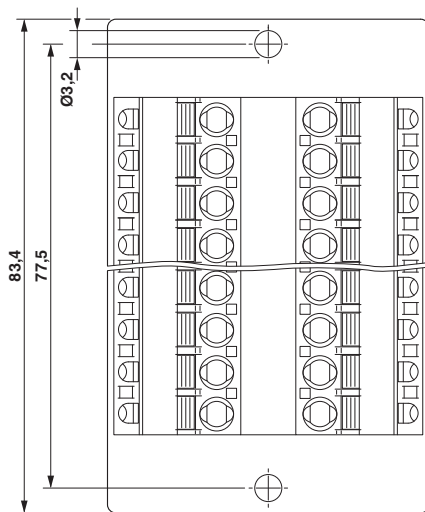


Dimensional drawing

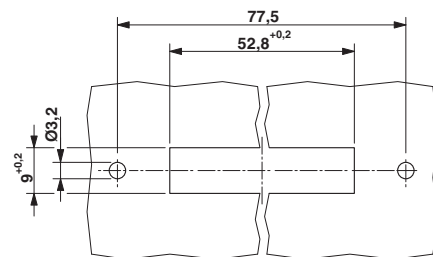

Interface module - DFLK 26/FKCT - 2903039

Dimensional drawing

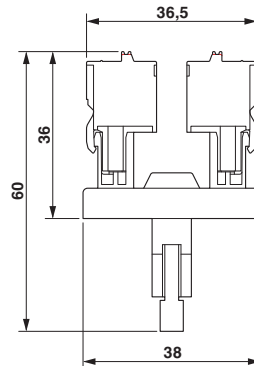

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product | Code | Reference | Product link |
|---|-------------|------------------|----------------------------|
| The VARIOFACE feed-through module implements a 1:1 connection between a Push-in spring-cage connection and an IDC/FLK pin strip (2.54 mm, number of positions: 26). | 2903039 | DFLK 26/ FKCT | Buy on EAN |