



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

## Interface module - VIP-2/PT/D15SUB/F - 2903780

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with push-in connection and D-SUB miniature socket strip, for mounting on NS 35 rails, 15-pos.

The illustration shows a 15 position version with male D-sub connector.

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 796552

### Technical data

#### Dimensions

Width	46.9 mm
Height	72.1 mm
Depth	63 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Max. perm. operating voltage	125 V AC/DC
Max. perm. current (per branch)	2 A
Number of positions	15
Status display	No
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Rated surge voltage	1.2 kV
Degree of pollution	2
Overvoltage category	II

#### Connection data for connection 1

# Interface module - VIP-2/PT/D15SUB/F - 2903780

## Technical data

### Connection data for connection 1

Connection name	Field level
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 14

### Connection data for connection 2

Connection name	Controller level
Connection method	D-SUB socket strip
Number of connections	1
Number of positions	15

### Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	II

## Classifications

### eCl@ss

eCl@ss 4.0	27371001
eCl@ss 4.1	27371001
eCl@ss 5.0	27371001
eCl@ss 5.1	27371001
eCl@ss 6.0	27371001
eCl@ss 7.0	27371001
eCl@ss 8.0	27141152

### ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC000196
ETIM 5.0	EC002780

### UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121542

# Interface module - VIP-2/PT/D15SUB/F - 2903780

## Classifications

### UNSPSC

UNSPSC 13.2	39121515
-------------	----------

## Approvals

### Approvals


#### Approvals


CSA / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized


#### Ex Approvals

#### Approvals submitted

## Approval details

CSA 	
mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	2 A
Nominal voltage U <sub>N</sub>	105 V

UL Recognized 	
mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	2 A
Nominal voltage U <sub>N</sub>	125 V

cUL Recognized 	
mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	2 A
Nominal voltage U <sub>N</sub>	125 V

# Interface module - VIP-2/PT/D15SUB/F - 2903780

## Approvals


EAC

EAC

cULus Recognized  US

## Drawings

Circuit diagram

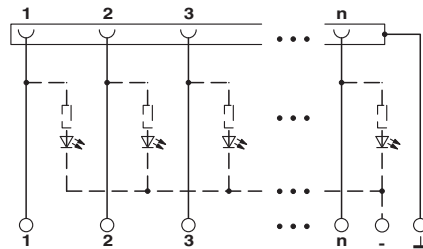

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
VARIOFACE module, with push-in connection and D-SUB miniature socket strip, for mounting on NS 35 rails, 15-pos.	2903780	VIP-2/PT/ D15SUB/F	<a href="#">Buy on EAN</a>