



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

## Type 2 surge protection plug - VAL-SEC-T2-N/PE-175-P - 2905356

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Replacement plug for surge arresters from the VALVETRAB SEC product range for the N-PE path.

### Why buy this product

- Varistor arrester free of leakage current
- High-performance gas-filled surge arrester for N/PE protection
- Extremely narrow design, just 12 mm per position
- High continuous voltage of 350 V AC for 230/400 V AC networks with high voltage fluctuations
- Pluggable
- Low voltage protection level of 1.5 kV
- Optical, mechanical status indicator
- Plugs can be checked with CHECKMASTER 2

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 948227

### Technical data

#### Dimensions

Height	46.4 mm
Width	11.7 mm
Depth	59.4 mm
Horizontal pitch	0.6 Div.

#### Ambient conditions

Degree of protection	IP20
	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (half sinus / 11 ms / 3x ±X, ±Y, ±Z)

# Type 2 surge protection plug - VAL-SEC-T2-N/PE-175-P - 2905356

## Technical data

### Ambient conditions

Vibration (operation)	5g (10 ... 500 Hz / 2.5 h / X, Y, Z)
-----------------------	--------------------------------------

### General

Standards/specifications	IEC 61643-11 2011
	EN 61643-11 2012
IEC test classification	II
	T2
EN type	T2
IEC power supply system	TN
	TT
SPD design	Voltage-switching type
Mode of protection	N-PE
Mounting type	On base element
Color	light grey RAL 7035
Housing material	PA 6.6-FR 20% GF
	PBT-FR
Degree of pollution	2
Flammability rating according to UL 94	V-0
Type	DIN rail module, two-section, divisible
Number of positions	1
Surge protection fault message	optical

### Protective circuit

Nominal voltage $U_N$	120 V AC (TN - only N-PE)
	120 V AC (TT - only N-PE)
Nominal frequency $f_N$	50 Hz (60 Hz)
Maximum continuous voltage $U_C$	150 V AC
Residual current $I_{PE}$	$\leq 1 \mu A$
Nominal discharge current $I_n$ (8/20) $\mu s$	20 kA
Maximum discharge current $I_{max}$ (8/20) $\mu s$	40 kA
Follow current interrupt rating $I_{fi}$	100 A (150 V AC)
Voltage protection level $U_p$	$\leq 0.95$ kV
Residual voltage $U_{res}$	$\leq 0.4$ kV (at $I_n$ )
	$\leq 0.4$ kV (at 10 kA)
	$\leq 0.4$ kV (at 5 kA)
	$\leq 0.4$ kV (at 4 kA)
	$\leq 0.4$ kV (at 2 kA)
Front of wave sparkover voltage at 6 kV (1.2/50) $\mu s$	$\leq 0.95$ kV
TOV behavior at $U_T$	1200 V AC (200 ms / withstand mode)
Response time $t_A$	$\leq 100$ ns

### UL specifications

# Type 2 surge protection plug - VAL-SEC-T2-N/PE-175-P - 2905356

## Technical data

### UL specifications

SPD Type	4CA
Maximum continuous operating voltage MCOV (N-G)	150 V AC
Mode of protection	N-G
Power distribution system	1
Nominal frequency	50/60 Hz
Measured limiting voltage MLV (N-G)	560 V
Nominal discharge current I <sub>n</sub> (N-G)	20 kA
Follow current (N-G)	200 A (150 V AC)

## Classifications

### eCl@ss

eCl@ss 5.1	27130801
eCl@ss 6.0	27130805
eCl@ss 8.0	27130805
eCl@ss 9.0	27130805

### ETIM

ETIM 5.0	EC000941
----------	----------

## Approvals

### Approvals

---

#### Approvals

UL Recognized / KEMA-KEUR / cUL Recognized / CCA / IECCE CB Scheme / GL / EAC / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted





---

### Approval details

UL Recognized
---------------


# Type 2 surge protection plug - VAL-SEC-T2-N/PE-175-P - 2905356

## Approvals



## Drawings

Dimensional drawing

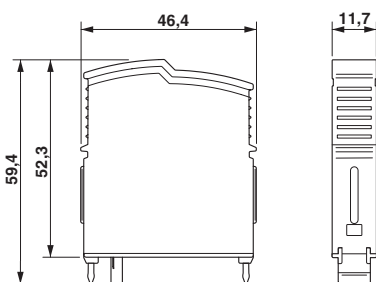

Circuit diagram





Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Replacement plug for surge arresters from the VALVETRAB SEC product range for the N-PE path.	2905356	VAL-SEC-T2-N/ PE-175-P	<a href="#">Buy on EAN</a>