



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Electronic housing - ME 22,5 F-UTG TBUS KMGY - 2914851

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Component housing without vents, Lower part, Cross connection: DIN rail bus connector, Color: light gray, Width: 22.5 mm, Constructional height: 106 mm, Number of positions cross connector: 5

Why buy this product

- Item is from the ME product range
- Tool-free mounting
- Available in overall widths from 12.5 mm to 90 mm, modular extension is possible
- Inflammability class V0 according to UL 94
- Variety of connection technologies
- Can be mounted on the DIN rail
- Optional bus connector that is either integrated or mounted on the DIN rail

Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 964597

Technical data

General

Housing type	Component housing
Housing material	Polyamide
Color	light gray

Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C (depending on power dissipation)
---------------------------------	--

Dimensions

Length	99 mm
Constructional height	106 mm
Width	22.5 mm

Technical data

Flammability rating according to UL 94	V0
Power dissipation without gap	5.5 W

Electronic housing - ME 22,5 F-UTG TBUS KMGY - 2914851

Technical data

Technical data

Power dissipation with 20 mm gap	9.6 W
Number of positions	16
	24

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Classifications

eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

UL Recognized


Ex Approvals

Electronic housing - ME 22,5 F-UTG TBUS KMGY - 2914851

Approvals


Approvals submitted

Approval details

UL Recognized 

Drawings

Dimensional drawing

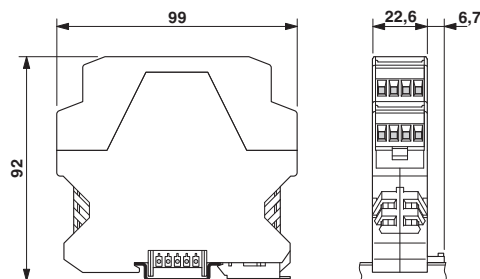

Dimensions of the electronic housing ME 22,5 flat.../TBUS... with double-level upper part

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Component housing without vents, Lower part, Cross connection: DIN rail bus connector, Color: light gray, Width: 22.5 mm, Constructional height: 106 mm, Number of positions cross connector: 5	2914851	ME 22,5 F-UTG TBUS KMGY	Buy on EAN