At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. HERE

Fuse plug - P-FU 5X20 LED 60-5 - 3209251

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid
(http://phoenixcontact.com/download)

Fuse plug, Nominal current: 6.3 A, Width: 5.2 mm, Fuse type: G / 5 x 20, Fuse type: Glass / ceramics / ..., Mounting type: Plug-in mounting, Color: black

Why buy this product

- Large-surface labeling option
- Test contacts on both sides of the fuse
- Versions with bipolar defect indicator
- Can be used for overload/short-circuit protection

Key Commercial Data

Packing unit	10 STK
GTIN	4 046356 548359

Technical data

General

Note	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
Number of levels	1
Color	black
Insulating material	PA
Flammability rating according to UL 94	V0

Dimensions

Width	5.2 mm
Length	23.5 mm

General

Fuse	G / 5 x 20
Fuse type	Glass / ceramics / ...
Degree of pollution	3
Maximum power dissipation	1.6 W (Short-circuit and overload protection)
LED voltage range	30 V AC/DC ... 60 V AC/DC
LED current range	0.36 mA ... 0.00095 A

Fuse plug - P-FU 5X20 LED 60-5 - 3209251

Technical data

General

Maximum load current	6.3 A (the current is determined by the fuse used)
Nominal current I_N	6.3 A (the current is determined by the fuse used)
Open side panel	No

Standards and Regulations

Connection in acc. with standard	CSA
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	27142001
eCl@ss 4.1	27142001
eCl@ss 5.0	27142001
eCl@ss 5.1	27142001
eCl@ss 6.0	27141149
eCl@ss 7.0	27141149
eCl@ss 8.0	27142001

ETIM

ETIM 4.0	EC002018
ETIM 5.0	EC000036

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / CSA / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Fuse plug - P-FU 5X20 LED 60-5 - 3209251

Approvals

Approval details

UL Recognized

Nominal current IN	10 A
Nominal voltage UN	60 V

cUL Recognized

Nominal current IN	10 A
Nominal voltage UN	60 V

CSA

Nominal current IN	10 A
Nominal voltage UN	60 V

EAC

cULus Recognized

Drawings

Fuse plug - P-FU 5X20 LED 60-5 - 3209251

Application drawing

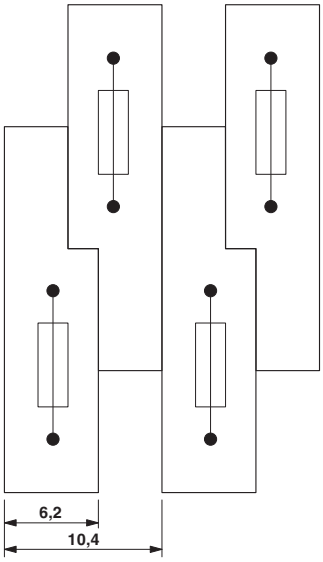

Application drawing

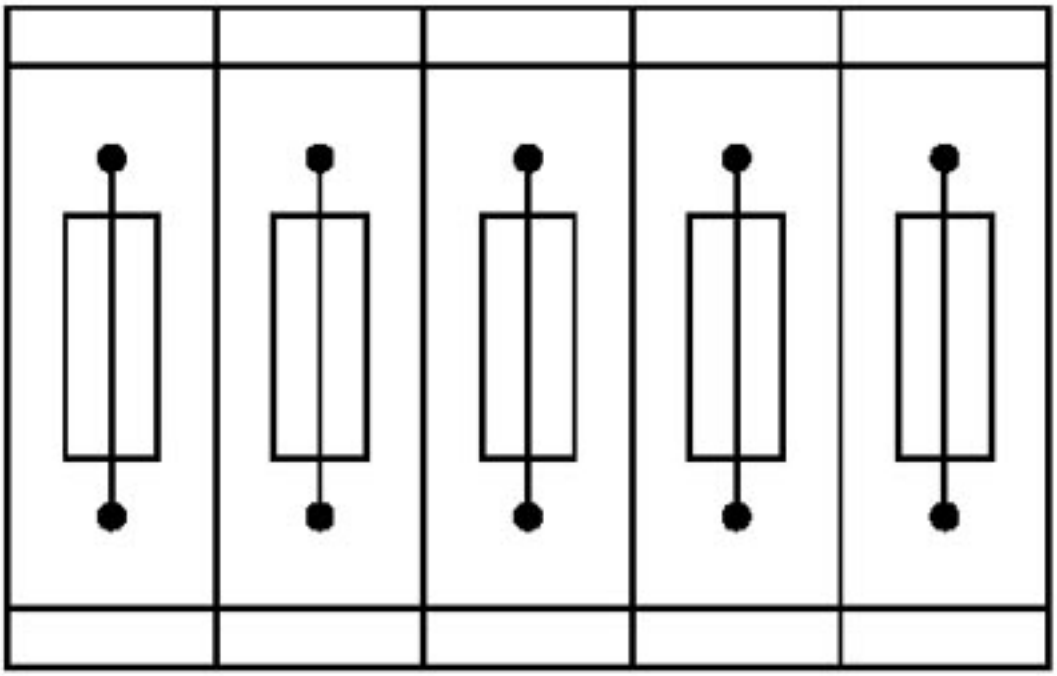

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

Fuse plug - P-FU 5X20 LED 60-5 - 3209251

Application drawing

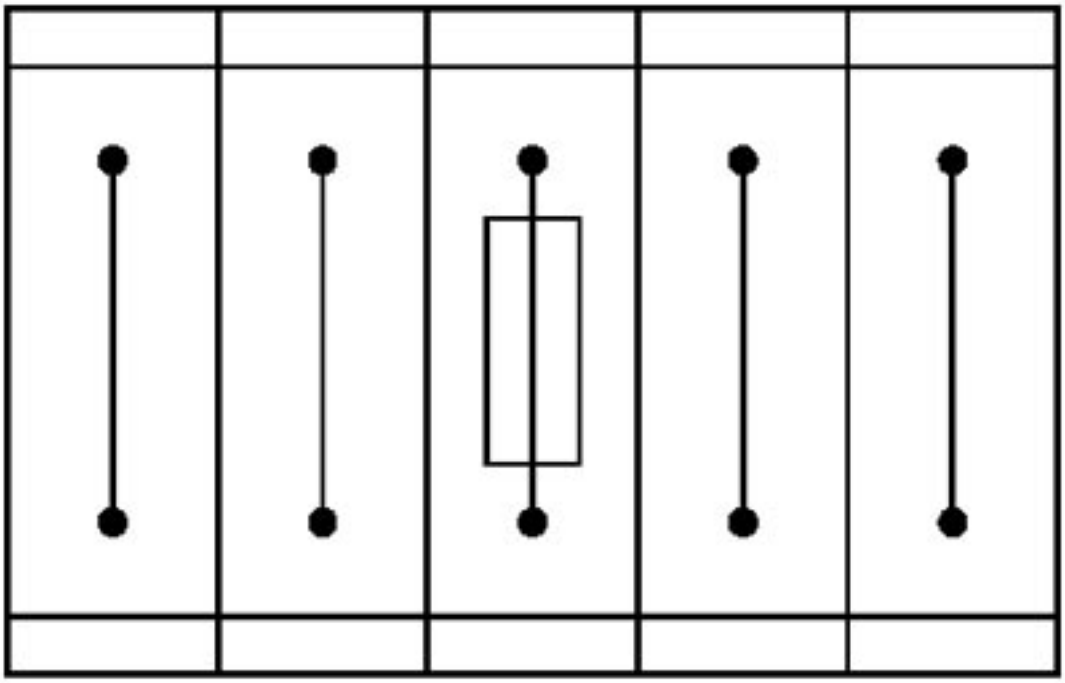

Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

Phoenix Contact 2016 © - all rights reserved
http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
http://www.phoenixcontact.com

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
Fuse plug, Nominal current: 6.3 A, Width: 5.2 mm, Fuse type: G / 5 x 20, Fuse type: Glass, Mounting type: Plug-in mounting, Color: black	3209251	P-FU 5X20 LED 60-5	Buy on EAN